

PCTWORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶: G01N 21/07, B01L 3/00, G01N 33/487	A1	(11) International Publication Number: WO 97/21090 (43) International Publication Date: 12 June 1997 (12.06.97)
(21) International Application Number: PCT/US96/19514 (22) International Filing Date: 5 December 1996 (05.12.96) (30) Priority Data: 60/008,215 5 December 1995 (05.12.95) US 60/008,267 6 December 1995 (06.12.95) US 60/008,819 18 December 1995 (18.12.95) US 60/023,756 12 August 1996 (12.08.96) US (71) Applicant: GAMERA BIOSCIENCE [US/US]; 26 Lansdowne Street, Cambridge, MA 02139 (US). (72) Inventors: MIAN, Alec; 137 Magazine Street, Cambridge, MA 03139 (US). KIEFFER-HIGGINS, Stephen, G.; 30 Beaumont Street, Dorchester, MA 02124 (US). COREY, George, D.; 65 Harding Street, Newton, MA 02165 (US). (74) Agent: NOONAN, Kevin, E.; McDonnell Boehnen Hulbert & Berghoff, Suite 700, 300 South Wacker Drive, Chicago, IL 60606 (US).	(81) Designated States: AL, AM, AT, AU, AZ, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, UZ, VN, ARIPO patent (KE, LS, MW, SD, SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CL, CM, GA, GN, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i>	
(54) Title: DEVICES AND METHODS FOR USING CENTRIPETAL ACCELERATION TO DRIVE FLUID MOVEMENT IN A MICROFLUIDICS SYSTEM WITH ON-BOARD INFORMATICS		
(57) Abstract <p>This invention relates to methods and apparatus for performing microanalytic and microsynthetic analyses and procedures. The invention provides a microsystem platform and a micromanipulation device for manipulating the platform that utilizes the centripetal force resulting from rotation of the platform to motivate fluid movement through microchannels. The microsystem platforms of the invention are also provided having system informatics and data acquisition, analysis and storage and retrieval informatics encoded on the surface of the disk opposite to the surface containing the fluidic components. Methods specific for the apparatus of the invention for performing any of a wide variety of microanalytical or microsynthetic processes are provided.</p>		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland			SI	Slovenia
CI	Ivory Coast				
CM	Cameroun				
CO	Colombia				
CR	Costa Rica				
CU	Cuba				
CY	Cyprus				
CZ	Czechia				
DE	Germany				
DK	Denmark				
EE	Estonia				
ES	Spain				
FI	Finland				
FR	France				
GA	Gabon				
GB	United Kingdom				
GD	Grenada				
GE	Georgia				
GH	Ghana				
GI	Gibraltar				
GL	Greenland				
GN	Guinea				
GP	Guadeloupe				
GQ	Equatorial Guinea				
GR	Greece				
GT	Guatemala				
GU	Guam				
GW	Guinea-Bissau				
GY	Guyana				
HA	Haiti				
HN	Honduras				
HR	Croatia				
HT	Haiti				
HU	Hungary				
ID	Indonesia				
IE	Ireland				
IL	Israel				
IN	India				
IO	British Indian Ocean Territory				
IQ	Iraq				
IR	Iran				
IS	Iceland				
IT	Italy				
JE	Jersey				
JM	Jamaica				
JO	Jordan				
JP	Japan				
KE	Kenya				
KG	Kyrgyzstan				
KH	Kampuchea				
KI	Kiribati				
KM	Comoros				
KN	St. Kitts and Nevis				
KO	Korea				
KR	South Korea				
KU	Kuwait				
KV	Kuwait				
KW	Kuwait				
KY	Cayman Islands				
KZ	Kazakhstan				
LA	Laos				
LB	Lebanon				
LC	St. Lucia				
LI	Liechtenstein				
LK	Sri Lanka				
LR	Liberia				
LS	Lesotho				
LT	Lithuania				
LU	Luxembourg				
LV	Latvia				
LY	Libya				
MA	Morocco				
MC	Monaco				
MD	Republic of Moldova				
ME	Montenegro				
MG	Madagascar				
MH	Marshall Islands				
MI	Maldives				
ML	Mali				
MM	Myanmar				
MN	Mongolia				
MO	Macao				
MP	Marshall Islands				
MQ	Martinique				
MR	Morocco				
MS	Montserrat				
MT	Malta				
MU	Mauritius				
MV	Maldives				
MW	Malawi				
MX	Mexico				
MY	Malaysia				
MZ	Mozambique				
NA	Namibia				
NC	New Caledonia				
NE	Niger				
NG	Nigeria				
NL	Netherlands				
NO	Norway				
NP	Nepal				

Devices and Methods for Using Centripetal Acceleration to Drive Fluid Movement in a Microfluidics System with On-board Informatics

This application claims priority to U.S. Provisional Applications, Serial Nos. 60/008,215, filed December 5, 1995, 60/008,267, filed December 6, 1995, 60/008,819, filed December 18, 1995, and 60/023,756, filed August 12, 1996, the disclosures of each of which are explicitly incorporated by reference herein.

BACKGROUND OF THE INVENTION

1. Field of the Invention

This invention relates to methods and apparatus for performing microanalytic and microsynthetic analyses and procedures. In particular, the invention relates to microminiaturization of genetic, biochemical and chemical processes related to analysis, synthesis and purification. Specifically, the invention provides a microsystem platform and a micromanipulation device to manipulate the platform by rotation, thereby utilizing the centripetal forces resulting from rotation of the platform to motivate fluid movement through microchannels embedded in the microplatform. The microsystem platforms of the invention are also provided having system informatics and data acquisition, analysis and storage and retrieval informatics emcoded on the surface of the disk opposite to the surface containing the fluidic components. Methods for performing any of a wide variety of microanalytical or microsynthetic processes using the microsystems apparatus of the invention are also provided.

2. Background of the Related Art

In the field of medical, biological and chemical assays, a mechanical and automated fluid handling systems and instruments produced to operate on a macroscopic (*i.e.*, milliliters and milligrams) scale are known in the prior art.

U.S. Patent 4,279,862, issued July 21, 1981 to Bertaudiere *et al.* Disclose a centrifugal photometric analyzer.

U.S. Patent 4,381,291, issued April 26, 1983 to Ekins teach analytic measurement of free ligands

photometric analysis apparatus.

U.S. Patent 4,745,072, issued May 17, 1988 to Ekins discloses immunoassay in biological fluids.

U.S. Patent 5,160,702 issued November 3, 1992 to Kopf-Sill *et al.* discloses a
5 centrifuge rotor for analyzing solids in a liquid.

U.S. Patent 5,171,695, issued December 15, 1992 to Ekins discloses determination of analyte concentration using two labeling markers.

U.S. Patent 5,173,262 issued December 22, 1996 to Burtis *et al.* discloses a centrifuge rotor for processing liquids.

10 U.S. Patent 5,242,803, issued September 7, 1993 to Burtis *et al.* disclose a rotor assembly for carrying out an assay.

U.S. Patent 5,409,665, issued April 25, 1995 to Burd disclose cuvette filling in a centrifuge rotor.

U.S. Patent 5,413,732, issued May 9, 1995 to Buhl *et al.* teach preparation of
15 lyophilized reagent spheres for use in automated centrifugal blood analyzers.

U.S. Patent 5,432,009, issued July 11, 1995 to Ekins discloses a method for analyzing analytes in a liquid.

U.S. Patent 5,472,603 issued December 5, 1995 to Schembri discloses an analytical rotor for performing fluid separations.

20 Anderson, 1968, *Anal. Biochem.* 28: 545-562 teach a multiple cuvette rotor for cell fractionation.

Renoe *et al.*, *Clin. Chem.* 20: 955-960 teach a "minidisc" module for a centrifugal analyzer

Burtis *et al.*, *Clin. Chem.* 20: 932-941 teach a method for dynamic introduction
25 of liquids into a centrifugal analyzer.

Fritsche *et al.* 1975, *Clin. Biochem.* 8: 240-246 teach enzymatic analysis of blood sugar levels using a centrifugal analyzer.

Burtis *et al.*, *Clin. Chem.* 21: 1225-1233 a multipurpose optical system for use with a centrifugal analyzer

Lee *et al.*, 1978, *Clin. Chem.* 24: 1361-1365 teach an automated blood fractionation system.

Cho *et al.*, 1982, *Clin. Chem.* 28: 1965-1961 teach a multichannel electrochemical centrifugal analyzer.

5 Bertrand *et al.*, 1982, *Clinica Chimica Acta* 119: 275-284 teach automated determination of serum 5'-nucleotidase using a centrifugal analyzer.

Schembri *et al.*, 1992, *Clin. Chem.* 38: 1665-1670 teach a portable whole blood analyzer.

10 Walters *et al.*, 1995, Basic Medical Laboratory Technologies, 3rd ed., Delmar Publishers Boston teach a variety of automated medical laboratory analytic techniques.

Recently, microanalytical devices for performing select reaction pathways have been developed.

U.S. Patent 5,006,749, issued April 9, 1991 to White disclose methods and apparatus for using ultrasonic energy to move microminiature elements.

15 U.S. Patent No. 5,252,294, issued October 12, 1993 to Kroy *et al.* teach a micromechanical structure for performing certain chemical microanalyses.

U.S. Patent 5,304,487, issued April 19, 1994 to Wilding *et al.* teach fluid handling on microscale analytical devices.

20 U.S. Patent 5,368,704 issued November 29, 1994 to Madou *et al.* teach microelectrochemical valves.

International Application, Publication No. WO93/22053, published 11 November 1993 to University of Pennsylvania disclose microfabricated detection structures.

25 International Application, Publication No. WO93/22058, published 11 November 1993 to University of Pennsylvania disclose microfabricated structures for performing polynucleotide amplification.

Columbus *et al.*, 1987, *Clin. Chem.* 33: 1531-1537 teach fluid management of biological fluids.

Ekins *et al.*, 1992, *Ann. Biol. Clin.* 50: 337-353 teach a multianalytical microspot immunoassay.

The prior art discloses synthetic microchips for performing microanalytic and microsynthetic methods. One drawback in the prior art microanalytical methods and apparatus has been the difficulty in designing systems for moving fluids on the microchips through channels and reservoirs having diameters in the 10-100 μ m range. Also, the devices disclosed in the prior art have required separate data analysis and storage media to be integrated into an instrument for performing the microanalysis, thereby unnecessarily increasing the complexity of the instruments designed to use the microchips, without a concomitant increase in the flexibility or usefulness of these machines.

There remains a need for a simple, flexible, reliable, rapid and economical microanalytic and microsynthetic reaction platform for performing biological, biochemical and chemical analyses and syntheses that can move fluids within the structural components of a microsystems platform. Such a platform should be able to move nanoliter-to microliter amounts of fluid, including reagents and reactants, at rapid rates to effect the proper mixing of reaction components, removal of reaction side products, and isolation of desired reaction products and intermediates. There is also a need for an instrument for manipulating the microsystem platform to effect fluid movement, thermal control, reagent mixing, reactant detection, data acquisition, data analysis and data and systems interface with a user. Such devices are needed, in alternative embodiments, that are sophisticated (for professional, e.g., hospital, use), easy to use (for consumer, e.g., at-home monitoring, uses) and portable (for field, e.g., environmental testing, use). Such devices also advantageously combine "wet" chemistry capabilities with information processing, storing and manipulating ability.

SUMMARY OF THE INVENTION

This invention provides an integrated, microanalytical/microsynthetic system for performing a wide variety of biological, biochemical and chemical analyses on a microminiature scale. The invention provides apparatus and methods for performing

In one aspect of the invention is provided a microanalytic/microsynthetic system comprising a combination of two elements. The first element is a microplatform that is a rotatable structure, most preferably a disk, the disk comprising sample, inlet ports, fluid microchannels, reagent reservoirs, reaction chambers, detection chambers and sample outlet ports. The disk is rotated at speeds from about 1-30,000 rpm for generating centripetal acceleration that enables fluid movement. The disks of the invention also preferably comprise fluid inlet ports, air outlet ports and air displacement channels. The fluid inlet ports allow samples to enter the disk for processing and/or analysis. The air outlet ports and in particular the air displacement ports provide a means for fluids to displace air, thus ensuring uninhibited movement of fluids on the disk. Specific sites on the disk also preferably comprise elements that allow fluids to be analyzed, including thermal sources, light, particularly monochromatic light, sources, and acoustic sources, as well as detectors for each of these effectors. Alternatively, some or all of these elements can be contained on a second disk that is placed in optical or direct physical contact with the first.

The second element of the invention is a micromanipulation device that is a disk player/ reader device that controls the function of the disk. This device comprises mechanisms and motors that enable the disk to be loaded and spun. In addition, the device provides means for a user to operate the microsystems in the disk and access and analyze data, preferably using a keypad and computer display.

The invention provides methods and apparatus for the manipulation of samples consisting of fluids, cells and/or particles containing or comprising an analyte. The microplatform disks of the invention comprise microsystems composed of, but not restricted to, sample input ports, microchannels, chambers, valves, heaters, chillers, electrophoretic and detection systems upon a disk. Movement of the sample is facilitated by the judicious incorporation of air holes and air displacement channels that allow air to be displaced but prevent fluid and/or particle loss upon acceleration.

A preferred embodiment of the disk of the invention incorporates micromachined mechanical, optical, and fluidic control structures (or "systems") on a substrate that is preferably made from plastic, silica, quartz, metal or ceramic. These structures are

sample movement is controlled by centripetal or linear acceleration and the

selective activation of valves on the disk.

In preferred embodiments of the invention, a section of the disk is dedicated to information processing by standard read/write digital technology. Data resulting from processing and analysis is recorded on the disk surface using digital recording means.
5 In additional preferred embodiments, read-only memory (ROM) on the disk comprises disk information, instructions, experimental protocols, data analysis and statistical methods that can be accessed by a user operating the disk.

The process of fluid transport by centripetal acceleration and the micromanipulation device that enables such processing have a wide range of
10 applications in the synthesis and analysis of fluids and detection of analytes comprising a fluid, particularly a biological fluid. Chemical and biochemical reactions are performed in a reaction chamber on the disk by the selective opening of contiguous reagent chambers by means of capillary, mechanical or thermal valve mechanisms. The contents of those chambers are delivered to the reaction chamber with the application
15 of centripetal acceleration. The product of the reaction can then be used as a reagent for subsequent reactions, interrogated by detection systems or recovered.

Certain preferred embodiments of the apparatus of the invention are described in greater detail in the following sections of this application and in the drawings.

20

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1A (top view) and 1B (side view) illustrate the arrangement of reservoirs (12,14,18,20), valves (13,15,17,19,21,23,25) reaction chambers (16,22,24), ports (11,32) and air vents (29,33,34,35) in disks comprising the microplatforms of the invention. Figure 1C shows the arrangement of a multiplicity of microsystems on a disk

25

Figure 2A is a graph and Figure 2B is a schematic diagram of the arrangement of a channel on a disk of the invention as described with relation to Equation 5

Figure 3A is a graph and Figure 3B is a schematic diagram of the arrangement of a channel on a disk of the invention as described with relation to Equations 12 and 13.

30

Figure 4A is a graph and Figure 4B is a schematic diagram of the arrangement of a channel on a disk of the invention as described with relation to Equation 14

Figure 6 is a schematic diagram of a piezoelectric stack microvalve.

Figure 7 is a schematic diagram of a pneumatically-activated microvalve.

Figure 8 is a schematic diagram of device to deliver pneumatic pressure to a revolving disk.

5 Figure 9 is a schematic diagram of a bimetallic microvalve.

Figure 10 is a schematic diagram of a pressure-balanced microvalve.

Figure 11 is a schematic diagram of a polymeric relaxation microvalve.

Figures 12A and 12B represent two different embodiments of fluorescence detectors of the invention.

10 Figures 13A, 13B and 13C are a schematic diagrams of a multiple loading device for the disk.

Figures 14A through 14F illustrate laser light-activated CD-ROM capability of the disk of the invention.

15 Figure 15 is a flow diagram of the processor control structure of a player/reader device of the invention.

Figure 16 is a schematic diagram of a transverse spectroscopic detection chamber. Figures 17A through 17E are schematic diagrams of the different structural and functional layers of a disk of the invention configured for DNA sequencing.

20 Figure 17F is a schematic diagram of basic zones and design formats for analytic disks.

Figure 17G is a schematic diagram of a disk configured as a home test diagnostic disk

25 Figure 17H is a schematic diagram of a disk configured as a simplified immunocapacitance assay.

Figure 17I is a schematic diagram of a disk configured as a gas and particle disk.

Figure 17J is a schematic diagram of a hybrid disk comprising separately-assembled chips.

Figure 17K is a schematic diagram of a sample authorizing disk.

30 Figure 17L is a schematic diagram of a disk configured for pathological

Figure 17O is a schematic diagram of a disk for flow cytometry.

Figure 17P is a schematic diagram of a disk for microscopy applications.

Figure 17Q is a schematic diagram of a disk for immunoassay applications.

Figure 17R is a schematic diagram of a thin-layer chromatography disk.

5 Figure 18 is a schematic diagram of a disk configured for hematocrit determination.

Figure 19 is a schematic diagram of a disk configured for SPLITT fractionation of blood components.

Figure 20 is a schematic diagram of a disk configured as a DNA meltometer.

10 Figure 21 is a schematic diagram of a disk configured for DNA amplification.

Figure 22 is a schematic diagram of a disk configured for automated restriction enzyme digestion of DNA.

Figure 23 is a schematic diagram of a portion of a disk microsystem configured for DNA synthesis.

15 Figure 23B is a schematic diagram of a disk configured for a multiplicity of DNA oligonucleotide syntheses.

Figure 24 is a schematic diagram of a disk configured for DNA sequencing.

Figure 25 is a schematic diagram of a disk configured for iron assay.

Figure 26 is a schematic diagram of a disk configured for solid phase reaction.

20 Figure 27 is a schematic diagram of a disk configured for sample extraction.

Figure 28 is a schematic diagram of a disk configured for capillary electrophoresis.

Figure 28 is a schematic diagram of a disk configured for gel electrophoresis

Figure 29 is a schematic diagram of a transverse optical path in a microplatform.

25 Figure 30 is a block diagram of process flow in controlling informatics of the invention.

Figure 31 is a more detailed schematic diagram of controlling informatics of the invention.

30 Figure 32 is a more detailed schematic diagram of controlling informatics of the invention

FIG. 33 is a schematic diagram of a microplatform and a micromanipulation device.

This invention provides a microplatform and a micromanipulation device.

performing microanalytical and microsynthetic assays of biological, chemical, environmental and industrial samples. For the purposes of this invention, the term "sample" will be understood to encompass any chemical or particulate species of interest, either isolated or detected as a constituent of a more complex mixture, or synthesized from precursor species. The invention provides a combination of a microplatform that is a rotatable, analytic/synthetic microvolume assay platform (collectively referred to herein as a "disk") and a micromanipulation device for manipulating the platform to achieve fluid movement on the platform arising from centripetal force on the platform as result of rotation. The platform of the invention is preferably and advantageously a circular disk; however, any platform capable of being rotated to impart centripetal for a fluid on the platform is intended to fall within the scope of the invention.

The microplatforms of the invention (preferably and hereinafter collectively referred to as "disks"; for the purposes of this invention, the terms "microplatform", "microsystems platform" and "disk" are considered to be interchangeable), are provided to comprise one or a multiplicity of microsynthetic or microanalytic systems. Such microsynthetic or microanalytic systems in turn comprise combinations of related components as described in further detail herein that are operably interconnected to allow fluid flow between components upon rotation of the disk. These components can be fabricated as described below either integral to the disk or as modules attached to, placed upon, in contact with or embedded in the disk. The invention also comprises a micromanipulation device for manipulating the disks of the invention, wherein the disk is rotated within the device to provide centripetal force to effect fluid flow on the disk. Accordingly, the device provides means for rotating the disk at a controlled rotational velocity, for stopping and starting disk rotation, and advantageously for changing the direction of rotation of the disk. Both electromechanical means and control means, as further described herein, are provided as components of the devices of the invention. User interface means (such as a keypad and a display) are also provided.

The invention provides methods and apparatus for the manipulation of samples consisting of fluids, cells and/or particles (generically termed "sample" herein)

means for rotating the disk at a controlled rotational velocity, for stopping and starting disk rotation, and advantageously for changing the direction of rotation of the disk.

between components, temperature control elements, separation channels, electrophoresis channels and electrodes, air outlet ports, sample outlet ports, product outlet ports, mixing means including magnetic, acoustic and mechanical mixers, an on-board power supply such as a battery or electromagnetic generator, liquid and dry reagents, and other components as described herein or known to the skilled artisan. The movement of the sample is facilitated by the judicious incorporation of air holes or air displacement channels that allow air to be displaced but prevent fluid and/or particle loss upon acceleration. Preferably, the disk incorporates microfabricated mechanical, optical, and fluidic control components on platforms made from, *for example*, plastic, silica, quartz, metal or ceramic. For the purposes of this invention, the term "microfabricated" refers to processes that allow production of these structures on the sub-millimeter scale. These processes include but are not restricted to photolithography, etching, stamping and other means that are familiar to those skilled in the art.

Fluid (including reagents, samples and other liquid components) movement is controlled by centripetal acceleration due to rotation of the platform, and by the selective activation of valves controlling the connections between the components of the microsystems of the platform. The magnitude of centripetal acceleration required for fluid to flow at a rate and under a pressure appropriate for a particular microsystem is determined by factors including but not limited to the effective radius of the platform, the position angle of the structures on the platform with respect to the direction of rotation and the speed of rotation of the platform.

Chemical and biochemical reactions are performed in a reaction chamber by the selective opening of microvalves controlling access to contiguous reagent reservoirs. Microvalves as described in more detail below include mechanical, electrical and thermal valve mechanisms, as well as capillary microvalves wherein fluid flow is controlled by the relationship between capillary forces and centripetal forces acting on the fluid. The contents of the reagent reservoirs, that are connected a reaction chamber through microchannels controlled by such microvalves, are delivered to the reaction chamber by the coincident rotation of the microplatform and opening of the appropriate microvalves. The amount of reagent delivered to a reaction chamber is controlled by the

outlet port by the controlled opening of microvalves in the reaction chamber.

Analytical arrays constituting components of the microplatforms of the invention include detection systems for detecting, monitoring, quantitating or analyzing reaction course, products or side-products. Detection systems useful in the fabrication and use of the microplatforms of the invention include, but are not limited to, fluorescent, chemiluminescent, colorimetric, electrochemical and radioactivity detecting means. Optionally, the detection system can be integral to the platform, comprise a component of the device manipulating the platform, or both.

Thus, the microplatform and micromanipulation device provided by the invention produce analytic or synthetic data to be processed. Data processing is accomplished either by a processor and memory module on the disk, by the device microprocessor and memory, or by an out board computer connected to the micromanipulation device. Removable media for data retrieval and storage is provided either by the disk itself or by the device, using computer diskette, tape, or optical media. Alternatively and advantageously, data is written on the microplatform using CD-read/write technologies and conventional optical data storage systems. In such embodiments, data is written to the microplatform on the underside of the platform, opposite to the "wet" chemistry side holding the various microsystem components disclosed herein.

The physical parameters of the microplatforms of the invention are widely variable. When provided as a disk, the disk radius ranges from 1-25cm, and disk thickness ranges from 0.1mm to 10cm, more preferably 0.1 to 100mm. Preferred embodiments that are most advantageous for manufacturing and operation of the disks of the invention have dimensions within one or more of four pre-existing formats: (1) 3-inch compact disk (CD), having a radius of about 3.8cm and thickness of about 1mm; (2) 5-inch CD, having a radius of about 6cm and a thickness of 1mm; (3) 8-inch CDV (commercially termed a "Laservision" disk), having a radius of 10cm and a thickness of 2mm; and (4) 12-inch CDV disk, having a radius of 15cm and a thickness of 2mm.

Microchannel and reservoir sizes are optimally determined by specific applications and by the amount of reagent and reagent delivery rates required for each

to the actual displaced by the disk). Microchannel sizes can range from 0.1 m to a value close to the 1mm thickness of the disk. Microchannel and reservoir shapes can be trapezoid, circular or other geometric shapes as required. Microchannels preferably are embedded in a microsystem platform having a thickness of about 0.1 to 100mm, wherein
5 the cross-sectional dimension of the the microchannels across the thickness dimension of the platform is less than 500 μ m and from 1 to 90 percent of said cross-sectional dimension of the platform. Reagent reservoirs, reaction chambers, detections chambers and sample inlet and outlet ports preferably are embedded in a microsystem platform having a thickness of about 0.1 to 100mm, wherein the cross-sectional dimension of the
10 the microchannels across the thickness dimension of the platform is from 1 to 75 percent of said cross-sectional dimension of the platform.

Input and output (entry and exit) ports are components of the microplatforms of the invention that are used for the introduction of removal of a variety of fluid components. Entry ports are provided to allow samples and reagents to be placed on or
15 injected onto the disk; these types of ports are generally located towards the center of the disk. Exit ports are provided to allow air to escape, advantageously into an on-disk "muffler" or "baffle" system, to enable uninhibited fluid movement on the disk. Also included in air handling systems on the disk are air displacement channels, whereby the movement of fluids displaces air through channels that connect to the fluid-containing
20 microchannels retrograde to the direction of movement of the fluid, thereby providing a positive pressure to further motivate movement of the fluid. Exit ports are also provided to allow products to be removed from the disk. Port shape and design vary according specific applications. For example, sample input ports are designed, *inter alia*, to allow capillary action to efficiently draw the sample into the disk. In addition,
25 ports can be configured to enable automated sample/reagent loading or product removal. Entry and exit ports are most advantageously provided in arrays, whereby multiple samples are applied to the disk using a specifically-designed administration tool. Similar tools are useful designed to effect product removal from the microplatform. Representative arrangements of sample ports, air vents, reagent reservoirs, reaction
30 chambers and microvalves are shown in Figures 1A through 1C

force is a function of platform radius, disk rotation speed and fluid density. Certain functional parameters relevant to the platform microsystems of this invention are understood in terms of the following equations. These should represent limits of system performance, because they assume both viscous and non-viscous (turbulent) losses for fully-developed fluid flow.

The driving force for fluid motion or creating fluid pressures is the force on matter which results from centripetal acceleration. A device may rotate at an angular rate of f in revolutions/sec and angular frequency

$$\omega = 2\pi f \quad (1)$$

The centripetal acceleration (or acceleration oriented along the radius at a radial distance R from the center of the uniformly-rotating disk) is

$$a_c = \omega^2 R \quad (2)$$

A mass m in such uniform circular motion is subject to a centripetal force

$$F_c = ma_c = m\omega^2 R \quad (3)$$

which is directed inward along the radius to the center of rotation. If the mass is held fixed at this radius, the device causing rotation supplies this force; this is the origin of the static pressure in liquid columns discussed below. If the mass is placed on top of a trap-door above a radially-oriented tube, and the trap-door opened, the inertia of the mass will cause it to accelerate down the tube; this is the basis for driving fluids radially outward on a rotating disk.

Rotation may create a static pressure in a non-flowing fluid. Assume a column of liquid extending from an inner radius R_0 . The tube may be along the radius or inclined at an angle to the radius. Let the pressure at position R_0 be defined as P_0 , which is for example atmospheric pressure. The excess pressure due to rotation of the liquid at Position R such that $R_0 < R$ is found by integrating the centripetal force per unit area for liquid of density p from position R_0 to R :

$$P - P_0 = \int \rho a_c = \rho \omega^2 / 2 \times (R^2 - R_0^2) \quad (4)$$

If the tube is filled, extending from the center, then this pressure is

$$P - P_0 = (2.834 \times 10^{-4}) \rho f^2 R^2 \quad (5)$$

in pounds per square inch (psi) where R =radial position in cm, p =density in gm/cm³, and f =frequency in revolutions/sec. Thus, the pressure (or the amount of centripetal

To determine the velocity of liquid in motion in channels on a rotating disk, the equation of motion for the fluid must be solved. An element of fluid of radius a and length dR filling the circular channel has a mass dm subject to acceleration:

$$dm = \pi \rho a^2 dR \quad (6)$$

The equation of motion for this fluid element is force=(mass) X (acceleration). The forces are centripetal forces, capillary forces due to differences in interfacial energies between the fluid and vapor and fluid and solid surfaces, and dissipative forces due to the viscosity of the liquid and nonuniformity of flow. Capillary forces are ignored; it is understood that centripetal force and/or external pressure may need to be applied to force liquid into channels which are not wetted. As an over-estimate of these dissipative forces, both the force for fully-developed laminar flow of a Newtonian fluid (F_L) and that due to non-uniform flow (F_D) are included:

$$F = ma$$

$$F_c + F_L + F_D = dma_R \quad (7)$$

$$15 \quad F_c + F_L + F_D = (\rho \pi a^2 dR) a_R$$

where a_R is the acceleration of the fluid mass element along the radius and

$$F_c = (\rho \pi a^2 dR) \omega^2 R$$

$$F_L = - (8 \mu \pi a^2 dR) u \quad (8)$$

$$F_D = - (2 \rho \pi a^2 dR) u^2$$

where μ is the viscosity and u is the radial velocity of the fluid. These last two expressions are standard-mechanics expressions for fully-developed and completely undeveloped laminar flow, such as at channel entrances/exits or at the ends of a flowing droplet. Also note that for tubes or channels inclined at an angle θ with respect to the radius F_c would be replaced by $(F_c) \times \cos \theta$. The final equation becomes

$$25 \quad (\rho \pi a^2 dR) \omega^2 R - (8 \mu \pi dR) u - (2 \rho \pi a^2 u^2 dR) = (\rho \pi a^2 dR) (du / dt) \quad (9)$$

where the radial acceleration of the fluid is defined by $a_R = (du / dt)$. This is a differential equation for the fluid flow velocity.

This equation is solved for specific examples. Consider a droplet of fluid of length L moving in a radial channel of greater length than the droplet.

30 Because the fluid in the droplet all moves at the same velocity, dR may be replaced by L and R by the average position of the droplet, $\langle R \rangle = (R + L/2)$

been justified through comparison with numerical solutions. It consists of this: the negative terms on the left-hand-side almost entirely cancel the positive term. Then the right-hand-side can be set to 0 and a solution can be made to the resultant equation for the "terminal velocity" at position R, u_0

$$5 \quad (\omega^2 (R+L/2) / 2) - (8\mu / \rho a^2) u_0 - \frac{1}{2} (u_0^2 / L) = 0 \quad (11)$$

This is a quadratic equation which has the solution

$$u_0 = - (B + \sqrt{B^2 + 4AC}) / 2A \quad (12)$$

with

$$A = L/2$$

$$10 \quad B = 8\mu / \rho a^2 \quad (13)$$

$$C = (\omega^2 (R+L/2) / 2)$$

In conventional units these become $A=2/L$, $B=320\mu/\rho D^2$ and $C=(19.74)f^2(2R+L)$ with u_0 = fluid velocity in cm/sec; L =droplet length in cm; μ = viscosity in poise; ρ =fluid density in gm/cm³; $D = 2a$ = tube diameter in cm; and R = radial position of the fluid droplet in cm. As described, this expression gives the approximate velocity of a droplet of fluid in a tubular channel, the volume of the droplet resulting in droplet length being shorter than the channel length. This estimate assumes both viscous and non-viscous losses. The velocity of a fluid droplet will increase with increasing density and droplet volume (length), and decrease with increased viscosity. The velocity will increase with increased channel diameter, rotational velocity, and radial position.

Fluid flow velocity in a filled channel connecting a full chamber at position R_0 and receiving reservoir at position R_1 is calculated by defining L in equation (11) and subsequent equations as the channel length, $L = R_1 - R_0$. Then equation (13) with the definitions following equation (13) are used to calculate the flow velocity in the filled chamber as a function of radius

The rate of fluid-flow is the product of velocity and channel area:

$$Q = u_0 \pi a^2 = u_0 \pi D^2 / 4 \quad (14)$$

where Q = flow in mL/sec; u_0 = velocity in cm/sec (calculated from equations 12 and 13); and D = tube diameter in cm.

The time required to transfer a volume V from a reservoir to a receptacle through a tube or channel of length L depends on whether V is such that the tube is filled (length

divided by the rate of flow) or not (the time to fill the tube plus the time to transfer the volume V minus the volume of the tube divided by the rate of flow).

multiplied by the ratio of the tube length to the resultant droplet length:

$$Dt = V/Q, \text{ if } L \leq (4V/\pi D^2) \quad (15)$$

$$Dt = (V/Q) \times (4\pi D^2 L/4V), \text{ if } L > (4V/\pi D^2)$$

wherein Dt is the same time in seconds for fluid of volume V in mL flowing at rate Q in mL/sec to flow from a filled reservoir to a receptacle through a tube of length L and diameter D in cm. The rate of flow Q is calculated from eq. (14) and by extension equations (12) and (13) and the definitions of the parameters following equation (13). The time Dt increases with increasing volume transferred and decreases with increasing flow-rate.

Fluid characteristics such as pressure and velocity are related to physical parameters of the disk, such as disk radius and speed of rotation, as described above. These relationships are illustrated in Figures 2-5, derived from the above equations for water at room temperature, with $\rho = 1 \text{ gm/cm}^3$ and $\mu = 0.001$ poise. These figures delineate the most relevant parameters of fluid movement on a rotating disk.

Figure 2A illustrates the relationship between static pressure in a fluid-filled tube 30cm in length as a function of radial distance (R) and rotation rate (f), calculated from Equation 5. The arrangement of the tube on a rotating disk is shown in Figure 2B. It can be seen that pressures of between 0 and 10,000 psi can be generated in the tube at rotational speeds of 0 to 10,000 rpm. Pressures of this magnitude are conventionally used, for example, to drive high pressure liquid chromatography (HPLC).

Figure 3A shows the radial velocity of droplets having volume of 1, 10 and 100 μL droplets moving in an empty, 30cm long tube with a diameter of 1mm, calculated from Equations 12 and 13. The tube is aligned to extend along the radius of the disk from the center, and the disk is rotated at speeds of 100, 1,000 or 10,000 rpm. The arrangement of the tube on a rotating disk is shown in Figure 3B. These velocities may be used to calculate the transfer time for fluid droplets. For example, a 1 μL droplet flows at approximately 20cm/sec when at a position 2cm from the center of a disk rotating at 1,000 rpm. Hence, the time to flow through a 1cm tube can be calculated to be about 0.05 seconds. (For tubes oriented non-radially at an angle of 45° to the direction of rotation, the velocity drops by a factor of 30%.)

Figure 4A illustrates flow rates in a 5 cm fluid-filled tube of different diameters

Figure 4B illustrates the time to transfer a 1 μL droplet through a 5 cm tube, the tube diameter

(10 μ m, 100 μ m, or 1,000 μ m), and rotation frequency (100, 1,000 or 10,000 rpm). (As above, for tubes with a non-radial orientation of 45°, the velocity drops by a factor of 30%). Droplet velocities shown in Figure 3A were calculated by Equation 3 and flow rates determined using Equation 4

5 In Figures 5A, 5B and 5C, the time required to transfer 1, 10, and 100 μ L droplets, respectively, through a 5cm tube is shown. The tube connects two radially oriented reservoirs as illustrated in Figure 5D. Transfer times are a function of radial position of the tube (0-30cm), tube diameter (10 μ m, 100 μ m, or 1,000 μ m), and rotation frequency (100, 1,000 or 10,000 rpm). The curves shown in Figures 5A, 5B and 5C
10 were calculated using Equation 15.

Taken together, these formulate and graphs describe the interrelationship of disk radii and rotation speeds, channel lengths and diameters, and fluid properties such as viscosity and density in determining fluid velocities and flow rates on the disk. The assumptions behind these derivations include viscous losses due to Poiseuille (non-
15 turbulent) flow, with the addition of losses due to non-uniform flow of droplets and at tube inlet and outlet ports. These formulac and graphs provide lower limits for velocities and flow rates. Fluid velocities can range from less than 1cm/sec to more than 1,000cm/sec, and fluid flow rates from less than 1pL/sec to tens of mL/sec for rotation rates ranging from 1 to 30,000 rpm. By combining channel diameters and positions on
20 the disk, it is possible to carry out fluid transfer over a wide range of time scales, from milliseconds to hours and tens of hours for various processes.

Disk Coatings and Composition

Microplatforms such as disks and the components comprising such platforms are
25 advantageously provided having a variety of composition and surface coatings appropriate for a particular application among the wide range of applications disclosed herein. Disk composition will be a function of structural requirements, manufacturing processes, and reagent compatibility/chemical resistance properties. Specifically, disks are provided that are made from inorganic crystalline or amorphous materials, e.g.
30 silicon, silica, quartz, metals, or from organic materials such as plastics, for example, poly(methyl methacrylate) (PMMA), acetonitrile-butadiene-styrene (ABS), polycarbonate, polyethylene, polystyrene, polyolefins, polypropylene and metallocene. These may be used with unmodified or modified surfaces as described below.

5 tensile loading, or due to cracking and crazing, as described on Hertzberg (1989, *Deformation and Fracture Mechanics of Engineering Materials*, 3rd edition, Wiley & Sons: New York). These failures occur when the stress (defined as the load per unit area) due to rotation of the disk exceeds a critical value characteristic of the material used to make the disk. The "load" at any point in the disk is the force of tension due to rotation; i.e., at a given radius on the disk, the overall load is the centripetal force necessary to keep the material at larger radii moving circularly; the load/area or stress is then this force divided by the total area of the disk ($2\pi r \times$ the thickness of the disk). The critical value of stress at which a material will fail is termed the yield stress, and it depends on the cohesive energy binding the material together and the presence of defects in the material (such as crystalline defects in silicon or plastic substrate material). A defect-free material can be torn apart, whereas small defects will propagate through cracking or "crazing" (i.e., plastic deformation and failure of a formerly glassy plastic). For example, the yield strength of commercial silicon permits a 30cm disk to be spun at 10,000 rpm without mechanical failure when the diameter of internal channels and chambers is less than approximately 80% of the total thickness of the disk. In disks made of plastics, stresses on the disk are reduced in general due to the lower density of the plastic (which reduces the load/unit area). However, the yield strengths are also smaller by about two orders of magnitude than in silicon (as described in greater detail in Luis & Yannis, 1992, *Computational Modeling of Polymers*, (Bureitz, ed.), Marcel Dekker: New York). One solution to this problem is provided either by spinning a plastic 30cm disk at a slower speed (such as 1,000 rpm), or increasing the size of the disk radius (such as using a 4cm plastic disk for applications requiring 10,000 rpm rotation speeds). Thus, material choice specific for a particular application is sufficient to accommodate disk composition-related constraints on disk functional properties and characteristics.

30 Disk material in contact with fluids must also be resistant to degradation by reagent solutions (such as acetonitrile, polyacrylamide, high- or low-pH buffers) under rotational stress, upon heating and cooling, and in response to illumination with high-intensity ultraviolet or visible light (occurring, *inter alia*, with the use of certain detection means as described below). In addition, the surfaces presented to reagents and

1.1. especially to bus materials as substrates for microplatform fabrication. Silicon and

its oxides (essentially silica) are chemically attacked only by some peroxides (such as a mixture of hydrogen peroxide plus sulfuric acid), hydroxides (such as KOH), hydrofluoric acid (HF), either alone or in combination with alkali-based nitrates, and various perfluorinated solvents (like SF_6) see Iler, 1979, *The Chemistry of Silica*, Wiley & Sons: New York; *Properties of Silicon*, Xth ed., INSPEC, London, 1988). Silicon-based substrates are chemically inert to aliphatic and aromatic hydrocarbons (such as tetrahydrofuran, toluene, and the like), and are substantially inert when exposed to water and neutral aqueous solutions.

A wide variety of polymer-based (plastics) substrates are suitable for fabricating microsystems platforms of the invention. The most chemically-resistant polymer, poly(tetrafluoroethylene, PTFE), is not melt-processible but may be easily machined. PTFE is virtually chemically inert and can be used in most applications utilizing strong acids, bases, alkalis, halogenated solvents, or other strong chemical reagents. Other fluoropolymers (such as FEP, PFA) are more easily processed than PTFE and retain most of PTFE's chemical resistance. More easily-processed materials may be chosen for selective resistance: for example, although polyimides are highly resistant to alcohols, alkalis, aliphatic hydrocarbons, and bases (e.g., NaOH), their resistance to partially-halogenated solvents (e.g. dichlorobenzene) is poor. Poly (vinyl chloride) is strongly resistant to oxidizing acids and aliphatic hydrocarbons, while its resistance to aromatic compounds is poor. In addition, many materials that are not highly-resistant to concentrated applications of certain chemicals provide sufficient resistance to dilute solutions or provide sufficient resistance for single-use devices (e.g., polyamides and polyimides may be used with dilute solutions of certain acids such as acetic acid and hydrochloric acid). Most polymeric materials are resistant to water.

Specific chemical/polymer combinations include: formamide, lutidine, and acetonitrile with non-aromatic, non-polar polymers (polypropylene, polyethylene), dichloromethane with polycarbonates and aromatic polymers (polystyrene), ethanolamine and dimethyl sulfoxide with aliphatic and non-aromatic polymers (poly(methyl methacrylates), polyimides, polyamides). Fluoropolymers are resistant to all of the above chemical agents. Other solvents and reagents of interest, including

and Technology, 2nd ed., v. 3, pp 421-430, X ed., John Wiley & Sons, New York, 1989)

A small set of such materials provides sufficient flexibility for virtually any application.

The surface properties of these materials may be modified for specific applications. For example, appropriate surface-modification can either encourage or suppress cell and/or protein absorption. Surface modification can be achieved by silanization, ion implantation and chemical treatment with inert-gas plasmas (*i.e.*, gases through which electrical currents are passed to create ionization). A strong correlation has been established between water contact angle and cell adsorption, with hydrophilic surfaces showing significantly less cell adsorption than hydrophobic surfaces (*see Ikada, 1994, Biomaterials 15: 725*). Silicon, silica, and quartz present an inherently high-energy, hydrophilic surface. Alteration of surface properties is attained through hydroxylation (achieved by NaOH treatment at high temperatures) or silanization. Silanes and siloxanes are particularly appropriate for increasing the hydrophilicity of an otherwise hydrophobic surface. These compounds consist of one or several reactive head-groups which bond (chemically or through hydrogen-bonding) to a substrate, for example, a core region of alkane ($-CH_2O-$). These compounds also provide a route for more sophisticated alteration of surface properties (such as derivation with functional groups to obtain the surface properties of interest). A wide variety of such functionalities can be introduced at a surface, including vinyl, phenyl, methylene and methoxy groups, as well as surfaces providing mixed functionalities. These functional groups not only change gross properties like liquid contact angle, but provide sites for preferential adsorption of molecules, either *per se* or as a result of further conjugation of specific binding moieties such as peptides, antibodies or the like. Silation is most often accomplished through immersion in aqueous solution at slightly-elevated temperatures. The chemical resistance of silane and siloxane coatings is determined by the nature of bonding within the chemisorbed molecule (Arkles, 1977, *Chemtech* 2: 125). It should be noted that such properties as hydrophobicity are maintained for significant periods when organosilanes are in contact with quite corrosive acids.

energies through the formation of surface complexes, for example, hydroxyl-rich surfaces for increased hydrophilicity, or perfluorinated surfaces for increased hydrophobicity. Surface graft polymerization is a technique used to graft polymers or oligomers with the desired surface properties to a substrate polymer chosen for its bulk processability and manufacturing properties, such as a plastic. Commercial methods for initiating graft polymerization include gamma radiation, laser radiation, thermal or mechanical processing, photochemical processes, plasma, and wet chemical processes (further discussed in *Encyclopedia of Polymer Science and Technology*, 2nd ed., (Supplement), Wiley & Sons: New York, 1989, pp 675-689). Chemical modification of polymer surfaces (and appropriate polymers) includes oxidations (polyethylenes), reductions (fluoropolymers), sulfonations, dehydrohalogenations (dehydrofluorination of poly(vinylidene fluoride)), and hydrolyses. While the chemical nature of the surface is altered through chemical modification, mechanical properties, durability and chemical resistance are primarily a function of the substrate plastic. For example, surface grafting of poly(ethylene glycol) (PEG) onto polyethylene yields a surface that is both hydrophilic (unlike polyethylene) and resistant to water (PEG is itself soluble in water, while polyethylene is not). Finally, silation of organic polymer surfaces can also be performed, providing a wide variety of surface energy/chemistry combinations.

Embodiments comprising thin film disks are provided, comprising "layers" of microsystems disks stacked on a solid support, are useful for sequential assay with conservation of the disk and efficient and inexpensive use of the microsystem-comprising disks as consumables. An illustration of such disks are shown in Figure 17L. Such disks are capable of being uniquely identified, for example, by imprinting a barcode directly on the disk.

Particular examples of disks fabricated for a variety of applications is provided below in the Examples.

Disk-Related Devices and Elements

Microsystem platforms (microplatforms) of the invention are provided with a

100 101 102 103 104 105 106 107 108 109 110 111 112 113 114 115 116 117 118 119 120

certain devices and elements can be located external to the disk, optimally positioned on a device of the invention, or placed in contact with the disk.

1. Temperature control elements

5 Temperature control elements, particularly heating elements, include heat lamps, direct laser heaters, Peltier heat pumps, resistive heaters, ultrasonication heaters and microwave excitation heaters. Cooling elements include Peltier devices and heat sinks, radiative heat fins and other components to facilitate radiative heat loss. Thermal devices can be applied to the disk as a whole or in specific areas on the disk. The
10 thermal elements can be fabricated directly onto the disk, or can be fabricated independently and integrated onto the disk. Thermal elements can also be positioned external to the disk. The temperature of any particular area on the disk is monitored by resistive temperature devices (RTD), thermistors, liquid crystal birefringence sensors or by infrared interrogation using IR-specific detectors. Temperature at any particular
15 region of the disk can be regulated by feedback control systems. A micro-scale thermo-control system can be fabricated directly on the disk, fabricated on a microchip and integrated into the disk or controlled through a system positioned external to the disk.

2. Filters

20 Filters, sieving structures and other means for selectively retaining or facilitating passage of particulate matter, including cells, cell aggregates, protein aggregates, or other particulate matter comprising fluids applied to a microanalytical or microsynthetic disk of the invention. Such filtering means include microsieving structures that are fabricated directly into a fluid handling structure on the disk (*e.g.*, U.S. Patent 5,304,487;
25 International Application, Publication No. WO93/22053; Wilding *et al.*, 1994, *Automat. Analyt. Tech.* 40: 43-47) or fabricated separately and assembled into the fluid handling structures. The sieving structures are provided with a range of size exclusion orifices and are optionally arranged sequentially so as to fractionate a sample based upon the

constituents. The electrostatic composition of the sieving materials may be inherent to the material or bestowed upon it by virtue of a charge delivered to the material through an electronic circuit. The materials captured by the filter material can be irreversibly bound or can be selectively eluted for further processing by adjusting the composition and ionic strength of buffers or, in the case of an electronically regulated material, by modulating the electronic state of the material.

In yet other embodiments of the filters of the microsystem platforms of this invention, specific components of a sample can be retained in a section, microchannel or reservoir of a disk of the invention by interaction with specific proteins, peptides, antibodies or fragments thereof derivatized to be retained within the surface of a component of the disk. Materials captured by such specific binding can be eluted from the surface of the disk and transferred to a collection reservoir by treatment with appropriately-chosen ionic strength buffers, using conventional methods developed for immunological or chromatographic techniques.

The invention also provides compartments defined by sections of a microchannel or by a chamber or reservoir wherein the inlet and outlet ports of the chamber are delimited by a filtering apparatus. In certain embodiments, the chamber thus defined contains a reagent such as a bead and particularly a bead coated with a compound such as an antibody having an affinity for a contaminant, unused reagent, reaction side-product or other compound unwanted in a final product. In the use of disks comprising such a filter-limited chamber, a fluid containing a mixture of wanted and unwanted compounds is moved through the filter chamber by centripetal force of the rotating disk. The unwanted compounds are thus bound by the affinity material, and the desired compounds flushed free of the chamber by fluid flow motivated by centripetal force. Alternatively, the desired compound may be retained in such a filter-limited chamber, and the unwanted compounds flushed away. In these embodiments, egress from the chamber, for example by the opening of a valve, is provided.

3. Mixers

A variety of mixing elements are advantageously included in embodiments of the

invention and include, for example, mixing elements formed by the microchannel or fluid handling structures of the disk by applying a textured surface to the microchannels

or chambers composing the mixer. Two or more channels can be joined at a position on the disk and their components mixed together by hydrodynamic activity imparted upon them by the textured surface of the mixing channel or chamber and the action of centripetal force imparted by the rotating disk. Mixing can also be accomplished by rapidly changing the direction of rotation and by physically agitating the disk by systems external to the disk.

In other embodiments, flex plate-wave (FPW) devices (*see* White, 1991, U.S. Patent No. 5,006,749, *ibid.*) can be used to effect mixing of fluids on a disk of the invention. FPW devices utilize aluminum and piezoelectric zinc oxide transducers placed at either end of a very thin membrane. The transducers launch and detect acoustic plate waves that are propagated along the membrane. The stiffness and mass per unit area of the membrane determine the velocity of plate wave. When connected with an amplifier, the waves form a delay-line oscillation that is proportional to the acoustic wave velocity. Structures based on the FPW phenomena have been used to sense pressure, acceleration, organic chemical vapors, the adsorption of proteins, the density and viscosity of liquids as well as to mix liquids together. FPW devices can be integrated onto the disk or can be positioned in proximity to the disk to effect mixing of fluid components in particular reaction chambers on the disk.

4. Valving Mechanisms

Control of fluid movement and transfer on the disk typically includes the use of valving mechanisms (microvalves) to permit or prevent fluid movement between components. Examples of such microvalves include a piezo activator comprising a glass plate sandwiched between two silicon wafers, as described by Nakagawa *et al.* (1990, Proc. IEEE Workshop of Micro Electro Mechanical Systems, Napa Valley, CA pp. 89); a schematic diagram of such a valve is shown in Figure 6. In this embodiment, a lower wafer and glass plate can have one or two inlets and one outlet channel etched in them. An upper wafer can have a circular center platform and a concentric platform surrounding it. The base of piezoelectric stack can be placed onto the center platform and its top connected to the concentric platform by means of circular bridge. The center

from the center inlet port to the outlet with no applied voltage. With a voltage applied the piezo element presses down on the arch center causing the ends to lift, blocking the center inlet and allowing fluid to flow from the peripheral inlet. In other, two-way embodiments, fluid flows with no applied voltage and is restrained upon the application of voltage. In another embodiment of a two-way valve, fluid is restrained in the absence of an applied voltage and is allowed to flow upon application of a voltage. In any of these embodiments the piezo stack can be perpendicular to the plane of rotation, oblique to the plane of rotation, or held within the plane of rotation.

In another embodiment, fluid control is effected using a pneumatically-actuated microvalve wherein a fluid channel is etched in one layer of material that has a raised valve seat at the point of control (a schematic diagram of this type of valve is shown in Figure 7). Into another layer, a corresponding hole is drilled, preferably by a laser to achieve a hole with a sufficiently small diameter, thereby providing pneumatic access. Onto that second structure a layer of silicone rubber or other flexible material is spun-deposited. These structures are then bonded together. Fluid movement is interrupted by the application of air pressure which presses the flexible membrane down onto the raised valve seat. This type of valve has been described by Veider *et al.* (1995, Eurosensors IX, pp. 284-286, Stockholm, Sweden, June 25-29). Measurements made by Veider *et al.* have shown that a similar valve closes completely with the application of 30 KPa of pressure over the fluid inlet pressure. This value corresponds to 207 psig, and can be adjusted by changing the diameter of the pneumatic orifice and the thickness of the membrane layer. Pneumatic pressure is applied to the disk to activate such valves as shown schematically in Figure 8

Pneumatic actuation can also be embodied by a micromachined gas valve that utilizes a bimetallic actuator mechanism, as shown in Figure 9. The valve consists of a diaphragm actuator that mates to the valve body. The actuator can contain integral resistive elements that heat upon application of a voltage, causing a deflection in the diaphragm. This deflection causes a central structure in the actuator to impinge upon the valve opening, thus regulating the flow of fluid through the opening. These valves allow

Embodiments of pneumatically actuated membrane valves can include integration of both components on a single disk or can comprise two disks aligned so that the pneumatic outlets of one disk align with the second disk to impinge upon the pneumatic actuation orific of the other disk. In either embodiment a source of pneumatic pressure can be delivered to the disk *via* concentric rings of material such as a Teflon®. In this embodiment, a standing core and a revolving element are contiguous to the disk. Pneumatic pressure is delivered through the interior of the standing core and directed by channels to the outer edge of the standing core. Suitably placed channels are machined into the revolving element and impinge upon the channels in the standing core and direct the pneumatic pressure to the gas valves.

Another valve embodiment is a pressure-balanced microvalve, shown in Figure 10. This type of valve is constructed of three layers of material, comprising two layers of silicon separated by a thin layer of electrically-insulating oxide (*i.e.*, silicon dioxide). A glass layer is bonded onto the top of the valve and advantageously contains inlet and outlet ports. A center plunger fashioned in the middle silicon layer is deflected into a gap contained on the lower silicon layer by application of a voltage between the silicon layers. Alternatively, the plunger is deflected by providing a pneumatic pressure drop into a gap in the lower layer. Irreversible jamming of micromachined parts may be prevented by the application of a thin layer of Cr/Pt to the glass structure. As an electrostatically driven device, this type of valve has many advantages, including that it may be wired directly in the fabrication of the disk. In this embodiment the actuator is a finely tuned device that requires minimal input energy in order to open the valve even at relatively high pressures. These types of valves have been disclosed by Huff *et al.* (1994, 7th International Conference on Solid-State Sensors and Actuators, pp. 98-101).

Another type of single-use valve, termed a polymeric relaxation valve, compatible with the disk and fluidic devices in general, is disclosed herein and shown in Figure 11. This valve is based on the relaxation of non-equilibrium polymeric structures. This phenomenon is described in detail in the following text.

1. A valve comprising a disk and a fluidic device, the disk and fluidic device being formed from a single piece of material.

structure equilibrates. A common example of this phenomenon is contraction of polyolefin (used in heat shrink tubing or wrap), the polyolefin structure of which is stable at room temperature. Upon heating to 135°C, however, the structure contracts. Examples of PR valve polymers include but are not limited to polyolefins, polystyrenes, polyurethanes, poly(vinyl chloride) and certain fluoropolymers.

One way to manufacture a PR valve is to place a polymer sheet or laminate over a channel requiring the valve (as shown in Figure 11). A cylindrical valve is then cold-stamped in such a way as to block the microchannel. The valve is actuated by the application of localized heat, for example, by a laser or by contact with a resistive heating element. The valve then contracts and fluid flow is enabled.

A further type of microvalve useful in the disks of the invention is a single use valve, illustrated herein by a capillary microvalve (disclosed in U.S. Provisional Application Serial No. 60/00x,xxx, filed August x, 1996 and incorporated by reference herein). This type of microvalve is based on the use of rotationally-induced fluid pressure to overcome capillary forces. Fluids which completely or partially wet the material of the microchannels (or reservoirs, reaction chambers, detection chambers, etc.) which contain them experience a resistance to flow when moving from a microchannel of narrow cross-section to one of larger cross-section, while those fluids which do not wet these materials resist flowing from microchannels (or reservoirs, reaction chambers, detection chambers, etc.) of large cross-section to those with smaller cross-section. This capillary pressure varies inversely with the sizes of the two microchannels (or reservoirs, reaction chambers, detection chambers, etc., or combinations thereof), the surface tension of the fluid, and the contact angle of the fluid on the material of the microchannels (or reservoirs, reaction chambers, detection chambers, etc.). Generally, the details of the cross-sectional shape are not important, but the dependence on cross-sectional dimension results in microchannels of dimension less than 500 μ m exhibit significant capillary pressure. By varying the intersection shapes, materials and cross-sectional areas of the components of the microsystems platform of the invention, "valve" are fashioned that require the application of a

square of the rotational frequency, with the radial position and with the extent of the

fluid in the radial direction). By varying capillary valve cross-sectional dimensions as well as the position and extent along the radial direction of the fluid handling components of the microsystem platforms of the invention, capillary valves are formed to release fluid flow in a rotation-dependent manner, using rotation rates of from 100rpm
5 to several thousand rpm. This arrangement allows complex, multistep fluid processes to be carried out using a pre-determined, monotonic increase in rotational rate

Control of the microvalves of the disks provided by the invention is achieved either using on-disk controller elements, device-specific controllers, or a combination thereof.

10

6. Control Systems

Integrated electronic processing systems (generally termed "controllers" herein) that include microprocessors and I/O devices can be fabricated directly onto the disk, can be fabricated separately and assembled into or onto the disk, or can be placed completely
15 off the disk, most advantageously as a component of the micromanipulation device. The controllers can be used to control the rotation drive motor (both speed, duration and direction), system temperature, optics, data acquisition, analysis and storage, and to monitor the state of systems integral to the disk. Examples of rotational controllers are those using rotation sensors adjacent to the motor itself for determining rotation rate, and
20 motor controller chips (e.g., Motorola MC33035) for driving direction and speed of such motors. Such sensors and chips are generally used in a closed-loop configuration, using the sensor data to control rotation of the disk to a rotational set-point. Similarly, the rotational data from these sensors can be converted from a digital train of pulses into an analog voltage using frequency-to-voltage conversion chips (e.g., Texan Instruments
25 Model LM2917). In this case, the analog signal then provides feedback to control an analog voltage set-point corresponding to the desired rotation rate. Controllers may also use the data encoded in the disk's data-carrying surface in a manner similar to that used in commercially-available compact disk (CD) players. In these embodiments, the digital data read by the laser is used to control rotation rate through a phase-locked loop. The

... controllers can also include communication components that allow access

to external databases and modems for remote data transfer. Specifically, controllers can be integrated into optical read systems in order to retrieve information contained on the disk, and to write information generated by the analytic systems on the disk to optical data storage sections integral to the disk. In these embodiments it will be understood that both read and write functions are performed on the surface of the disk opposite to the surface comprising the microsystems components disclosed herein.

Information (i.e., both instructions and data, collectively termed "informatics") pertaining to the control of any particular microanalytic system on the disk can be stored on the disk itself or externally, most advantageously by the microprocessor and/or memory of the disk device of the invention, or in a computer connected to the device. The information is used by the controller to control the timing and open/closed state of microvalves on the disk, to determine optimal disk rotational velocity, to control heating and cooling elements on the disk, to monitor detection systems, to integrate data generated by the disk and to implement logic structures based on the data collected.

7. Power Supply

The electrical requirements of systems contained on a disk can be delivered to the disk through brushes that impinge upon connections integral to the disk. Alternatively, an electrical connection can be made through the contact point between the microplatform and the rotational spindle or hub connecting the disk to the rotational motivating means. A battery can be integrated into the disk to provide an on-board electrical supply. Batteries can also be used to power the device used to manipulate the disk. Batteries used with the invention can be rechargeable such as a cadmium or lithium ion cell, or conventional lead-acid or alkaline cell.

Power delivered to the disk can be AC or DC. While electrical requirements are determined by the particular assay system embodied on the disk, voltage can range from microvolts through megavolts, more preferably millivolts through kilovolts. Current can range from microamps to amperes. Electrical supply can be for component operation or can be used to control and direct on-disk electronics.

8. Detectors and Sensors

Detection systems for use on the microsystem platforms of the invention include spectroscopic, electrochemical, physical, light scattering, radioactive, and mass spectroscopic detectors. Spectroscopic methods using these detectors encompass
5 electronic spectroscopy (ultraviolet and visible light absorbance, luminescence, and refractive index), vibrational spectroscopy (IR and Raman), and x-ray spectroscopies (x-ray fluorescence and conventional x-ray analysis using micromachined field emitters, such as those developed by the NASA Jet Propulsion Lab, Pasadena, CA).

General classes of detection and representative examples of each for use with the
10 microsystem platforms of the invention are described below. The classes are based on sensor type (light-based and electrochemical). In addition, the detection implementation systems utilizing the detectors of the invention can be external to the platform, adjacent to it or integral to the disk platform.

15 a. Spectroscopic Methods:

1. Fluorescence

Fluorescence detector systems developed for macroscopic uses are known in the prior art and are adapted for use with the microsystem platforms of this invention. Figure 12A and 12B illustrate two representative fluorescence configurations. In Figure
20 12A, an excitation source such as a laser is focused on an optically-transparent section of the disk. Light from any analytically-useful portion of the electromagnetic spectrum can be coupled with a disk material that is specifically transparent to light of a particular wavelength, permitting spectral properties of the light to be determined by the product or reagent occupying the reservoir interrogated by illumination with light. Alternatively,
25 the selection of light at a particular wavelength can be paired with a material having geometries and refractive index properties resulting in total internal reflection of the illuminating light. This enables either detection of material on the surface of the disk through evanescent light propagation, or multiple reflections through the sample itself, which increases the path length considerably.

FIG. 12A is a schematic diagram of a fluorescence detection system using a disk platform.

FIG. 12B is a schematic diagram of a fluorescence detection system using a disk platform.

embodiments, the optical component preceding the detector can include a dispersive element to permit spectral resolution. Fluorescence excitation can also be increased through multiple reflections from surfaces in the device whenever noise does not scale with path length in the same way as with signal.

Another type of fluorescence detection configuration is shown in Figure 12B. Light of both the fluorescence excitation wavelength and the emitted light wavelength are guided through one face of the device. An angle of 90 degrees is used to separate the excitation and collection optical trains. It is also possible to use other angles, including 0 degrees, whereby the excitation and emitted light travels colinearly. As long as the source light can be distinguished from the fluorescence signal, any optical geometry can be used. Optical windows suitable for spectroscopic measurement and transparent to the wavelengths used are included at appropriate positions (*i.e.*, in "read" reservoir embodiments of detecting chambers) on the disk. The use of this type of fluorescence in macroscopic systems has been disclosed by Haab *et al.* (1995, *Anal. Chem.* 67: 3253-3260).

2. Absorbance Detection

Absorbance measurements can be used to detect any analyte that changes the intensity of transmitted light by specifically absorbing energy (direct absorbance) or by changing the absorbance of another component in the system (indirect absorbance). Optical path geometry is designed to ensure that the absorbance detector is focused on a light path receiving the maximum amount of transmitted light from the illuminated sample. Both the light source and the detector can be positioned external to the disk, adjacent to the disk and moved in synchrony with it, or integral to the disk itself. The sample chamber on the disk can constitute a cuvette that is illuminated and transmitted light detected in a single pass or in multiple passes, particularly when used with a stroboscopic light signal that illuminates the detection chamber at a frequency equal to the frequency of rotation or multiples thereof. Alternatively, the sample chamber can be a planar waveguide, wherein the analyte interacts on the face of the waveguide and

the chamber surface; see Dessy, 1989, *Anal. Chem.* 61: 2191).

Indirect absorbance can be used with the same optical design. For indirect absorbance measurements, the analyte does not absorb the source light; instead, a drop in absorbance of a secondary material is measured as the analyte displaces it in the sample chamber. Increased transmittance therefore corresponds to analyte concentration.

3. Vibrational spectroscopy

Vibration spectroscopic detection means are also provided to generate data from a detecting chamber or "read" section of a microplatform of the invention. Infrared (IR) optical design is analogous to the design parameters disclosed above with regard to absorbance spectroscopy in the UV and visible range of the electromagnetic spectrum, with the components optimized instead for infrared frequencies. For such optimization, all materials in the optical path must transmit IR light. Configuration of the optical components to provide Raman light scattering information are similar to those disclosed in Figures 12A and 12B above for fluorescent measurements. However, due to the illumination time needed to generate sufficient signal, the rotation rate of the disk must be slowed, or in some instances, stopped. Depending on the use, static IR or Raman scattering analysis is most advantageously performed off-line in a separate IR or Raman instrument adapted for analysis of the disks of the invention.

4. Light scattering

Turbidity can also be measured on the disk. Optics are configured as with absorbance measurements. In this analysis, the intensity of the transmitted light is related to the concentration of the light-scattered particles in a sample. An example of an application of this type of detection method is a particle agglutination assay. Larger particles sediment in a rotating disk more rapidly than smaller particles, and the turbidity of a solution in the sample chamber before and after spinning the disk can be related to the size of the particles in the chamber. If small particles are induced to aggregate only

when treated with an assay reagent, resulting in aggregation of the particles in

the presence of the analyte as antibody from more than one particle bind to the analyte. When the disk is spun after this interaction occurs, sample chambers containing analyte will be less turbid than sample chambers not containing analyte. This system can be calibrated with standard amounts of analyte to provide a gauge of analyte concentration related to the turbidity of the sample under a set of standardized conditions.

Other types of light scattering detection methods are provided for use with the microsystems platforms and devices of the invention. Monochromatic light from a light source, advantageously a laser light source, is directed across the cross-sectional area of a flow channel on the disk. Light scattered by particles in a sample, such as cells, is collected at several angles over the illuminated portion of the channel (see Rosenzweig *et al.*, 1994, *Anal. Chem.* 66: 1771-1776). Data reduction is optimally programmed directly into the device based on standards such as appropriately-sized beads to relate the signal into interpretable results. Using a calibrated set of such beads, fine discrimination between particles of different sizes can be obtained. Another application for this system is flow cytometry, cell counting, cell sorting and cellular biological analysis and testing, including chemotherapeutic sensitivity and toxicology.

b. Electrochemical Detection Methods

Electrochemical detection requires contact between the sensor element and the sample, or between sensor elements and a material such as a gas in equilibrium with the sample. In the case of direct contact between sample and detector, the electrode system is built directly onto the disk, attached to the disk before rotation or moved into contact with the disk after it has stopped rotating. Detectors constructed using a gas vapor to encode information about the sample can be made with the detector external to the disk provided the gas vapor is configured to contact both the sample chamber and the detector. Electrochemical detectors interfaced with the disk include potentiometric, voltammetric and amperimetric devices, and can include any electrochemical transducer compatible with the materials used to construct the microsystem disk.

FIG. 10. Diagram of Microsystem

Diagram illustrating the configuration of a microsystem for electrochemical detection, showing a sample chamber, a detector, and a microsystem disk.

provides a means for characterizing interfacial properties of solutions passed over differently activated flow channels in the instrument. In view of the temperature-controlled nature of the microplatforms of the invention, streaming potentials can also be measured on this device (*see Reijenga et al.*, 1983, *J. Chromatogr.* **260**: 241). To
5 produce streaming potentials, the voltage potential difference between two platinum leads in contact with a solution at the inner and outer portions of the disk is measured in comparison with a reference electrode. As fluid flows under controlled centripetal motion through the channel, a streaming potential develops in response to fluid interactions with the disk surfaces in a moving field.

10 Alternatively, a platinum electrode is used to generate electroluminescent ions (*see Blackburn et al.*, **32**: 1534-9). Chemiluminescence is then detected using one of the optical detectors described above, depending on the wavelength of the chemiluminescent signal. Voltametric components are also useful in microsynthetic platforms of the invention to produce reactive intermediates or products.

2. Electrochemical Sensors

Electrochemical sensors are also advantageously incorporated into the disk. In one embodiment, an electrochemical detector is provided that uses a redox cycling reaction (*see Aoki et al.*, *Rev. Polarogr.* **36**: 67). This embodiment utilizes an
20 interdigitated microarray electrode within a micromachined chamber containing a species of interest. The potential of one electrode is set at the oxidized potential of the species of interest and the potential of the other electrode is set at the reduction potential of the species of interest. This is accomplished using a dual channel potentiostat, allowing the oxidized and reduced (*i.e.*, redox) chemical state of the sample to be
25 determined, or the chamber may be preset for a particular species. A volume of fluid containing a substance of interest is directed to the chamber. The electrochemically reversible species is then oxidized and reduced by cyclically energizing the electrodes. In this embodiment a molecule is detected by an apparent increase in the redox current. Since non-reversible species do not contribute signal after the first cycle, their overall

3. In another embodiment a dual channel electrochemical detector is provided.

comprising up to 16 lines of an electrode fabricated in a chamber by photolithography with dimensions resulting in each line being 100 μ m wide with 50 μ m between lines. (see Aoki *et al.*, 1992, *Anal. Chem.* 64: 2206). In this embodiment, a volume of fluid containing a substance of interest is directed to the chamber. Within the chamber each electrode is set a different potential so that 16 separate channels of electrochemical measurement may be made. Additionally, each electrode potential can be swept stepwise by a function generator. This protocol yields information pertaining to redox potential as well as redox current of the substances. This type of analysis also allows identification of molecules *via* voltammogram.

10

c. Physical Methods

Physical detection methods are also provided for use with the disks of the invention. For example, the disk can be used as a viscometer. Microchannels containing fluid to be tested advantageously contain a bead inserted on the disk. The motion of the bead through the fluid is analyzed and converted into viscosity data based on standards developed and stored in microprocessor memory. (see Linliu *et al.*, 1994, *Rev.Sci. Instrum.* 65: 3824-28).

15

Another embodiment is a capacitive pressure sensor (see Esashi *et al.*, 1992, *Proc. Micro Electro Mechanical Systems* 11: 43). In this embodiment, silicon and glass substrates are anodically bonded with hermetically sealed reference cavities. Pressure may be detected by the capacitance change between the silicon diaphragm and an aluminum electrode formed on the glass. A capacitance-to-frequency converter output of a CMOS circuit can be integrated on the silicon substrate or contained in controlling electronics off the disk.

20

By judicious placement of pressure sensors, the pressure due to centrifugation can be determined at any position on the disk. In conjunction with the microchannel diameter information and the pattern of orientation of the channels on the disk, pressure data can be used to determine flow rates at a particular rotational speed. This information can then be used by the microprocessor to adjust disk rotational speed to

25

microsystems platforms of the invention. These devices can be placed above the disk to detect head-space gases, or incorporated in the fluid channel on the instrument. When placed in the fluid system, the SAW is used to detect density changes in the solution, indicative of changing buffer, reagent or reactant composition (*see Ballantine et al.*, 1989, *Anal. Chem.* 61: 1989).

Volatile gases on the disk or trapped in the head-space surrounding the disk can be monitored in several ways. For example, a Clark electrode positioned in contact with either the solution or the gases above the disk may be used to detect oxygen content. (*Collison et al.*, 1990, *Anal. Chem.* 62: 1990).

d. Radioactive Detection Components

Microsystems platforms of the invention also can incorporate radioactivity detectors. Radioactive decay of an analyte or synthetic product on a disk of the invention can be detected using a CCD chip or similar single channel photodiode detector capable of integrating signal over time. Alternatively, radioactivity can be determined directly by placing a solid state detector in contact with a radioactive analyte. (*see Lamture et al.*, 1994, *Nucleic Acids Res.* 22: 2121-2125).

Modular structures

Analytic systems provided as components of the platforms of the invention typically consist of combinations of controllers, detectors, buffer and reagent reservoirs, chambers, microchannels, microvalves, heaters, filters, mixers, sensors, and other components. Components that constitute an analytic system on the disk can be composed of one or more of the following: complete integral systems fabricated entirely on the disk; complete integral systems fabricated as a component and assembled into or onto the disk; a subset of components fabricated directly onto the disk and interfaced with a subset of components that are fabricated as a component and assembled into or onto the disk; components that interface with the disk externally through a

Methods and Uses

Because of its flexibility, the invention offers a myriad of possible applications and embodiments. Certain features will be common to most embodiments, however. These features include sample collection; sample application to disk, incorporating tests
5 of adequacy at the time of sample application; a variety of specific assays performed on the disk; data collection, processing and analysis; data transmission and storage, either to memory, to a section of the disk, or to a remote station using communications software; data output to the user (including printing and screen display); and sample disk disposal (including, if necessary, disk sterilization).

10 Sample or analyte is collected using means appropriate for the particular sample. Blood, for example, is collected in vacuum tubes in a hospital or laboratory setting, and using a lancet for home or consumer use. Urine can be collected into a sterile container and applied to the disk using conventional liquid-transfer technology. Saliva is preferably applied to the disk diluted with a small volume of a solution of distilled water,
15 mild detergent and sugar flavoring. This solution can be provided as a mouthwash/gargle for detecting antigens, biological secretions and microorganisms. Alternatively, a small sack made of a fishnet polymer material containing the detergent formulation and a chewable resin can be chewed by a user to promote salivation, and then removed from the mouth and saliva recovered and applied conventionally.
20 Amniotic fluid and cerebrospinal fluid are, of necessity, collected using accepted medical techniques by qualified personnel.

Environmental and industrial samples are collected from ground water or factory effluent into containers produced to avoid leaching contaminants in the sample. Soil samples are collected and mixed with a solvent designed to dissolve the analyte of
25 interest. Industrial applications, such as pyrogen screening, are accomplished using specially-designed sample ports

Sample or analyte is loaded onto the disk by the user. Sample is optimally loaded onto the disk at a position proximal to the center of rotation, thereby permitting the greatest amount of centripetal force to be applied to the sample, and providing the

Multiple samples can be applied to the disk using a multiple loading device as shown in Figures 13A through 13C. In this embodiment of a multiple loading device, a multiplicity of pipette barrels are equally spaced and arranged radially. The pipettes are spaced to provide that the tips of the pipettes fit into access ports on the surface of the disk. The tips can be simple pins that hold a characteristic volume of sample by virtue of a combination of surface properties and fluid characteristics. Alternatively, the tips can be conventional hollow tubes, such as capillary or plastic conical tips, and the fluid manipulated manually in response to positive or negative pressure, as with a manual or automatic pipetting device. The loader can be operated manually or by robotic systems. The barrels can also be arrayed in a flexible arrangement, permitting the tips to address a linear array in one configuration and a radial array in another. In each embodiment, the loader comprises an alignment device to ensure reproducible placement of the loading tips on the disks of the invention.

Loaders are designed specifically for the substances being investigated. Examples include medical uses (where the samples include blood, body fluids including amniotic fluid, cerebrospinal, pleural, pericardial, peritoneal, seminal and synovial fluid, in addition to blood, sweat, saliva, urine and tears, and tissue samples, and excreta), and environmental and industrial substances (including atmospheric gases, water and aqueous solutions, industrial chemicals, and soils). Loading devices are also advantageously compatible with standard blood-handling equipment, such as vacuum tubes fitted with septa, and access sample therein by piercing the septa. Loading devices are also compatible with seat collection devices and means, such as lancets, for obtaining a small blood sample. A disk may also have integral lancets and rubber seals in order to sample blood directly.

Dynamic as well as static loading of the disk is envisioned as being within the scope of the invention (see Burtis *et al.*, 1974, *Clin. Chem.* 20: 932-941).

As the invention comprises the combination of a microsystems platform as described above and a micromanipulation device for manipulating this platform to impart centripetal force on fluids on the platform to effect movement, arrangement of

may be contained within the disk or on disk surface. Some on-disk devices have been described above in detail; additionally, the disk may contain electronic circuitry, including microprocessors for coordination of disk functions, and devices for communication with the disk manipulation device or other devices. The disk optimally
5 comprises detectors and sensors, or components of these devices and energy sources for various detection schemes (such as electric power supplies for electrochemical systems, electromagnetic radiation sources for spectroscopic systems), or materials, such as optically-transparent materials, that facilitate operation of and data generation using such detectors and sensors; actuators, including mechanical, electrical, and electromagnetic
10 devices for controlling fluid movement on the disk, including valves, channels, and other fluid compartments; communications and data handling devices, mediating communications between the disk and the player/reader device, using electromagnetic (laser, infra-red, radiofrequency, microwave), electrical, or other means; circuitry designed for controlling procedures and processes on the disk, including systems
15 diagnostics, assays protocols and analysis of assay data. These are provided in the form of ASICs or ROM which are programmed only at the point-of-manufacture; FPGA's EPROM, flash memory (UV-erasable EPROM), or programmable IC arrays, or similar arrays programmable by the user through the platform manipulation device or other device. Also included in the components of the invention are CPU and microprocessor
20 units and associated RAM operating with an assembler language or high-level language programmable through disk communications, and components for mediating communication with other devices, including facsimile/modem communications with remote display or data analysis systems.

Off-disk devices comprise the microplatform micromanipulating device itself
25 and other devices which can access information, write information, or initiate processes on the disk. Figure 15 illustrates the categories of devices and sub-devices which are part of the micromanipulation device, and indicates how these components interact. "Interaction" is used herein to mean the exchange of "data" between the disk and device, or among the components of the device itself. The relationship between these

control, overall system control, data read/write devices, external detectors and actuators for use with the disk, dedicated data and assay processors for processing encoded data and assay data, a central processor unit, a user interface, and means for communicating to the disk, the user, and other devices. Mechanical drive and associated circuits include
5 devices to control and monitor precisely the rotation rate and angular position of the disk, and devices to select and mount multiple-disks from a cassette, turntable, or other multiple-disk storage unit. System control units provide overall device control, either pre-programmed or accessible to the user-interface. Disk data read/write devices are provided for reading encoded information from a disk or other medium. Optimally,
10 write-to-disk capabilities are included, permitting a section of the disk to contain analytical data generated from assays performed on the disk. This option is not advantageous in uses of the disk where the disks are contaminated with biological or other hazards, absent means (such as sterilization) for neutralizing the hazard. The device can also include external actuators comprising optical magneto-optic, magnetic
15 and electrical components to actuate microvalves and initiate processes on the disk, as well as external detectors and sensors or components of detectors and sensors that operate in concert with other components on the disk, including analytic and diagnostic devices. Certain of these aspects of the disk micromanipulating device are illustrated in Figures 14A through 14F.

20 Disk data processors are also advantageously incorporated into the devices of the invention which enable processing and manipulation of encoded disk data. These components include software used by the micromanipulator CPU, programmable circuits (such as FPGAs, PLAs) and dedicated chipsets (such as ASICs). Also provided are assay processors for processing data arising from events and assays performed on the
25 disk and detected by external detectors or communicated from on-disk components. The device also advantageously comprises a central processing unit or computer which will allow processing of disk data and assay results data-analysis (through pre-programming); additionally, conventional computer capabilities (word-processing, graphics production, etc.) can be provided

devices, and printers, plotters, and graphics devices are provided as components of the microplatform micromanipulating devices of the invention. Communication and telecommunications are provided through standard hard-wired interfaces (such as RS-232, IEEE-488M SCSI bus), infra-red and optical communications, short-or long-range telecommunications ("cellular" telecommunications radio-frequency), and internal or external modem for manual or automated telephone communications.

Disk information comprises both software written to the disk to facilitate operation of the microsystem assays constructed thereupon, and assay data generated during use of the microsystem by the user. Disk information includes material written to the disk (as optically encoded data) and information inherent to the disk (e.g., the current status of a valve, which can be accessed through magnetic pickup or through the reflective properties of the coating material at the valve-position). Data written to the disk may include but is not limited to the audio/video/test and machine format information (e.g., binary, binhex, assembler language). This data includes system control data used for initiation of control programs to spin the disk, or perform assays, information on disk configuration, disk identity, uses, analysis protocols and programming, protocols descriptions, diagnostic programs and test results, point-of-use information, analysis results data, and background information. Acquired data information can be stored as analog or digital and can be raw data, processed data or a combination of both.

System control data include synchronization data to enable the micromanipulation device to function at the correct angular velocity/velocities and accelerations and data relating to physical parameters of disk. Disk configuration and compatibility data include data regarding the type of disk (configuration of on-disk devices, valves, and reagent, reaction and detection chambers) used to determine the applicability of desired testing protocols; this data provides a functional identity of the type of disk and capabilities of the disk. It can be also form part of an interactive feedback system for checking microsystem platform components prior to initiation of an assay on the disk. Disk identify and serial numbers are provided encoded on each

by the user. Also included in disk data is a history of procedures performed with the disk by the user. Also included in the disk data is a history of procedures performed with the disk, typically written for both machine recognition (*i.e.*, how many and which assays remain unused or ready for use), as well as information written by the user.

5 Figures 30-32 display the action of software encoded on the disk used for controlling the device driving the disk. Figure 30 displays the process flow. The control program, encoded as data on the disk, is read through conventional means, for example, by the laser of an optical storage medium (such as a compact disc or "Laservision" disc) and decoded in the conventional way for loading into the random access memory (RAM)
10 of the micromanipulation device. This program is then executed. In some applications, execution of the program to completion will be automatic and without active interaction with the user. In other applications the user will be presented with a variety of options (typically, as a menu) for running the program. As an example, user choices, such as whether to run an exhaustive or limited set of diagnostics, test procedures, analyses, or
15 other disk functions, or to determine the extent of detail and the method of reporting test results are provided through the user interfaces.

 Figures 31 and 32 show one specific set of programmed steps for performing assays using the capillary microvalves disclosed above; other arrangements of steps within the program will be apparent to one of ordinary skill and readily integrated, for
20 example, for sending signals to activate microvalves and other actuators. The program disclosed here consists of blocks in which different rotation rates are set for varying amounts of time, allowing for capillary valving, mixing, and incubation; mixing program blocks, which (for example) put the spindle motor through an oscillatory acceleration and deceleration, are possible but not shown. These program blocks consist
25 of outputting commands to various electronic devices (motor, detectors, etc.) and reading data from devices, yielding a measure of device and process status. Provisions are shown in the program for halting the program if the status is "bad" (such as motor cannot reach appropriate speed, door to device cannot close, no power detected in light source for spectroscopic measurements.). This condition can lead to a program halt (as

30 the program is not shown.

and data output blocks. The particular acquisition process here involves using an encoded signal on the disk—for example, an optical signal associated with a detection chamber passing the detector—to gate acquisition of data. In this way, data is acquired for a specific time when detection chambers are in proximity to the detector. It is also possible to continuously take data and use features in that data—for example, the shape of the signal as a function of time, which might look like a square wave for an array of windows on an otherwise opaque disk—to determine what parts of the data are useful for analysis. Data analysis could include non-linear least-squares fitting, linear regression of data as function of time, or end-point analysis (data at an end-point time for a reaction), as well as other methods. Data output may be in the form of “yes/no” answers to the user interface, numeric data, and storage to internal or external storage media.

All component parts of this program need not be contained on the disk. For example, the program can be resident in the computer and designed to read the disk itself to obtain the rotation velocity profiles necessary for using the disk. All other aspects of the program—such as when and how to read and analyze data—can be part of a dedicated program or read from other media.

Analysis/test protocol data are descriptions of tests and analyses which can be performed with a disk. These data can be as simple as a title given the disk, or can contain a detailed description of disk use, data analysis and handling, including test protocols and data analysis protocols. Analysis/test protocol programming is provided that can be used as systems-specified subroutines in more general software schemes, or can be fed into programmable logic so that the device can perform the desired analyses. Analysis/protocol descriptions are provided, as audio, video, text or other descriptions of analytic processes performed on disk, including background information, conditions for valid use, precautions, and other aspects.

Encryption and verification data/programming is provided to ensure the security of the programming and data generated in the analyses performed by the disk. Encryption/de-encryption routines are used to restrict access to data contained on the

test results on detector function, status of reagent chambers, valves, heating elements, and other components, stored in disk-memory or written to the disk by a separate device used at the time of diagnostics.

5 Point-of-use information is encoded on the disk at its point-of-use (sample loading, e.g.) in the form of video, audio, or text images, including, for example location, time and personnel. Also included in point of use information is test result data, recorded by the disk itself or by a disk player/reader at the time these procedures were performed.

10 Certain data are inherent to the disk and are accessible through the micromanipulation device. These include sample adequacy test data, which records the presence or absence of samples or reagents at appropriate reservoirs and other fluid handling regions of the disk, and can be accessed through external detectors and sensors. Valve status is also recorded, including the record of the change in valve status during a procedure performed in the disk. Valve status is determined, for example, by using
15 magnetic pickups in the device applied to magnetic valve mechanisms; status can also be visible through optical windows on the disk. The presence of radioactive, chemical or biological contaminants on the external surface of the disk can be recorded upon detection by sensors comprising the device, optimally resulting in a warning message delivered to a user interface such as a display or print-out.

20 Disk data and information are stored using a variety of media, including both the recording medium of the disk material (i.e., reflective properties of an optically-read disk, most preferably a read/write CD-ROM) and by the device itself using electronic components. Information is encoded using conventional or modified technologies used for computer information storage. Video, audio, and text information is digitized using
25 methods developed by the digital video, audio, and computer industries. Analog signals arising from test procedures, such as a signal observed in a photodiode detector or photomultiplier tube, are converted through analog-to-digital conversion regimes or may be supplied in raw or amplified form through external jacks for processing off-disk or off-device. Various embodiments of the disk manipulation device of the invention

purposes. Disk data storage media include optical media, utilizing reflecting/non-reflecting flats and pits on a surface, using technology adapted from audio CD, CD-ROM, and "Laserdisc" technology, and barcodes. Magneto-optic and magnetic media are also within the scope of this aspect of the invention, using conventional computer magnetic storage media. Electronic data storage means are also provided, using the status of internal arrays of electronic components (FPGAs, PLAs, EPROM, ROM, ASICs, IC networks) for information handling. Chemical recording means, including simple chromatographic staining of a detector section or chamber of the device, is also disclosed to provide a simple visual record of a test result. This simple chemical recording means provides an avenue to at-home diagnostic without the need for an expensive device more sophisticated in capabilities than required to determine an assay amenable to simply the presence or absence of chemical markers.

Software and Communications

Software providing the information and instruction set for microsystem performance, quality control, data acquisition, handling and processing, and communications is included within the scope of this invention. For the purposes of this invention, such software is referred to as "machine language instructions." Control and analysis software is advantageously provided in high-level languages such as C/C++, Visual Basic, FORTRAN or Pascal. Drivers are provided for interface boards (either internal to the device or to a host computer interfaced with the device) which translates instructions on the host computer's bus into micromanipulator commands. Additionally, drivers for experiment-control software such as LabView may be created, again using conventional, industry-standard interface protocols. These applications are most preferably capable of being run on a number of popular computer platforms, including UNIX/Linux, X-windows, Macintosh, SGI, etc. Control and analysis can also be performed using dedicated chipsets and circuitry, ROM, and EPROM. For example, test validity can be insured (at least in part) through the use of ROM-based test procedures, in which all programming is performed at the point-of-manufacture without possibility

applications (such as Excel, Clarisworks, SigmaPlot, Oracle, Sybase, etc.).

Because some applications of the disk technology disclosed herein involve important questions related to human health, disk diagnostic software must be able to analyze diagnostics of the disk, its contents (samples, reagents, devices), the player, and analysis software to ensure result validity. Types of information used by this diagnostic software include sample adequacy and flow, verification of disk format and software/test procedure compatibility, on-and off-disk software tests, quality control monitoring of disk manufacture (for example, channel placement and alignment), viability, positioning and functionality of on-disk and off-disk sensors and detectors, diagnostics of player communications and microprocessor, microprocessor/CPU, power stability, etc.

Diagnostics of mechanical and electronic components are performed in ways familiar to those proficient in the art. Software self-diagnostics are achieved using checklist/verification of software routines and subroutines to detect incompatibility with system hardware (from either the micromanipulation device or the disk) or with other components of system software.

Sample-related disk diagnostics include assays of flow, sample adequacy, and reagent adequacy, type and quality for the assay to be performed. Device-related disk diagnostics include checks of detector/sensor function, electronic components self-test, valve control, and thermal control tests. Software diagnostics provide self-testing of software components encoded in the disk or in the device, corruption safeguards, read-only and read-write tests. Disk format is also checked using disk diagnostics, ensuring that the disk format and assay type are properly read and are in agreement with the protocol held in the device memory.

On-disk software includes read-only software, available as ROM, specifically CD-ROM, for diagnostics, assay control and data analysis. Read-only software is designed for specific procedures and processes which cannot be altered and insure proper usage of the disk and fail-safe against corruption by the user. Software may also be embodied within the encoding medium (optical, magnetic, etc.) or an alternate medium (such as barcodes). Re-programmable software (such as FPGAs, PLAs,

provided on-device. In either case, a user-interface through keyboard, touchpad and/or display components of the device is provided.

Applications software is provided in read-only or re-programmable software formats. Included in this component of the fluidics micromanipulation apparatus of the invention is software that can be read from standard computer data storage medium. Examples include medical or analytic diagnostic programs reliant on integrated databases which are contained within disk or device memory, or that can be accessed from networked workstations, or access on-line services, such as a newsletter and news services, and software for the production and analysis of images, including pattern recognition, statistical analysis software, etc.

Integration of control and applications software can be made through the use of either a unique operating system developed for the disk and micromanipulator of the invention, or by adaptation of existing OS. Optimally, the OS uses authoring software to combine text, graphics, video and audio into an easy to use, "point and click" system. Such as OS could also provide an object-oriented environment or facsimile thereof (e.g., LabView-based systems) for customizing programming by sophisticated users, as well as providing for the development of additional software by the disk reader/player manufacturer or independent software developers.

The OS can also be chosen to allow design of disks and disk-based assays. Mechanical design, including simulation of rotational dynamics and stability and fluid flow simulation are advantageously encompassed in a disk design software package.

Communications aspects of the invention include hardware and software embodiments relating to data input and output from a user or to remote control and analysis sites. Hard-wired communications features include high-speed data-, video- or image-transmission and communication through local busses (e.g., a VGA bus for video signals) and conventional hard-wired interfaces (e.g., RS-232, IEEE-488, SCSI bus), Ethernet connections, Appletalk, and various local area networks (LANs). Telecommunications devices include cellular transceivers for short-range communications, radio-frequency and micro-wave transceivers for long-range

for input of analog signals from other instruments, and optical and infra-red communications ports are also provided for communications with peripheral instruments.

5 **Configurations of the Micromanipulation Apparatus for Certain Applications**

The micromanipulation device includes various combinations of hardware and software as described above. Figure 15 is an illustration of the general combination of communication, device, detection, and control instrumentation in a device. Certain applications may not have certain features, for example, portable units may not have graphical user interfaces. The micromanipulation device can be a "stand-alone" device, 10 or a peripheral instrument to a larger assemblage of devices including, for example, computers, printers, and image-processing equipment, or a host for peripheral elements such as control pads, data entry/read-out units (such as Newton-type devices or equivalent), or an integrated system. The device in all embodiments comprises hardware to rotate the disk at both steady and variable rates and systems for monitoring rotation 15 rate. The device can also include devices to initiate sample and disk diagnostics, perform "external" tests and detection as described herein, initiate sample and disk diagnostics, perform "external" tests and detection as described herein, initiate analyses on-disk through specific actuators such as valves, read disk-inherent information and information encoded in the disk or other data/information storage media information, 20 and in some applications write information to the disk.

Additional elements in the device, including system control, data processors, array of assay processors, external detectors, external actuators, assay out and data out lines, communications, and software, are device-and/or application-specific.

25 For example, in a "point-of-use" portable or home-use application, sample loading is followed by initiation of the player's program. System control can be provided by front-panel controls and indicators which can access a variety of programs stored in the disk or the device. These "hard-wired" programs utilize controller circuitry to read or read/write operations from or to disk or memory and/or perform tests and

same procedure using a single disk. Device actuation is optimally obtained with the pressing of a single button. These processor(s) and data processors(s) of this type of device comprise circuitry and chipware designed to process analysis data (assay processor) and encoded data (data processor). Information from these processors can be available for output to the user on a front-panel or video display and can also be used internally to ensure correct operating conditions for the assay. This internal information processing can include the results of systems diagnostic tests to insure disk identity and test type compatibility; the presence of reagent and sample as determined through light absorption through a detector port scanning reagent and sample reservoirs; the presence of contamination detected before testing begins, and the results of self-diagnostics on external detectors and actuators. These results are used by the system controller to determine whether the requested test can be performed.

After loading and activation, analysis results can be stored internally in electronic memory or encoded upon the disk. The results of these analyses and procedures are then routed to the front-panel display (flat-panel LCD, etc.) using appropriate video drivers. Processed assay data can also be routed to one of many standard digital I/O systems including RS-232, RS-232C, IEEE-488, and other systems familiar from digital I/O and interface. Similarly, encoded disk data can be routed to the audio/visual display. Raw analog signals can also be switched to one or more external jacks for off-device storage or processing.

An embodiment of the least technically sophisticated device is a portable unit no larger than a portable audio CD player consisting of disk-drive, controllers and selectors for programmable or pre-programmed angular acceleration/deceleration profiles for a limited number of procedures. Such a device is advantageous for on-site toxic-chemical/contamination testing. Analyte to be tested is introduced to the disk, which is inserted into the player and the appropriate program chosen. Analysis results are stored on the disk, to be later read-out by a larger player/reader unit, and/or displayed immediately to the user. Results can also be stored as the inherent state of an indicator (positive/negative status of litmus paper in different cuvettes, for example), with no

Information about the location, time, and other conditions of sample collection are entered through the user interface.

Another embodiment is a stand-alone device with active communications capabilities and greater functionality. An exemplary application for such a device is as a home blood-assay unit. This device is used by an individual placing a drop of blood on the disk, inserting the disk, and initiating the assay, preferably simply by pressing a single button. One or more analytical procedures are then performed. Assay data is transferred to software which performs the requisite analysis, either on-disk or within the device. The device can also be permanently or temporarily attached to the home-telephone line and automatically transmit either raw or reduced data to a computer at the central location is used to analyze the data transmitted, compare the data with accepted standards and/or previous data from the same patient, make a permanent record as part of a patient's device a confirmation of receipt of the data, perhaps the data analysis, and advice or suggested/recommended course of action (such as contacting the physician).

A desk-top peripheral/host application station constitutes a device as described above with the ability to accept instructions from and respond to a host computer over one of many possible data-protocols. The system is capable of acting as host or can transmit data to peripherals or other networked devices and workstations. Remote accessing of pre-programmed functions, function re-programming, and real-time control capabilities are also provided.

Yet another embodiment of this application is a centralized or bedside player/reader device with associated software located as a nurses' station in a hospital. As tests are performed on disks, the information is relayed to a physician by telephone, facsimile or pager via short-range transceiver. Patient identity can be entered at the time of sample collection by the use of bar codes and light pens attached to the device, providing the advantage of positive patient/sample identification.

The device can also be provided having the above-capabilities and functionality's and in addition having an interface with an integrated computer having high-resolution graphics, image-processing and other features. The computer provides control of the

integrated system is provided with extensive analysis software and background data-bases and information. Disk-storage cassettes of carousals are also an advantageous feature of such system. An integrated system of this type is useful in a large, analytical laboratory setting.

5 A self-contained system is useful for applications in isolated environments. Examples include devices used in remote or hostile setting, such as air, water and soil testing devices used in the Arctic for environmental purposes, or for use on the battlefield for toxic chemical detection.

10 The microsystem platforms provided by the invention are also useful for preparing samples for other analytical instruments, such as mass-spectrometers, gas chromatographs, high pressure liquid chromatographs, liquid chromatographs, capillary electrophoresis, inductively-coupled plasma spectroscopy, and X-ray absorption fine-structure. In some application, the final product is removed from the disk to be analyzed.

15 Samples can be pre-concentrated and purified on the device by incorporating aqueous two-phase separation systems. This can be done, for example, by mixing two phases which separate from each other based on thermodynamic differences like polyethylene glycol (PEG) and dextrans, biopolymers are usefully separated using this method. Alternatively, environmental tests such as colorimetric analysis can be enhanced by incorporating cloud-point separations to concentrate and enhance optical
20 signals. In addition, small scale counter-current chromatography can be performed on the device (*see*, Foucault, 1991, *Anal. Chem.* 63: PAGE). Centripetal force on the disk can be used to force different density fluids to flow against each other, resulting in separation of components along a density gradient to develop the chromatogram.

25 Applications and Uses

The microsystem platforms and micromanipulating devices that make up the fluidics micromanipulation apparatus of the invention have a wide variety of microsynthetic and microanalytic applications, due to the flexibility of the design,
30 wherein fluids are motivated on the platform by surface tension.

applications encompasses within the scope of the instant invention that is neither exhaustive or intended to be limiting of all of the embodiments of this invention.

The invention is advantageously used for microanalysis in research, especially biological research applications. Such microanalyses include immunoassay, *in vitro* amplification routines, including polymerase chain reaction, ligase chain reaction and magnetic chain reaction. Molecular and microbiological assays, including restriction enzyme digestion of DNA and DNA fragment size separation/fractionation can also be accomplished using the microsystem disks of the invention. Microsynthetic manipulations, such as DNA fragment ligation, replacement synthesis, radiolabeling and fluorescent or antigenic labeling can also be performed using the disks of the invention. Nucleic acid sequencing, using a variety of synthetic protocols using enzymatic replacement synthesis of DNA, can be performed, and resolution and analysis of the resulting nested set of single-stranded DNA fragments can be separated on the disk, identified and arranged into a sequence using resident software modified from such software currently available for macroscopic, automated DNA sequencing machines. Other applications include pH measurement, filtration and ultrafiltration, chromatography, including affinity chromatography and reverse-phase chromatography, electrophoresis, microbiological applications including microculture and identification of pathogens, flow cytometry, immunoassay and other heretofore conventional laboratory procedures performed at a macroscopic scale.

An illustrative example is immunoassay. While there exist a multiplicity of experimental methodologies for detecting antigen/antibody interactions that are in research and clinical use at the present time, the most robust immunoassay protocols involve "sandwich"-type assays. In such assays, an immobilized antibody is presented to a sample to be tested for the antigenic analyte specific for the immobilized antibody. A second antibody, specific for a different epitope of the same antigen is subsequently bound, making a "sandwich" of the antigen between the two bound antibodies. In such assays, the second antibody is linked to a detectable moiety, such as a radiolabel or fluorescent label, or a enzymatic or catalytic functionality. For example, horseradish

sandwich.

An example of a disk adapted for performing such an immunoassay is shown in Figure 17Q. In this embodiment, the secondary antibody is linked to alkaline phosphate (AP). The presence and amount of AP activity is determined by monitoring the conversion of one of the following exemplary substrates by the enzyme colorimetrically:
5 B-naphthyl phosphate converts to an insoluble azo dye in the presence of a diazonium salt; 5-bromo-4-chloro-3-indolyl phosphate is converted to 5,5'-dibromo-4-,4'-dichloro indigo in the presence of cupric sulfate; or 4-methylumbelliferyl phosphate is converted to 4-methylumbelliferone, which emits light at 450nm.

10 In one exemplary embodiment, the reaction chamber comprises an antibody specific for an antigen, where the antibody is immobilized by adsorption of the antibody to the reaction chamber. Contiguous with the reaction chamber is advantageously placed a reagent reservoir containing a second antibody, this antibody being linked to an enzyme such as alkaline phosphate. Sample, which may contain an antigen of interest that is
15 specifically recognized by the above antibodies, is loaded at an inlet port. The disk is spun to first introduce the sample into the reaction chamber containing immobilized antibody, followed by introduction of the second antibody into the reaction chamber after a time sufficient to saturate the immobilized antibody with antigen to the extent the antigen is present in the sample. Alternatively, the sample may be contacted with
20 the second antibody, allowed to interact, then introduced into the reaction chamber. Incubation of the sample with antibody is performed without spinning for about 1 minute. After each incubation, washing buffer from a buffer reservoir is spun into the reaction chamber in order to remove unbound antibody. For alkaline phosphatase assays, solutions of 2mg/mL o-dianisidine in water, 1mg/mL B-naphthyl phosphate in
25 50mM boric acid/50mM KCl (pH 9.2) buffer and 100 mM magnesium chloride are delivered to the reaction chamber in the appropriate amounts. The extent of enzyme-linked, secondary antibody binding is evaluated by detection of a purple precipitate using a photodiode or CCD camera.

A disk configured for immunoassay applications is shown in Figure 17R for

invention provides a means for identifying and quantitating the presence and number of particular cells or cell types in fluids, most preferably biological fluids such as blood, urine, amniotic fluid, semen and milk. In these embodiments of the invention, the microsystems platform comprises a chamber or solid surface on the disk that is prepared to selectively bind the particular cell or cell type. After attachment of the cells to the surface, non-specific binding cells and other components are removed by fluid flow (washing) or centrifugal force (comprising the inertial flow of fluid in response to the centripetal acceleration of the disk). The cells of interest that remain attached to the microplatform surface or chamber are the detected and quantified using means including but not limited to microscopic, spectroscopic, fluorescent, chemiluminescent, or light-scattering means. The invention also provides such cells attached to a specific surface for toxicity monitoring, such as metabolic monitoring to determine the efficacy of bioactive drugs or other treatments. Ordered arrays of such surface are provided in certain embodiments to facilitate a complete determination of the purity and sterility of certain biological samples, and for cell cytometric and cytometry applications.

The surface or chamber of the disk for specific binding of the particular cells or cell types of interest is prepared to provide specific binding sites therefor. Typically, an antibody, preferably a monoclonal antibody, is attached to the surface or chamber, wherein the antibody is specific for a cell surface antigen expressed on the cell or cell type of interest. Alternatively, a ligand specific for a cell surface receptor expressed on the particular cell or cell type of interest is used to provide a specific attachment site. Arrays of specifically prepared surfaces or chambers are provided on certain embodiments of the disk. Surfaces and chamber are provided, for example, by contacting the surface with a solution of an appropriate antibody. In the practice of these preparation methods, contact of the surface with the antibody is followed by contacting the surface with a non-specific blocking protein, such as bovine serum albumin. Antibodies and blocking proteins can be contacted with the surface or chamber using a piezoelectrically driven point head (such as are used in ink-jet printing applications) can be advantageously used for this purpose. Alternatively, screen printing, or spraying the

additional alternatives, microlithographic and microstamping techniques can be used to prepare the surface or chamber.

In the practice of the invention, a biological or other fluid sample containing the particular cell or cell type of interest is applied to the prepared surface or chamber and
5 allowed in contact with the prepared surface or chamber for a time sufficient to allow specific binding of the cells or cell types to the surface. As contact with the surface may be inhibited by cell settling properties in the volume of the fluid, chambers and surfaces having minimized height transversely through the microsystem platform are preferred.

10 Non-specific cell binding is minimized or eliminated from the chamber or surface by washing the surface or chamber with a fluid amount sufficient to remove such non-specific binding. Washing is accomplished by simple bulk flow of fluid over the surface or chamber, or by centrifugation.

After washing, cells that remain attached to the surface or chamber are detected
15 and counted. In a preferred embodiment, detection and counting is achieved using fluorescence microscopy. In the practice of the invention, specific dyes can be used to provide a fluorescence signal for any live cells remaining of the disk. The dye can be added directly to the surface or chamber, for example using a membrane-permeant dye, such as acetoxymethyl ester dyes. Alternatively, specific antibodies can be linked to
20 such dyes. Dyes can be added to the biological fluid comprising the cells prior to introduction onto the microsystem platform, or such dyes can be contacted with the cells *in situ* on the disk. The presence of the cells is detected using a fluorescence detector comprising a light source, a source filter, a dichroic filter or mirror, an emission filter, and a detector such as a photomultiplier tube.

25 In another example, thin-layer chromatography is accomplished on a microplatform disk comprising 100 μm square cross-section channels radiating outward from the center of the disk. Each channel is filled with separation substrate, which typically contains a binder material (0.1-10%) such as starch, gypsum, polyacrylic acid salts and the like, to provide mechanical strength and stability. (The use of such

channels, including for example cellulose, polyamide, polyethylene powders, aluminum oxide, diatomeaceous earth, magnesium silicate, and silica gels. Such substrates can be modified for example with silanizing molecules, such as dimethyl-, ethyl-octa- and 3-aminopropyl-silanes. Preferentially the separation substrate contains sorbent-impregnated fiber glass or PFTE matrices.

Sample is loaded *via* a port located proximal to the center of rotation of the disk. Upon spinning the disk, a mobile phase is allowed to flow outward through the separation substrate, carrying sample components to the periphery of the disk at characteristic rates. The mobile phase can be chosen from a multiplicity of appropriate solvent systems, including hexane, methanol and dichloromethane. Choice of a particular solvent depends on the nature of the disk material, the separation substrate and the components of the sample to be separated. Similarly, the choice of visualization reagents used to detect separated sample components are specific for the substances separated. For example, ninhydrin is used to detect amino acids; alimony chloride is used plus potassium permanganate for hydrocarbons; sulfuric acid plus anisaldehyde for carbohydrates; and bromine for olefins. Image of separation channels after separation is achieved using a CCD camera. A disk configured for thin layer chromatography applications is shown in Figure 17R for illustration.

Medical applications using the microsystems of the invention are abundant and robust. Various embodiments of the invention provide for at-home, bedside, hospital and portable devices for rapid analysis of blood components, blood gases, drug concentrations, metabolites and infectious agents. In at-home monitoring embodiments, the invention provides a simple, easy-to-use consumer friendly device requiring a patient to add a blood droplet, urine sample or saliva sample to a specific application region on the disk, insert the disk in the device and start the device by pushing a button. In a hospital setting, both bedside and clinical laboratory embodiments are provided, wherein the bedside embodiment is advantageously linked electronically to a central processing unit located, for example, at a nurses station, and the clinical laboratory embodiment comprises a medical reference library for rapid, automated diagnostics of patient sample

immunoassay for metabolites, drugs, and other biological and other chemical species; vaccine efficacy monitoring; myeloma or lupus erythematosus monitoring; determination of blood glucose and/or ketone body levels in patients with diabetes; automated cholesterol testing; automated blood drug concentration determination; toxicology; monitoring of electrolytes of** other medically-relevant blood component
5 at a patient's bedside; sepsis/endotoxin monitoring; allergy testing; and thrombus monitoring.

The invention also provides analytical instruments for environmental testing, industrial applications and regulation compliance. Portable, preferably hand-held
10 embodiments, as well as more extensive embodiments, installed as part of an industrial quality control regime, are provided. Applications for these embodiments of the invention include analyte testing, particularly testing for industrial effluents and waste material, to be used for regulatory compliance; and quality control of industrial, most advantageously of human consumable items, particularly pharmaceuticals and
15 specifically endotoxin determinations. Application for testing, mixing and evaluating perfumes and other complex mixtures are also within the scope of the invention.

The invention also provides chemical reaction and synthesis modeling, wherein a reaction scheme or industrial production regime can be tested and evaluated in miniaturized simulations. The invention provides for cost-effective prototyping of
20 potential research, medical and industrial chemical reaction schemes, which can be scaled to macroscopic levels after analysis and optimization using the microsystems platforms of this invention.

A variety of other applications are provided, including microsynthetic methods and forensic applications.

25 The following Examples are intended to further illustrate certain preferred embodiments of the invention and are not limiting in nature.

EXAMPLE 1

**Fabrication of Microplatform Disks for Chemical Analysis, Synthesis
and Applications**

Microplatform disks of the invention are fabricated from thermoplastics such as
5 teflon, polyethylene, polypropylene, methylmethacrylates and polycarbonates, among
others, due to their ease of molding, stamping and milling. Alternatively, the disks can
be made of silica, glass, quartz or inert metal. A fluid handling system is built by
sequential application of one or more of these materials laid down in stepwise fashion
onto the thermoplastic substrate. Figures 17A through 17E are a schematic
10 representation of a disk adapted for performing DNA sequencing. Disks of the invention
are fabricated with an injection molded, optically-clear base* layer having optical pits
in the manner of a conventional compact disk (CD). The disk is a round, polycarbonate
disk 120mm in diameter and 100 μ m thick. The optical pits provide means for encoding
instrument control programming, user interface information, graphics and sound specific
15 to the application and driver configuration. The driver configuration depends on
whether the micromanipulation device is a hand-held, benchtop or floor model, and also
on the details of external communication and other specifics of the hardware
configuration. This layer is then overlaid with a reflective surface, with appropriate
windows for external detectors, specifically optical detectors, being left clear on the disk.
20 Other layers of polycarbonate of varying thickness are laid down on the disk in the form
of channels, reservoirs, reaction chambers and other structures, including provisions on
the disk for valves and other control elements. These layers can be pre-fabricated and
cut with the appropriate geometries for a given application and assembled on the disk.
Layers comprising materials other than polycarbonate can also be incorporated into the
25 disk. The composition of the layers on the disk depend in large part on the specific
application and the requirements of chemical compatibility with the reagents to be used
with the disk. Electrical layers can be incorporated in disks requiring electric circuits,
such as electrophoresis applications and electrically-controlled valves. Control devices,
such as valves, integrated circuits, laser diodes, photodiodes and resistive networks that
30 can form selective heating areas or flexible logic structures can be incorporated into
appropriately wired recesses, either by direct fabrication of modular installation onto the
disk. Reagents that can be stored dry can be introduced into appropriate open chambers
by spraying into reservoirs using means similar to inkjet printing heads, and then dried
on the disk. A top layer comprising access ports and air vents, ports or shafts is then

adapted for particular applications as described in the Figure legends.

EXAMPLE 2

Blood Composition Determination

5 Blood composition can be determined *via* hematocrit analysis using an analytic microplatform disk prepared as described in Example 1 held within a device comprising a microchannel layer with a number of microchannels as shown in Figure 18. The microchannel layer is 100pm thick and treated with heparin to prevent coagulation
10 during the assay. The blood sample to be analyzed is drawn by capillary action into a channel arranged perpendicular to the direction of rotation, as shown in Figure 18; a number of such channels may be arranged radially on the disk. When all samples to be tested have been drawn into the channels, the disk is spun at a speed of 8000 to 10,000 rpm to effect sedimentation of erythrocytes within the channel. Once centrifugation has
15 been performed for an appropriate time (3 to 5 minutes), the hematocrit of each sample is determined simultaneously by stroboscopic interrogation of each of the channels using a conventional CD laser system in the device described above. When the laser passes the boundary of erythrocytes, the change in light scattering pattern detected by the photodiode detector is converted into a hematocrit value based on a standardized set of
20 light scatter/hematocrit information stored in the internal processor and memory of the device. Alternatively, the raw information is relayed *via* a infrared port or hard-wired interface to a microprocessor for analysis. Such a central microprocessor is on site or in the alternative at a centralized location, such as a nursing station in a hospital or in a medical center connected to the hematocrit determining device by telephone or other
25 dedicated connection. Hematocrit can be determined by untrained individuals (including patients) by the simple application of a blood droplet produced by lancet onto the disk, followed by the simple application of the device and automated hematocrit analysis and data processing on site or transmission to a central location of trained medical personnel. This embodiment of the invention provides for chronic monitoring of patients having
30 hematopoietic proliferative disease (such as leukemia, lymphoma, myeloma, and anemias).

In addition, blood gas can be determined using the above device in combination with a disk having integrated electrodes embedded within the hematocrit channel, or having a separate channel devoted to blood gas determination on the hematocrit disk.

Alternatively, the device can be used to determine blood pH. The device can be modified to include a pH sensor (e.g., a pH sensitive MOSFET or a pH sensitive ISFET) as a pH monitor. Blood pH is determined with the use of a Si_3N_4 gate ISFET.

with a reference electrode consisting of a liquid junction and an Ag-AgCl wire electrode. Further examples of such analytical methods for determining blood gases, electrolyte concentration and other information advantageously performed using the hematocrit disk or alternate variations of this disk are described as modifications of the
5 macroscopic-scale methods of Shoji & Esashi (1992, *Sensors and Actuators B* 8: 205).

Blood analysis are also performed using split-flow thin cell (SPLITT) fractionation as described by Bor Fuh *et al.* (1995, *Biotechnol. Prog.* 11: 14-20). A schematic representation of a disk configured for SPLITT analysis is shown in Figure 19. This process can produce enriched fractions of proteins and lipoproteins, platelets,
10 erythrocytes, lymphocytes, monocytes, and neutrophils. A non-contiguous circular channel is etched into the disk incorporating a thin wall at either end (Figure 19), the inlet stream splitter. Sample and carrier streams are introduced at opposite sides of one end, and the chamber is spun in that direction. Within the spinning chamber two distinct
15 splitting planes are set up based on hydrodynamic forces, the inlet splitting stream (ISP) and the outlet splitting stream (OSP). The ISP is adjustable by regulating the ratio of the sample to the carrier streams. Depending on the method of sample input two distinct separation modes are possible, the equilibrium and transport modes.

In the equilibrium mode separation is based on the equilibrium of the components in relation to the applied centrifugal field. Separation is optimized by
20 adjusting the outlet flow ratio. The enriched fraction can then be collected from either side of the outlet stream splitter. In the transport mode the components are introduced as a thin lamina above the ISP. Based on the difference in sedimentation coefficients components with a higher transport rate are selectively directed to the opposite sides of the outlet valves at the orifices. Variable flow valves are described elsewhere in this
25 document. In another embodiment each SPLITT chamber may be dedicated to the separation type required of it, ISP or OSP, and the flow regulated by fixed flow-restriction orifices.

In order to fully fractionate blood into the above-identified fractions, five separations, each yielding two fractions, are performed. One embodiment of the
30 microsystems disk of the invention used for this type of fractionation is shown in Figure 19. Five concentric SPLITT cells are illustrated in this Figure, labeled C1, (close to the center of rotation) through C5 (toward the periphery). A blood sample is introduced into C1 and subjected to a transport mode separation by rotating the disk at the appropriate speed. Platelets and proteins (fraction 1) are fractionated toward the center of rotation

and erythrocytes and leukocytes (fraction 2) are fractionated toward the periphery.

50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2

in platelets toward the center of rotation and proteins toward the periphery. Fraction 1 results in platelets toward the center of rotation and proteins toward the periphery. Fraction 2 yields fractions 3 and 4, consisting of lymphocytes and monocytes toward the center of rotation and erythrocytes and neutrophils toward the center of rotation and monocytes toward the periphery. Fraction 4 yields neutrophils toward the center of rotation and erythrocytes toward the periphery. Thus, fractionation of blood into five isolated components is achieved.

The activity of enzymes in the protein fraction can be determined using immobilized enzymes (Heineman, 1993, *App. Biochem. Biotech.* 41: 87-97). For example, blood-specific enzymes (such as glucose oxidase, alkaline phosphatase, and lactate oxidase) can be immobilized in poly (vinyl alcohol (PVAL). Lactate oxidase is immobilized on platinized graphite electrodes by sandwiching a thin layer of enzyme between two layers of PVAL. The sensor responds to lactate by the electrochemical oxidation of hydrogen peroxide generated by the enzyme-catalyzed oxidation of lactate that diffuses into the network. The current produced is proportional to the concentration of peroxide, which in turn is proportional to the concentration of lactate. This sensor has been shown to be sensitive to lactate concentrations ranging from 1.7-26 uM.

Upon separation, each fraction is interrogated by detection systems to determine the relative components of the fractions. Alternatively, each fraction can be removed from the disk through an outlet port for further study off-device. For example, each fraction can be subjected to simple counting by passing the cells in a thin stream past two electrodes comprising a resistance monitor. As a cell passes through the electrodes a corresponding rise in resistance is monitored and counted. These data are then integrated relative to a standard set of particles distributed according to size to determine the relative number of each cell type in the original sample.

The fractions can be subjected to fluorescent antibody staining specific to each cell type. The cells are held in place by micromachined filters integral to the channels (U.S. Patent No. 5,304,487), stained and washed on the disk. The resulting labeled cells can then be quantified as a function of the degree of fluorescent staining associated with the cells.

EXAMPLE 3

DNA sizing and mutation detection

This example illustrates a method for DNA sizing and mutation detection using a microfluidic device and co-pending U.S. Serial No. 08/218,030, filed March 29, 1994 and incorporated

herein by reference in its entirety) is advantageously incorporated into the structure of the disk Example 1. The DNA meltometer technique takes advantage of the fact that the denaturing point of a DNA duplex is dependent upon the length, the base composition, and the degree of complimentary of the two strands in the duplex. A denaturing point may be determined in relation to some physical state of the molecule (such as temperature or the concentration of a denaturing chemical such as urea or formamide, and a set of standard conditions employed, the information derived from which can be stored in the microprocessor and/or memory of the device. In order to size any particular DNA duplex, one strand is immobilized on the disk by attaching it to a streptavidin coated bead. The bead is retained by a filter machined in to the channel (see U.S. Patent 5,304,487). Alternatively, the bead can be a paramagnetic bead retained in the channel by application of a magnetic field using a permanent magnet incorporated into the disk or positioned in proximity to the channel. An electromagnet can be used. The electromagnet can be incorporated directly into the disk and actuated by application of 0.8volt DC at 500mA. The other strand is labeled, typically using a fluorescent dye or a radioactive isotope. Alternatively, the distinct optical properties of the DNA molecule itself (i.e., hyperchromicity) are detected using unlabeled DNA molecules by monitoring absorbance at 260nm. Although this aspect of the method requires a more sophisticated device to generate and detect ultraviolet light, user preparation of the DNA is minimized and the cost of DNA preparation per sample greatly reduced. In the practice of the method of the invention, the immobilized, labeled duplex is placed on the disk and subjected to a flow stream of a buffered solution contained on the disk. During the development of the flow stream, the DNA is further subjected to a controlled denaturing gradient produced in the flow stream by the gradual addition of denaturant to the DNA. With an effective radius of 3.5" and a rotational speed of 600 rpm, a flow rate of 10uL/min can be generated in a channel 100um in diameter. Four buffer reservoirs each containing 300uL can be incorporated into each quadrant of the disk (800um deep extending from a position at a radius of 25mm to 50mm). At 10uL/min, this will allow a melting ramp of 30 min. Each duplex dissociates at a characteristic concentration of denaturant in the gradient, and can be identified in comparison with standards the denaturant profile information of which is stored in the microprocessor and/or memory of the device. Denaturation is detected by interrogation downstream of the melting chamber, using the appropriate detecting means (photooptical means for ultraviolet absorption or fluorescence detection, or radioisotope detectors (Geiger-Mueller

method) or end-labeled fragments determined by electrophoresis, or labeled polymerase chain reaction or magnetic chain reaction (the latter disclosed in U.S. Serial

Nos. 08/375,226, filed January 19, 1995, which is a file wrapper continuation of USSN 08/074,345, filed June 9, 1993 and 08/353,573, filed December 8, 1994, each incorporated by reference in its entirety). Amplification is carried out using one primer labeled with a detectable label such as a fluorescent dye or radioisotope, and the other primer is covalently attached to a molecule that permits immobilization of the primer (e.g., biotin). After amplification (either off-disk or on the disk as described in more detail in Example 4 below), the labeled, biotinylated duplex DNA product fragment is attached to a solid support coated with streptavidin, for example, by movement of the amplification reaction mixture into a channel or compartment on the disk wherein the walls are coated with streptavidin, or by movement of the amplification mixture into a compartment on the disk containing a binding matrix such as Dynal M-280 Dynabeads (polystyrene coated paramagnetic particles of 2.8 μ m in diameter). Standardized size markers are included in the post-amplification compartment in order to provide a reference set of DNA fragments for comparison with the amplification product fragments. In this analysis, a number of different duplex DNA molecules from either a multiplex amplification reaction or a number of separate amplification reactions may be sized simultaneously, each fragment or set of fragments being distinguished from others by use of reaction- or fragment-specific detectable labels, or differences in some other physical property of the fragments. For amplifications performed off-disk, beads attached to the fragment are loaded into a channel on the disk capable of retaining the beads (such as size exclusion, "optical tweezers" or by magnetic attraction). In the latter embodiment, the magnetic retention means (permanent magnets or electromagnets) are either integral to the disk, held on second disk spinning synchronously with the first, or placed on the device so as to immobilize the DNA fragments in the appropriate compartment.

DNA size analysis is also performed essentially as described above, whereby the retained particles are subjected to a thermal denaturing gradient. For a thermal gradient used to denature the bound DNA fragments, a Peltier heat pump, direct laser heating or a resistive element is used to increase the temperature of the binding compartment through the denaturation range by the gradual addition of thermal energy. As above, a flow rate of 10 μ L/min can be generated in a channel 100 μ m in diameter, allowing a melting ramp of 30 min. The compartment is also subjected to a flow stream as described above to elute the denatured, labeled stands from the binding/melting chamber. Downstream from the binding/melting chamber are appropriate means for

each DNA fragment determined by comparison to internal DNA size marker controls and DNA melting profiles and characteristics stored in the microprocessor and/or memory of the device.

DNA mutations are also detected by meltometer analysis. DNA fragments to be
5 tested (including amplification-derived fragments and restriction enzyme digestion or
cloned fragments) are prepared and hybridized with a bound standard (typically
wildtype) copy of the gene or gene fragment of interest. Hybridization is performed
either on-device or using conventional DNA hybridization methods (as described in
10 Hames & Higgins, Nucleic Acid Hybridization: A Practical Approach, Rickwood &
Hames, eds., IRL Press, Oxford, 1985). Elution of the hybridized fragments is
dependent on the degree of complimentary between the two species of DNA strands (*i.e.*,
wildtype and mutant). Hybridization analysis is performed using wildtype DNA that is
prepared wherein one strand is covalently attached to a molecule that permits its
15 immobilization. The non-covalently attached strand is then eluted by washing at a
temperature much greater than the T_m of the duplex (typically, the DNA is heated to >
90°C, or to lower temperatures in the presence of denaturants such as formamide).
Elution is monitored to determine the concentration of bound single-stranded product
available for further hybridization; typically, the amount of DNA eluted is monitored,
20 for example by ultraviolet light absorbance, and the bound DNA considered to be
completely single stranded when no more DNA can be eluted. The wildtype DNA is
prepared whereby only one of the strand making up the duplex is covalently attached to
the immobilizing molecule, in order to require detectable labeling of only one (the
complementary one) strand of the mutant DNA to be tested. Alternatively, either strand
25 may be covalently attached, requiring both mutant strands to be detectably labeled. An
advantage of double-labeling the mutant fragment even when only one wildtype strand
is covalently attached to the immobilizing molecule, is that denaturation and elution of
the non-complementary strand can be monitored during hybridization, and non-specific
binding/hybridization of the mutant to wildtype DNA strands can be detected.

After hybridization is accomplished, the degree of complementarity of the
30 strands is determined by a modification of the thermal or chemical denaturing protocols
described above. Analysis of the resulting pattern of duplex melting is performed by
comparison to a pattern of mismatched DNA duplex melting prepared either
simultaneously or prior to experimental analysis and stored in the device microprocessor
and/or memory using standard or expected single base or multiple mismatches. Such

mutations are also detected by the meltometer analysis. In this embodiment, the
test DNA is immobilized on the disk and subjected to hybridization/denaturation

analysis with a battery of precharacterized test probes. Using this method, DNA fragments are preferably prepared using *in vitro* amplification techniques, so that one strand is immobilizable due to covalent attachment of the binding molecule to one of the primers. Using this method, the DNA fragment to be tested is sequentially hybridized with and eluted by denaturation from a series of well-characterized DNA probes being detectably labeled. Alternatively (depending on the nature of the DNA mismatch expected for each probe), hybridization and denaturation are multiplexed, using probes detectably labeled with different detectable labels so that each probe can be identified. This method is useful for genetic screening as described above.

EXAMPLE 4

DNA Amplification and Analysis

Fragments of DNA are amplified *in vitro* by polymerase chain reaction (PCR) or magnetic chain reaction and analyzed by capillary electrophoresis. Reagent mixing, primer annealing, extension and denaturation in an amplification cycle resulting in amplification of a 500bp target fragment and its subsequent analysis are carried out using a device and disk as described in Example 1 above. A schematic diagram of the structure of the disk is shown in Figure 21.

The disk comprises at least three sample input ports A, B and C. Port A permits injection of 30 attomoles (about 100pg) linear bacteriophage lambda DNA. Port B and C allow input of 5 μ L of a 20 μ M solution of primer 1 and 2 respectively, having the sequence:

Primer 1: 5'-GATGAGTTCGTGTCCGTACAACTGG-3' (SEQ ID No.: 1) and

Primer 2: 5'-GGTTATCGAAATCAGCCACAGCGCC-3' (SEQ ID No.: 2).

The disk also comprises three reagent reservoirs D, E and F in the Figure and containing 54 μ L of distilled water; 10 μ L of a solution of 100mM Tris-HCl (pH 8.3), 500mM KCl, 15mM MgCl₂, 0.1% gelatin and 1.25 μ M of each dNTP; and 1 μ L of *Taq* DNA polymerase at a concentration of 5 Units/ μ L, respectively.

In addition, the disk comprises a reaction chamber G that is configured to facilitate mixing of these reagents using a flexural-plate-wave component (as described in U.S. Patent No. 5,006,749). Also included in the configuration of reaction chamber

cooling specific for the reaction chamber. Disks are also provided that comprise a multiplicity of sets of the reaction components A through G

Amplification is initiated by introducing sample DNA and primer into each set of ports A, B and C. When all samples and primers have been introduced into the ports, the disk is spun at a speed of 1 to 30,000 rpm to effect mixing of the reagents into reaction chambers G. Simultaneously, valves controlling reservoirs D, E and F are opened and the contents of these reservoirs are also forced into reaction chamber G. Mixing of sample DNAs, primers and reagents is facilitated by activation of the flexural-plate-wave component. DNA amplification takes place in the reaction chamber using the following thermocycling program. The reaction mixture is initially heated to 95°C for 3 minutes. The amplification cycle thereafter comprises the steps of: step 1, incubation at 95°C for 1 minute; step 2, cooling the chamber to 37°C for 1 minute; and step 3, heating the chamber to 72°C for 3 minutes. This amplification cycle is repeated for a total of 20 cycles, and the reaction completed by incubation at 72°C for 5 minutes.

Amplified DNA fragments are analyzed by transfer to capillary electrophoresis unit H by spinning the disk at a speed of 1 to 30,000rpm and opening a valve on reaction chamber G leading to capillary electrophoresis unit H, thereby effecting transfer of an amount of the reaction mixture to the electrophoresis unit. The amount of the reaction mixture, typically 10 μ L, is determined by a combination of the length of time the valve on reaction chamber G is open and the speed at which the disk is rotated. Capillary electrophoresis is accomplished as described below in Example 11, and fractionated DNA species detected using optical or other means as described above in Example 2. This method provides a unified amplification and analysis device advantageously used for performing PCR and other amplification reactions in a sample under conditions of limited sample

EXAMPLE 5

DNA Restriction and Digestion and Analysis

Restriction enzyme digestion and restriction fragment analysis is performed

capillary electrophoresis. Reagent mixing, DNA digestion and restriction fragment analysis are carried out on the disk. A schematic diagram of the structure of the disk is shown in Figure 22.

The disk comprises a sample input port A; three reagent reservoirs B, C and D; a reaction chamber E configured for mixing the reagents as described above in Example 5, and a capillary electrophoresis unit F. The reagent reservoirs contain: 1-2 μ L of a restriction enzyme, e.g. *HindIII*, at a concentration of 20 Units/ μ L in reservoir B; 4 μ L of a solution of 100mM Tris-HCl (pH 7.9), 100mM MgCl₂ and 10mM dithiothreitol in reservoir C; and 30 μ L of distilled water in reservoir D. Disks are also provided that comprise a multiplicity of sets of the reaction components A through E.

Restriction enzyme digestion of the DNA is initiated by placing 4-5 μ L of a solution (typically, 10mM Tris-HCl, 1mM EDTA, pH 8) containing 4 μ g bacteriophage lambda DNA in sample input port A. The DNA sample and the reagents in reservoirs B, C and D are transferred to reaction chamber E by spinning the disk at a rotational speed of 1 to 30,000 rpm and opening valves controlling reservoirs B, C and D. The reaction is incubated at 37°C for 1h in reaction chamber E after mixing, the reaction chamber being heated by provision of a Peltier heating element either on the disk or positioned in the device so as to specifically heat the reaction chamber. After digestion, an amount of the digested DNA is transferred to electrophoresis unit F by spinning the disk at a speed of 1 to 30,000 rpm and opening a valve on reaction chamber E leading to capillary electrophoresis unit F, thereby effecting transfer of an amount of the reaction mixture to the electrophoresis unit. The amount of the reaction mixture, typically 10 μ L, is determined by a combination of the length of time the valve on reaction chamber E is open and the speed at which the disk is rotated. Capillary electrophoresis is accomplished as described below in Example 11, and fractionated DNA species detected using optical or other means as described above in Example 2.

EXAMPLE 6

DNA Synthesis

controlled pore glass (CPG) through a series of reaction chambers containing reagents necessary for phosphoramidite DNA synthesis. Reagents and CPG are delivered sequentially to reaction chambers by single-use valves connecting the reaction chambers to each other and to reagent reservoirs. Each disk has a number of synthesis reaction chambers to produce oligonucleotides having a length similar to the length of oligonucleotides produced by commercially-available DNA synthesis instruments (*i.e.*, 100-150 bases). A schematic diagram of the structure of the disk is shown in Figure 23A.

A CPG bearing a first base of a sequence (thereby defining the 3' extent of the oligonucleotide) is loaded either by the user or by automated means into a sample input port A. The CPG is then transferred into a reaction chamber containing trichloroacetic acid (TCA) in acetonitrile (CH_3CN) by spinning the disk at a rotational speed of 1 to 30,000 rpm. Detritylation of the nucleotide is performed at room temperature for a defined time interval, typically 1 minute. The reagent is then decanted from the first reaction chamber by opening a valve with a bore too small to allow passage of the CPG but sufficient to drain the TCA-containing mixture into a decantation chamber. As the deprotection of the base by detritylation is known to produce a colored product (orange), the intensity of which is a measure of the extent of the reaction, optical means for determining the absorbance of this effluent are advantageously provided to be recorded on the device microprocessor/memory. After decanting the reaction mixture, the CPG are spun into a rinse chamber containing CH_3CN , the chamber optionally comprising a mixing means as described above. After rinsing, the CH_3CN is decanted into a effluent reservoir controlled by a size-selective valve as above, and the CPG spun into a second reaction chamber. Mixed with the CPG in the second reaction chamber is a solution containing one of four phosphoramidite bases (G, A, T, or C) corresponding to the next position in the oligonucleotide chain. The reaction mixture in the second reaction chamber is mixed and allowed to react for a defined time interval, typically three minutes. The reaction mixture is then decanted as above and the CPG spun into a rinse chamber containing CH_3CN and a base catalyst (e.g., 4 Å molecular sieves, 0.1M DBU).

FIGURE 23A: Schematic diagram of a disk with reaction chambers and decantation chambers.

mixture is incubated for a defined time interval, typically 1 minute. The reaction mixture is decanted to an effluent reservoir and the CPG spun into a rinse chamber containing CH_3CN . After rinsing, the CH_3CN is decanted to an effluent reservoir and the CPG spun into a fourth reaction chamber along with a two-component "capping" reagent. The capping reaction is performed for a defined time interval, typically 1 minute. After the reaction is complete, the reaction mixture is decanted to an effluent reservoir as above and the CPG spun into a rinse chamber containing CH_3CN . The CH_3CN is then decanted to an effluent reservoir and the CPG is spun into a fifth chamber containing TCA, comprising the beginning of another cycle. The cycle is repeated by transit of the CPG through interconnected series of the four reaction chamber until the preprogrammed sequence is completely synthesized. The CPG is then spun into a reaction chamber containing concentrated ammonium hydroxide and heated at 60°C for a defined time interval, typically 6 hours, during which time the DNA molecule is deprotected and cleaved from the CPG support. The finished oligonucleotide is removed by the user or by automated means.

The disk provides a series of reaction chambers linked to each other and comprising four reaction and rinsing chambers per nucleotide to be added to the oligonucleotide chain. The disks can be loaded to produce a particular oligonucleotide, or each reaction chamber 2 can be in contact with reagent reservoirs containing each of the four nucleotide bases and linked to the reaction chamber by an individually-controllable valve. In this embodiment, activation of the appropriate valve at each step in the cycle is controlled by a signal from the device. Disks comprising a multiplicity of these synthetic arrays. Permitting simultaneous synthesis of a plurality of oligonucleotides, are also provided. A schematic diagram of a disk configured for multiple oligonucleotide synthesis is shown in Figure 23B.

DNA synthesis can also be performed upon preloaded CPG contained in reaction chambers toward the periphery of the disk and reagents delivered by the use of multiuse two-way valves, as schematically diagramed in Figure 23A. In these disks, reaction chambers capable of containing 100nL, spaced 150.µm on-center (measured from the

[illegible]

SUNG, CHUN-YU, JAMES C. SUTHERLAND, and JAMES C. MURPHY. 1993. *Journal of Great Lakes Research* 19:1-12.

phosphoramidites, CH_3CN , TCA, oxidizer and capping reagents. Trityl-bearing CPG or linkers bound directly to the reaction chambers are similarly preloaded onto the disk. Microliter volumes of reagents are sufficient for each reaction. TCA is spun into each first reaction chamber and allowed to react for a defined length of time, typically one minute, then spun to a effluent (waste) chamber on the periphery of the disk. The CH_3CN rinse is spun into each reaction chamber and then to waste. By selective valve actuation, the A, C, G, or T phosphoramidite is spun to the reaction chambers requiring that base and reacted for a defined time interval, typically three minutes, and the spun to waste. A CH_3CN rinse is spun to each reaction chamber and after, to the waste chamber. The oxidizer mixture is spun into each reaction chamber, reacted for a defined time interval, typically one minute, then to waste. Another CH_3CN rinse is spun to each reaction chamber and then to waste. The two-component capping reagent is spun to each reaction chamber and reacted for a defined time interval, typically one minute, then to waste. For each cycle, the final CH_3CN rinse is then spun to each reaction chamber and then to the waste chamber. The cycle is repeated for a preprogrammed number of cycles until each oligonucleotide is completely synthesized. Concentrated ammonium hydroxide is then spun to each of the reaction chambers and reacted for a defined length of time, typically 6 hours, and reacted at 60°C to deprotect and cleave the completed DNA from its support. The DNA can then be removed by manual or automated means. Conversely, the linkage of the oligonucleotide to the CPG support is chosen to be resistant to the action of ammonium hydroxide, so that the deprotected oligonucleotide remains in the reaction chambers bound to CPG.

Peptide synthesis disks are also provided, whereby the arrangement of reagent reservoirs and reaction chambers as described above is adapted for the synthetic reactions comprising a peptide synthesis regime.

EXAMPLE 7

Enzymatic DNA Sequencing

The nucleotide sequence of a DNA fragment is determined by the Sanger

method using a DNA polymerase, a primer, and four deoxynucleoside triphosphates (dNTPs).

This document is a preliminary document and should not be used for any purpose other than to inform the public of the existence of the invention.

port. The DNA is then transferred into a mixing chamber containing terminator solution (i.e., a solution comprising a dideoxy form of nucleotides G, A, T or C) by spinning the disk at a rotational speed of 1 to 30,000 rpm. Terminator solution typically comprises 100nL of a solution containing 5 picomoles of each deoxynucleotide, 0.5 picomoles of one dideoxynucleotide covalently linked to a fluorescent label, 90mM Tris-HCl-(pH 7.5), 45mM MgCl₂ and 110mM NaCl. The contents of the mixing chamber are transferred into a reaction chamber containing 0.1 units of T7 DNA polymerase (or, alternatively, 0.1 Units of *Taq* polymerase) and 20nL 0.1M dithiothreitol (DTT) by spinning the disk at a rotational speed of 1 to 30,000 rpm, yielding a reaction mixture in the reaction chamber having a final concentration of buffer components that is 26mM Tris- HCl (pH 7.5), 13mM MgCl₂, 32mM NaCl, and 6mM DTT. The reaction chamber is heated to 37°C (or, alternatively, to 65°C for *Taq* polymerase) by a resistive heating element integral to the disk, or alternatively, positioned within the device to specifically heat the reaction chamber, and incubated for a defined length of time, typically 1 minute. The reaction products are spun into an equal volume of 90% formamide/EDTA, heated to 90°C for 1 minute and spun to a capillary electrophoresis unit on the disk. The set of dideoxynucleotide-terminated DNA fragments comprising the reaction mixture is then separated by capillary electrophoresis and the sequence of fragments determined by laser-induced fluorescence detection as described above. Disks comprising a multiplicity of these synthetic arrays, permitting simultaneous synthesis of a plurality of dideoxynucleotide-terminated oligonucleotides, are also provided. The deduced nucleotide sequence is determined from the pattern of fluorescence signals detected and the sequence is determined from the pattern of fluorescence signals detected and the sequence derived by the device microprocessor from these data.

EXAMPLE 8

Liquid phase synthesis and analysis

A variety of colorimetric chemical analyses are performed using a disk as described in Example 1. For example, a disk is provided (see Figure 25) for performing a solution assay to determine iron concentration in a test solution (such as an industrial

10% sodium citrate buffer (pH 4), and 50uL 0.02%, 1,10-phenanthroline. The reagent reservoirs are arranged as shown in figure 25 so that these reagents are added to a reaction chamber sequentially by opening valves controlling flow from each reagent reservoir. Reagent transfer to the reaction chamber is achieved by spinning the disk of
5 Example 1 at a rotational speed of 1 to 30,000 rpm, whereby the centripetal force motivates each reagent solution from its reservoir to the reaction chamber. As shown in Figure 25, sample is introduced through the sample port (A) and centripetally delivered to the reaction chamber. The valve to the reagent reservoir containing HCl (B) is opened and acid is added to the sample. The sample is incubated 10 minutes to
10 dissolve all iron oxide present. Hydroxylamine hydrochloride (reservoir D) and citrate (reservoir E) are next added to the reaction mixture. The reaction mixture is incubated 20 minutes to ensure complete reduction of iron III to iron II. Next, 1,10-phenanthroline is transferred from reservoir F to complex the iron II and form a colored product. The solution is incubated 30 minutes at 30°C to complete color development. Photometric
15 measurement at 520 nm is done after the incubation process in a "read" cell (G) connected to the reaction chamber through valve G.

EXAMPLE 9

Solid phase (surface/colloid) synthesis/analysis

20 Oligonucleotides, single-stranded DNA or duplex DNA is covalently linked to a reactive particle (such as a bead or magnetic particle or a chromatographic substrate) using a disk prepared as described in Example 1 and shown in Figure 26. In the illustrate embodiment, a 25 uL aliquot of carboxy-activated magnetic particles (BioMag 4125, PerSeptive Diagnostics, Framingham, MA) is added to the disk through a sample
25 introduction port. The particles are exchanged from the initial solution into 50 uL 0.1 M imidazole (pH 6) by decanting the original solution through a valve to an effluent or waste reservoir, whereby the valve is configured to prevent loss of the magnetic particles from the reaction chamber. The imidazole solution is then added to the particle reaction chamber from an imidazole reservoir on the disk, transfer of imidazole being controlled
30 by a valve. The motive force for both decanting the original magnetic particle solution

with reference to Figure 25, as the disk spins the dense magnetic particles are pelleted

in a funnel at the end of the reaction chamber and deposited to waste. A valve controlling an imidazole reagent chamber containing 50 uL of 0.1M imidazole is then opened above the particles but below the decanting level and used to transfer the particles through a valve in the reaction chamber and into the next decanting reservoir.

5 This decanting process can be repeated many times to affect a change in the liquid phase to the desired composition. Typically, three exchanges are sufficient. Alternatively, appropriate configuration of the reagent and reaction chambers allows the magnetic particles to be exchanged within a single reaction chamber by controlled addition and removal of imidazole from clusters of reagent reservoirs, or alternatively, a single
10 reagent reservoir large enough to contain sufficient imidazole for the entire cycle of exchange.

After the exchange cycle is complete, the magnetic particles are transferred to a next reaction chamber containing 250 ug dry 1-ethyl-3(3-dimethylaminopropyl) carbodiimide (EDAC). A reagent reservoir containing 170 OD (170ng) 5'-aminated
15 DNA oligonucleotide in 50 uL of 0.1 M imidazole solution chamber prior to addition of the particles in order to dissolve the EDAC. The particles are then added through a valve in about 100 uL 0.1 M imidazole. Upon addition of the magnetic particles to the reaction chamber, the device is stopped and incubated 6 hours at 40°C. Heating can be effected by a heat source (such as Peltier heating device) embedded in the disk itself, or
20 positioned in the instrument in a configuration permitting specific heating of the reaction chamber. In the latter alternative, the disk may be stopped at a predetermined position relative to the device to ensure specificity of heating of the reaction chamber.

After incubation, the particles are washed and exchanged into 100 uL portions of water by decanting as described above as the disk is spun. Three exchanges are
25 typically performed to purify the particles. Product is advantageously collected in the extremity of the disk where it can easily be accessed for subsequent use. Disks comprising a multiplicity of these synthetic arrays, permitting simultaneous synthesis of a plurality of particle-linked oligonucleotides, are also provided.

Reaction Extraction Process

A disk as described in Example 1 (see Figure 2) for performing reactions

extraction of a solute from a solution or of a component of a mixture as an alternative to HPLC or other conventional biochemical separation methodology. Specifically, a channel on the disk is coated with a compound (such as octanol) by standard procedures to provide a surface having an affinity for a component of a mixture, typically a complex chemical or biochemical mixture. With a silicon disk, for example, the surface of the channel is activated by filling the chamber with aqueous epoxysilane at 95° C for 1 hour. The disk is washed about five times with distilled water to remove unreacted silane, and aminooctane is added in an solvent and incubated at 95° C for 1 hour followed by solvent rinse to remove unreacted octane.

Sample mixture containing the component to be eluted is added to an injection port and moved through the coated separation channel by rotating the disk at 1 to 30,000 rpm. Reagent reservoirs are opened at the entrance of the channel and used to elute the sample retained on the coated channel to a collection reservoir. The isolated sample component is then collected at an outlet port.

EXAMPLE 11

Free Zone Capillary Electrophoresis

Free zone capillary electrophoresis is performed on a disk fabricated as described in Example 1 above, and schematically represented in Figure 28. Specifically, a 5 μ m x 75 μ m x 25mm capillary (it will be recognized that all dimensions are approximate within limits of precision in fabricating components such as capillaries in the disk), is lithographically etched onto a glass disk. Electrical connections are made using standard methods by plating platinum onto the non-etched surface of the glass before sealing the top to the device. The separation channel is intersected by a 15 mm sample introduction channel, positioned 3 mm away from a buffer reservoir. The intersecting channel has a sample inlet port at one end and electrical connections at either end to control sample application to the capillary.

In the practice of capillary electrophoresis on the disk, the separation channel is filled from the buffer reservoir by rotation of the disk and the sample is

introduced into the separation channel by application of a voltage between the intersecting analyte inlet and analyte outlet channels on the chip (see Figure 28). A 50 V potential

drop is applied between the sample inlet and outlet ports while the separation channel ports float. The sample, comprising a solution of 5mM EDTA, 1mM Tris-HCl (pH 8) with 1 mM Mg^{2+} and 1 mM Ca^{2+} (typically prepared from the chloride salt). The running buffer consists of 10 mM Tris-HCl (pH 8), 5 mM EDTA. Separation toward the cathode is then performed by floating the electric potential at the sample reservoir and applying 250 V along the separation channel. Separation is monitored at a position 2 cm from the inlet port by monitoring, e.g. UV absorbance at 254 nm using a UV light source (mercury lamp) and a photodiode detector, positioned on the device to interest the capillary channel.

EXAMPLE 12

DNA electrophoresis

Gel electrophoresis is performed on a disk prepared as described in Example 1 above. For this application, a gel media is prepared in the separation channel, however, such gel media must be protected from sheer forces that develop with rotation of the disk during transfer of sample or buffer to the electrophoresis channel. Thus, the gel-filled capillary is advantageously arrayed concentrically on the disk, as shown schematically in Figure 29. As a result, the gel will only experience shear forces from centripetal-induced pressure during rotation if a fluid reservoir is in contact with the capillary during rotation of the disk. At rest, the planar geometry of the disk prevents hydrodynamic pressure on the capillary. This is an advantage over standard capillary electrophoresis systems, where hydrodynamic pressure is not so easily controlled because the buffer volumes are reservoir heights need to be carefully adjusted before each run to avoid hydrodynamic flow. This is also an advantage of capillary electrophoresis performed on the disks of the invention over electrophoresis performed on microchips, where buffer reservoirs are positioned above the plane of the separation channel and are thereby susceptible to hydrodynamic pressure-driven fluid flow.

Gel electrophoresis is performed on the disks of the invention to separate DNA fragments, including duplex PCR fragments, oligonucleotides and single-stranded

gel concentrically arrayed in a microetched separation channel.

polyacrylamide gel is prepared from an unpolymerized solution of 7M urea, 45mM Tris-borate buffer (pH 8.3), 1mM EDTA, 9% acrylamide, 0.1% TEMED and 10% ammonium persulfate. The disk can be prepared in the separation channel by mixing the components (wherein it will be recognized that unpolymerized polymerized
5 polyacrylamide is susceptible to light-catalyzed polymerization upon storage) particularly by introducing TEMED and ammonium persulfate to the mixture. Sufficient gel mixture is added to the separation channel by opening a valve from a mixing chamber to the separation channel and rotating the disk at 1 to 30,000 rpm. The disk is stopped upon filling of the separation channel to permit gel polymerization. Shortly
10 before polymerization is complete, the exit channel is flushed to eliminate bubbles and unpolymerized monomer by flushing the channel with buffer from a large buffer reservoir at the outlet side of the channel, controlled by a valve. A similar process is conducted on the inlet side of the gel.

To introduce a DNA sample, a valve is opened from an inlet port holding a
15 solution of DNA fragments, or alternatively, the sample is pipetted directly onto the disk. The sample is applied to the separation channel by spinning the disk at 1 to 30,000 rpm, forcing sample and buffer into the buffer filled channel above the gel. Upon introduction of the sample to the separation channel and the sample inlet channel. Sample concentrates at the gel/buffer interface before entering the separation matrix.
20 analogous to sample concentration during conventional slab gel electrophoresis. Electrophoresis is performed at 250 V/cm to effect a separation of DNA fragments, the cathode (positive electrode) being positioned at the outlet end of the channel distal to the sample inlet channel. A laser induced fluorescence detector is positioned at the outlet of the gel filled capillary chamber to detect the labeled DNA fragments, as described
25 above in Example 2.

EXAMPLE 13

Spectrophotometer Pathlength Extension

The following experiment is carried out in a disk of the present invention.

The transverse dimension of the disk is 10 mm. The disk is 1 mm thick.

is dependent on the depth of the absorbing layer, as well as the concentration of the absorbing molecules (as described in the Lambert-Beer law).

Although a measurement cell in a rotating microsystem platform of the invention presents a short transverse pathlength, the lateral pathlength through the disk can be
5 extensive (*i.e.*, centimeters *versus* millimeters). Spectral measurements can be enhanced by introducing light through the detection chamber in the lateral dimension.

One arrangement providing transverse illumination in the lateral dimension is shown in Figure 16. Light is beamed in a perpendicular direction towards the disk. A mirror is positioned at a 45° angle to the direction of the illuminating beam, whereby the
10 light is directed laterally through the detection chamber. Light passes through the detection cell and is redirected by another 45° mirror onto a photosensitive detector, such as a photodiode or photomultiplier tube. These mirrors can be inserted onto the disk, integrally molded into the disk or metallicized in the plastic or other substrate comprising the disk.

15

EXAMPLE 14

Cell Counting, Identification and Monitoring

Methods for identifying particular cells or cell types in a biological sample are provided. For example, a microplatform of the invention is prepared by having a surface
20 adsorbly coated with monoclonal antibody specific to *E. coli*, the remaining sites being blocked with BSA. A milk sample is introduced onto the disk and placed into contact with a reaction chamber comprising the surface coated with the antibody. The milk is incubated in this chamber for 30 min. The microsystem platform is then rotated to remove unwanted materials. An amount of a buffer appropriate for washing the
25 microsystem chamber is then added to the surface or chamber through a microchannel from a reservoir containing washing buffer, said buffer being released by centrifugal force and opening of a microvalve. In a useful embodiment, the washing buffer comprises an *E. coli*-specific monoclonal antibody crosslinked to an enzyme (such as peroxidase). This incubation is allowed to proceed for 5 min. The disk is again spun

and hydrogen peroxide, maintained heretofore in a reagent reservoir connected to the reaction chamber by a microvalve-controlled microchannel. The amount of *E. coli* bound in the reaction chamber is quantitated with regard to the amount of detected enzymatic activity, which is determined spectrophotometrically by the appearance of a
5 light-absorbing product or the disappearance of a light-absorbing substrate.

It should be understood that the foregoing disclosure emphasizes certain specific embodiments of the invention and that all modifications or alternatives equivalent thereto are within the spirit and scope of the invention.

What is claimed is:

1. A centripetally-motivated fluid micromanipulation apparatus that is a combination of

5 a microsystem platform, comprising a substrate having a first flat, planar surface and a second flat, planar surface opposite thereto, wherein the first surface comprises a multiplicity of microchannels embedded therein and a sample input means, wherein the sample input means and the microchannels are connected and in fluidic contact, and wherein the second flat, planar surface opposite to the first flat planar surface of the platform is encoded with an eletromagnetically-readable instruction set for controlling rotational speed, duration, or direction of the platform, and

10 a micromanipulation device, comprising a base, a rotating means, a power supply and user interface and operations controlling means, wherein the rotating means is operatively linked to the microsystem platform and in rotational contact therewith

15 wherein a volume of a fluid within the microchannels of the platform is moved through said microchannels by centripetal force arising from rotational motion of the platform for a time and a rotational velocity sufficient to move the fluid through the microchannels.

20 2. A centripetally-motivated fluid micromanipulation apparatus that is a combination of

a microsystem platform, comprising a substrate having a first flat, planar surface and a second flat, planar surface opposite thereto, wherein the first surface comprises a multiplicity of microchannels, a reaction chamber and a reagent reservoir embedded therein, and a sample input means, wherein the sample input means, the microchannels, 25 the reaction chamber and the reagent reservoir are connected and in fluidic contact, and wherein the second flat, planar surface opposite to the first flat planar surface of the platform is encoded with an eletromagnetically-readable instruction set for controlling rotational speed, duration, or direction of the platform, and

a micromanipulation device, comprising a base, a rotating means, a power supply

wherein a volume of a fluid within the microchannels of the platform is moved

through said microchannels by centripetal force arising from rotational motion of the platform for a time and a rotational velocity sufficient to move the fluid through the microchannels.

5 3 A centripetally-motivated fluid micromanipulation apparatus that is a combination of

 a microsystem platform, comprising a substrate having a first flat, planar surface and a second flat, planar surface opposite thereto, wherein the first surface comprises a multiplicity of microchannels, a reaction chamber and a reagent reservoir embedded
10 therein and a sample input means, wherein the sample input means, the microchannels, the reaction chamber and the reagent reservoir are connected and in fluidic contact, and wherein fluid motion from the microchannels, the reaction chamber and the reagent
 reservoir is controlled by microvalves connected thereto, and wherein the second flat, planar surface opposite to the first flat planar surface of the platform is encoded with an
15 electromagnetically-readable instruction set for controlling rotational speed, duration, or direction of the platform, and

 a micromanipulation device, comprising a base, a rotating means, a power supply and user interface and operations controlling means, wherein the rotating means is operatively linked to the microsystem platform and in rotational contact therewith

20 wherein a volume of a fluid within the microchannels of the platform is moved through said microchannels by centripetal force arising from rotational motion of the platform for a time and a rotational velocity sufficient to move the fluid through the microchannels.

25 4 The apparatus of Claim 1, wherein the first flat, planar surface and second flat, planar surface of the microsystem platform form a disk.

 5 The apparatus of Claim 1, wherein the first and second flat, planar surfaces of the microsystem platform define a centrally located aperture that is engaged

13. The apparatus of Claim 1, wherein the microsystem platform comprises a detecting chamber embedded within the first planar surface of the platform and connected to a microchannel, and wherein the micromanipulation device comprises a detecting means, whereby the detecting chamber is assayed by the detecting means to yield an assay output.

14. The apparatus of Claim 13, wherein the detecting means on the device is brought into alignment with the detection chamber on the platform by rotational motion of the microsystem platform.

15. The apparatus of Claim 13, wherein the detecting means comprises a light source and a photodetector.

16. The apparatus of Claim 15, wherein the light source illuminates the detection chamber wherein light is reflected transversely through the detection chamber and detected by a photodetector.

17. The apparatus of Claim 16, wherein the detection chamber on the microsystem platform is optically transparent.

18. The apparatus of Claim 14, wherein the detecting means is stationary and samples the detection chamber at a frequency equal to the frequency of rotation of the platform or multiples thereof.

19. The apparatus of Claim 18, wherein the detecting means comprises a stroboscopic light source.

20. The apparatus of Claim 19, wherein the detecting means is a monochromatic light source

absorbance, fluorescence, chemiluminescence, light-scattering, or radioactivity.

22. The apparatus of Claim 1, further comprising a temperature controlling element in thermal contact with the microplatform.

5 23. The apparatus of Claim 1 further comprising a thermal detecting unit in thermal contact with the microplatform.

24. The apparatus of Claim 1, wherein the microsystem platform comprises a filtering means linked to a microchannel.

10 25. The apparatus of Claim 1, wherein the microsystem platform comprises a mixing element connected to a reaction reservoir or a microchannel.

26. The apparatus of Claim 25, wherein the microsystem platform comprises a static mixer comprising a textured surface of a reaction reservoir or microchannel.

15 27. The apparatus of Claim 3, wherein the microsystem platform comprises a multiplicity of microvalves operatively linked to the microchannels, reaction reservoirs, reagent chambers, sample input means and sample outflow ports, wherein fluid flow on the microsystem platform is controlled by opening and closing the
20 microvalves.

28. The apparatus of Claim 27, wherein the microsystem platform comprises a capillary microvalve connected to a reaction chamber or microchannel.

25 29. The apparatus of Claim 1, wherein the microsystem platform comprises a multiplicity of air channels, exhaust air ports and air displacement channels.

30. The apparatus of Claim 1, wherein the rotating means of the device is an electric motor.

microsystem platform.

32 The apparatus of Claim 1, wherein the device includes a user interface comprising a monitor and an alphanumeric keypad.

5

33 The apparatus of Claim 1, wherein the device comprises an alternating current or direct current power supply.

34 The apparatus of Claim 1, wherein the microsystem platform includes an electrical connector in contact with an electric connector connected to the micromanipulation device.

10

35 The apparatus of Claim 1, wherein the device comprises a microprocessor and a memory connected thereto.

15

36 The apparatus of Claim 1, wherein the device comprises a reading or writing means.

37 The apparatus of Claim 36, wherein the reading means is a compact disk laser reading means.

20

38 The apparatus of Claim 36, wherein the writing means is a compact disk writing means

39 The apparatus of Claim 1, wherein the second flat, planar surface of the microsystem platform is encoded with machine language instructions.

25

40 The apparatus of Claim 39, wherein the machine language instructions control operation of the platform, data acquisition or analysis from the platform, data

41. The apparatus of Claim 1, wherein the micromanipulation device includes a read-only memory or permanent storage memory that is encoded with machine language instructions.

5 42. The apparatus of Claim 41, wherein the machine language instructions control operation of the platform, data acquisition or analysis from the platform, data storage and retrieval, communication to other devices, or direct apparatus performance diagnostics.

10 43. The apparatus of Claim 1 further comprising first and second microsystem platforms in contact with one another across one planar surface of each microsystem platform.

15 44. The apparatus of Claim 1, wherein the microsystem platform is rotated at a velocity of from about 1 to about 30,000rpm.

20 45. The apparatus of Claim 1, wherein fluid on the microsystem platform is moved within the microchannels of the platform with a fluid velocity of from about 0.1cm/sec to about 1000cm/sec.

25 46. An apparatus according to Claim 1 for measuring the amount of an analyte in a biological sample, wherein the microsystem platform comprises
a multiplicity of sample inlet ports, arranged concentrically around the center of the platform, wherein each of the sample inlet ports is operatively linked to
a multiplicity of microchannels arrayed radially away from the center of the platform, said microchannels being operatively linked to
a multiplicity of reagent reservoirs containing a reagent specific for the analyte to be measured, wherein release of the reagent from each of the reservoirs is controlled by a microvalve, and wherein the multiplicity of microchannels is also operatively linked

wherein movement of the biological sample from the sample inlet port and through the microchannel, and movement of the reagent from the reagent reservoir and through the microchannel, is motivated by centripetal force generated by rotational motion of the microsystem platform.

5

47. The apparatus of Claim 46 wherein the biological sample is blood, urine, cerebrospinal fluid, plasma, saliva, semen, or amniotic fluid.

10

48. The apparatus of Claim 46 wherein the analyte detection chambers are optically-transparent.

15

49. The apparatus of Claim 46 further comprising electrical wiring between each of the microvalves and an electrical controller unit, wherein valve opening and closing is controlled by electrical signals from the controller unit.

50. The apparatus of Claim 46 wherein the microchannels are arrayed linearly from the center of the platform to the periphery.

20

51. The apparatus of Claim 46 wherein the microchannels are arrayed concentrically from the center of the platform to the periphery.

52. The apparatus of Claim 46 wherein the micromanipulation device comprises a detecting means.

25

53. The apparatus of Claim 46 wherein the detecting means is stationary and samples the analyte detection chamber output at a frequency equal to the frequency of rotation of the platform or multiples thereof.

54. The apparatus of Claim 46 wherein the detecting means comprises a

55. The apparatus of Claim 46 wherein the detecting means is a

monochromatic light source.

56. The apparatus of Claim 46, wherein the detecting means detects fluorescence, chemiluminescence, light-scattering or radioactivity.

5

57. A method for measuring the amount of an analyte in a biological sample, the method comprising the steps of

applying the biological sample to a sample inlet port of the microsystems platform of Claim 46,

10

placing the microsystems platform in a micromanipulation device,

providing rotational motion to the microsystems platform for a time and at a velocity sufficient to motivate the biological sample containing the analyte from the sample inlet port through the microchannel,

15

opening each of the microvalves controlling release of the reagent from the reagent reservoirs by generating a signal from the controlling unit, at a time and for a duration whereby the reagent moves into the microchannel and is mixed with the biological sample,

20

observing the mixture of the biological sample and the reagent in the analyte detection chamber, whereby a detector comprising the device detects a signal proportional to the amount of the analyte present in the biological sample, and recording the measurement of the amount of the analyte in the biological sample.

25

58. The method of Claim 57, wherein the biological sample is blood, urine, cerebrospinal fluid, plasma, saliva, semen, or amniotic fluid.

59. The method of Claim 57, wherein the measurement of the amount of analyte in the sample is recorded in the device, on the microplatform, or both.

60. The method of Claim 57, wherein the analyte detection chamber on the

61. The method of Claim 57, wherein the signal detected is analyzed by a

detection chamber is detected at a frequency equal to the frequency of rotation of the platform or multiples thereof.

5 62. The method of Claim 57, wherein the signal detected is a monochromatic light signal.

63. The method of Claim 62, wherein the signal detected is a fluorescence signal, a chemiluminescence signal or a colorimetric signal.

10 64. An apparatus according to Claim 1 for detecting gas or particles comprising an environmental sample, wherein the microsystem platform comprises a multiplicity of sample inlet ports, arranged concentrically around the center of the platform, wherein the sample ports comprise an air intake vent and connecting funnel channel, wherein each of the sample inlet ports is operatively linked to
15 a multiplicity of microchannels arrayed radially away from the center of the platform, said microchannels being operatively linked to a multiplicity of reagent reservoirs containing a reagent specific for the gas or particles to be detected, wherein release of the reagent from each of the reservoirs is controlled by a microvalve, wherein the microvalves are in electrical contact with a controller unit, and wherein the multiplicity of microchannels is also operatively linked to
20 a multiplicity of gas or particle detectors arranged peripherally around the outer edge of the microplatform, wherein movement of the environmental sample from the sample inlet port and
25 through the microchannel, and movement of the reagent from the reagent reservoir and through the microchannel, is motivated by centripetal force generated by rotational motion of the microsystem platform.

65. The apparatus of Claim 64, wherein the environmental sample comprises

chip.

67. The apparatus of Claim 64, wherein the detector comprises an optically-transparent particle collection chamber.

68. The apparatus of Claim 67, wherein the detector also comprises a coherent light source.

69. The apparatus of Claim 68, wherein the particles are detected by light scattering.

70. The apparatus of Claim 64, wherein the detector comprises a particle collection chamber operatively connected by a microchannel to a reagent reservoir comprising a reagent for chemically testing the particles.

71. A method for detecting gas or particles comprising an environmental sample, wherein the method comprises the steps of

contacting the environmental sample with a sample inlet port of the microsystems platform of Claim 64,

placing the microsystems platform in a micromanipulation device,

providing rotational motion to the microsystems platform for a time and at a velocity sufficient to motivate the gaseous or particulate environmental sample from the sample inlet port through the microchannel,

opening each of the microvalves controlling release of the reagent from the reagent reservoirs by generating a signal from the controlling unit, at a time and for a duration whereby the reagent moves into the microchannel and is mixed with the environmental sample,

detecting the mixture of the environmental sample and the reagent or the gaseous or particulate component of the environmental sample directly in the gas or particle

recording the measurement of the mixture of the reagent and the environmental sample

environmental sample

72. The method of Claim 71, wherein the environmental sample comprises air, water, soil, or disrupted biological matter.

5

73. The method of Claim 71, wherein a gas is detected by a gas sensor chip

74. The method of Claim 71, wherein a particle is detected in an optically-transparent particle collection chamber.

10

75. The method of Claim 71, wherein the particle is detected by coherent light scattering.

76. The method of Claim 71, wherein a particle is detected in a particle collection chamber operatively connected by a microchannel to a reagent reservoir comprising a reagent for chemically testing the particles, wherein the particulate is mixed and reacted with the reagent in the microchannel after release of the reagent by activation of a microvalve and rotation of the platform.

15

77. An apparatus according to Claim 1, wherein the microsystem platform is comprised of a stacked layer of thin film disks comprising microchannels, sample inlet ports, reactant reservoirs, reaction chambers and sample outlet ports, wherein each of the stacked film disks is self-contained and provides a platform of the invention.

20

78. An apparatus of Claim 1 for determining a hematocrit value from a blood sample, wherein the microsystem platform is comprised of a radial array of microchannels having a diameter of about 100 μ m wherein the microchannels are treated with heparin to prevent coagulation, and wherein the microchannels are open at one end proximal to the center of this disk, the apparatus also comprising a coherent light source

25

motivated by centripetal force generated by rotational motion of the microsystem

platform.

79. An apparatus of Claim 78, wherein the coherent light source is mounted on a movable track arrayed radially from the center of rotation of the platform.

5

80. An apparatus of Claim 78 further comprising a Clarke electrode operatively connected to each of the microchannels of the microsystem platform, wherein the electrode is in contact with a blood sample within the microchannel.

10

81. An apparatus of Claim 78 further comprising a Severing electrode operatively connected to each of the microchannels of the microsystem platform, wherein the electrode is in contact with a blood sample within the microchannel.

15

82. A method for determining a hematocrit value from a blood sample, the method comprising the steps of

applying the blood sample to the proximal end of a microchannel of the microsystems platform of Claim 78,

placing the microsystems platform in a micromanipulation device,

20

providing rotational motion to the microsystems platform for a time and at a velocity sufficient to motivate the red blood cells comprising the blood sample to move along the extent of the microchannel,

scanning the microchannel along its length with the coherent light source,

detecting a change in light scatter at a position along the microchannel that defines a boundary between the red blood cells and blood plasma,

25

recording the position of the boundary for each microchannel, and

comparing the position of this boundary for each microchannel with a standard curve relating hematocrit values to the position of the boundary, and recording the hematocrit determined thereby.

microsystems platform of Claim 80,



placing the microsystems platform in a micromanipulation device,

providing rotational motion to the microsystems platform for a time and at a velocity sufficient to motivate the blood sample to come in contact with the Clarke
5 electrode connected to the microchannel,

detecting a blood oxygenation value for the blood sample, and
recording the blood oxygenation value determined thereby.

84. An apparatus of Claim 1, wherein the microsystem platform comprises
10 a multiplicity of sample input means, reactant reservoirs, reaction chambers, microvalves
and microchannels operatively connected thereto and embedded therein, wherein the
microsystem platform is comprised of a stacked array of layers wherein a first layer
comprises the sample input means, reactant reservoirs, reaction chambers and
microchannels, a second layer comprises the microvalves, a third layer comprises
15 electrical connections from the microvalves to an electrical controller unit, and the fourth
layer comprises a sealing layer, wherein the layers are stacked on top of the solid
substrate of the microsystems platform and fused thereto.


1/64

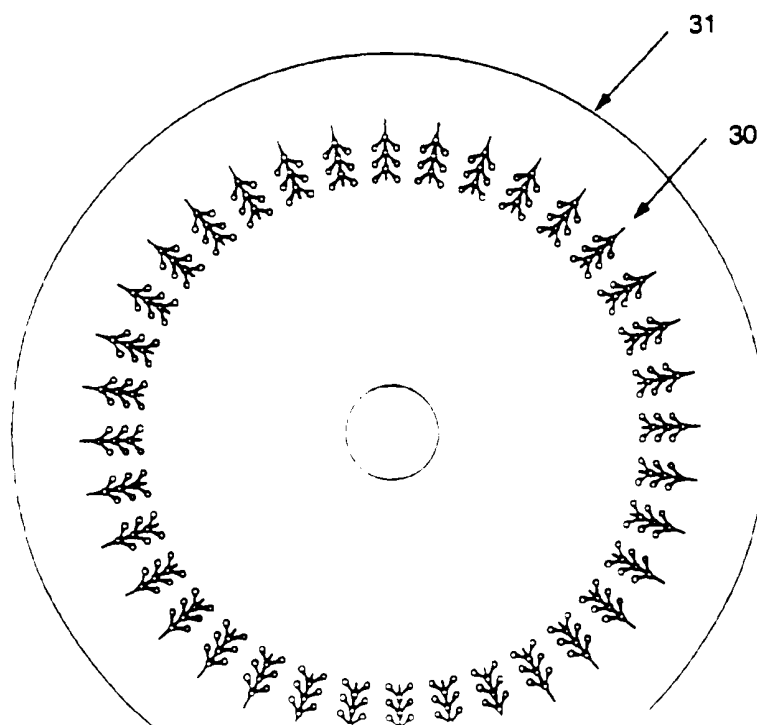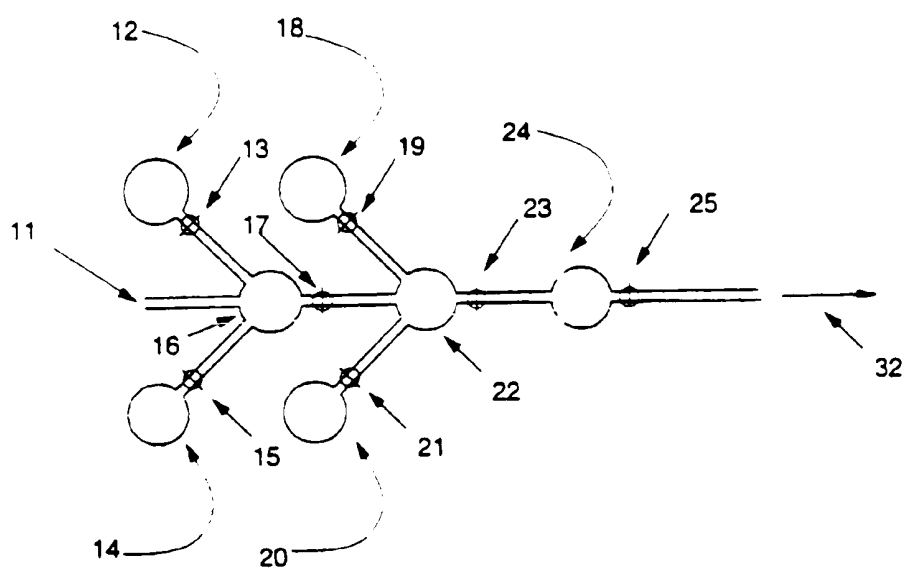FIG. 1AFIG. 1C

SUBSTITUTE SHEET (RULE 26)

2/64

FIG. 1B

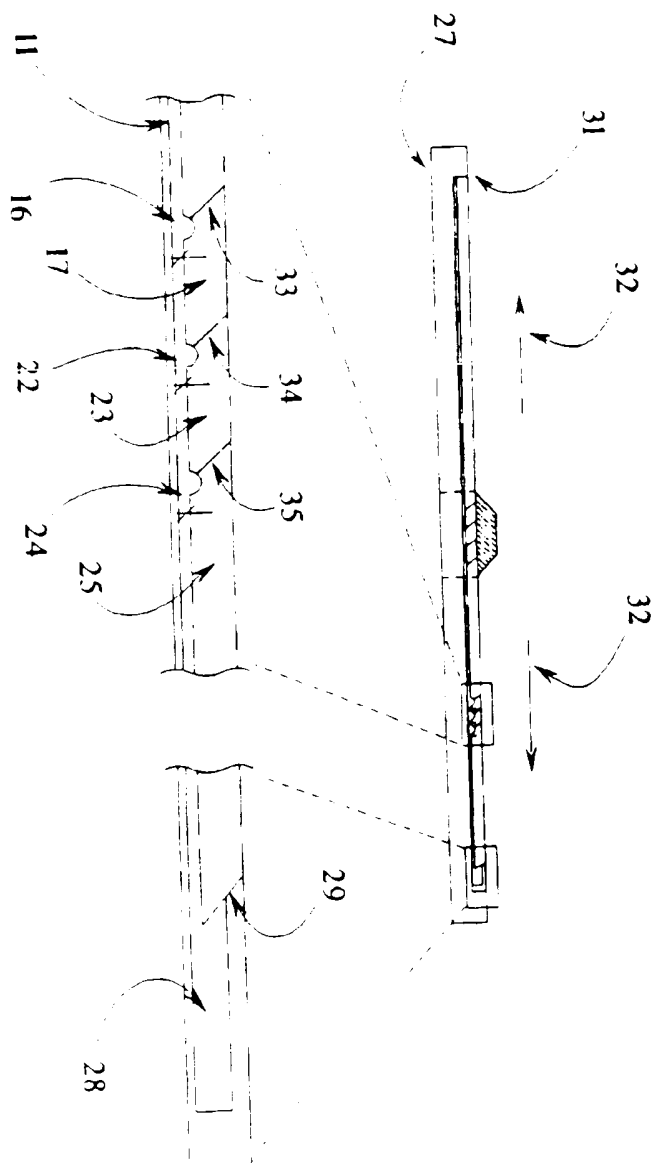

3/64



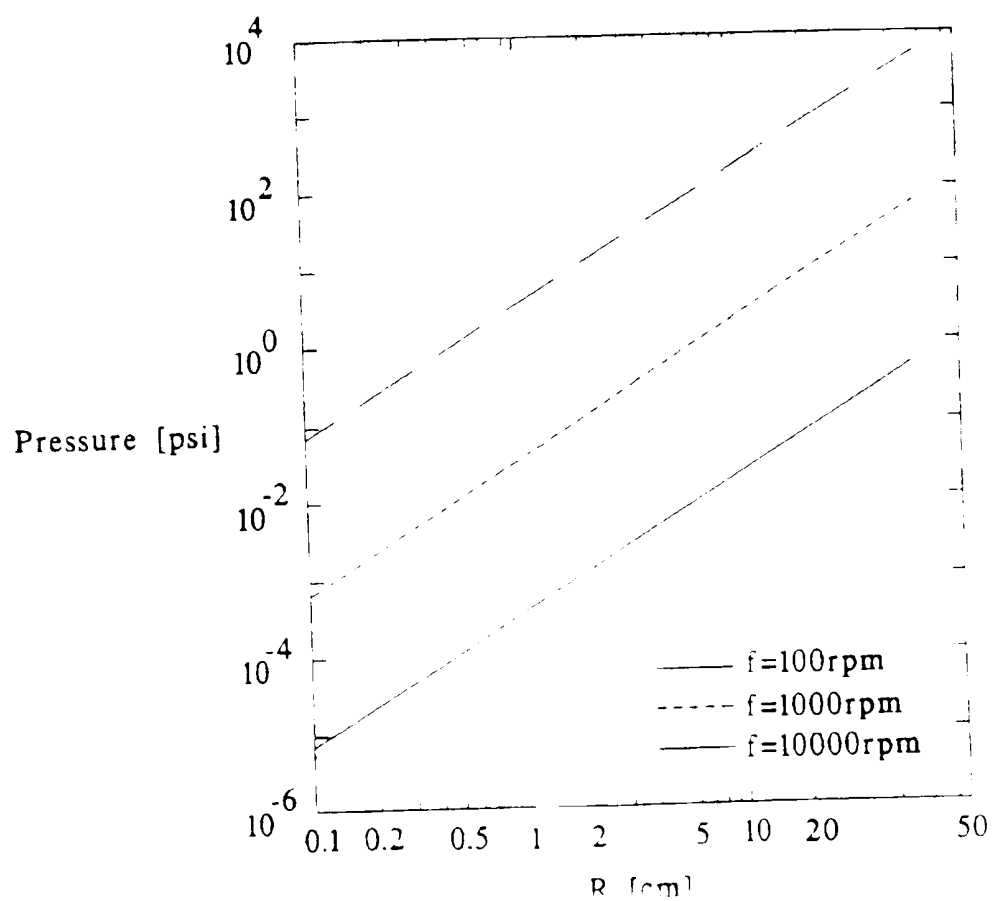
FIG. 2A


FIG. 2B

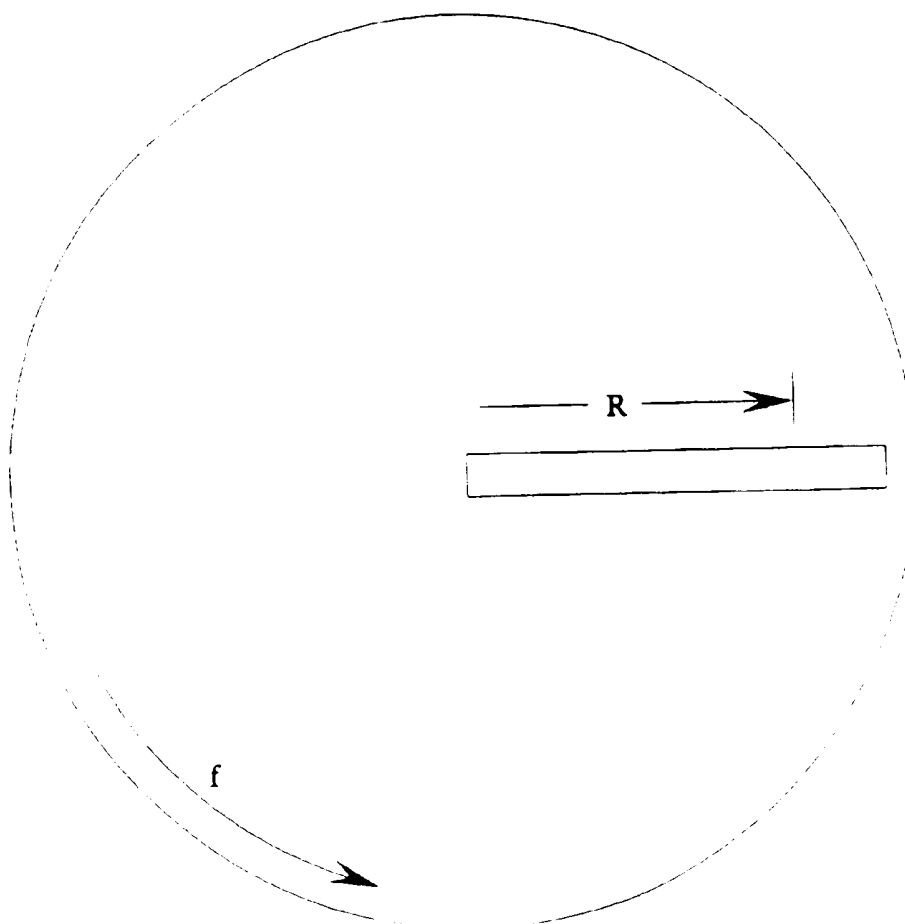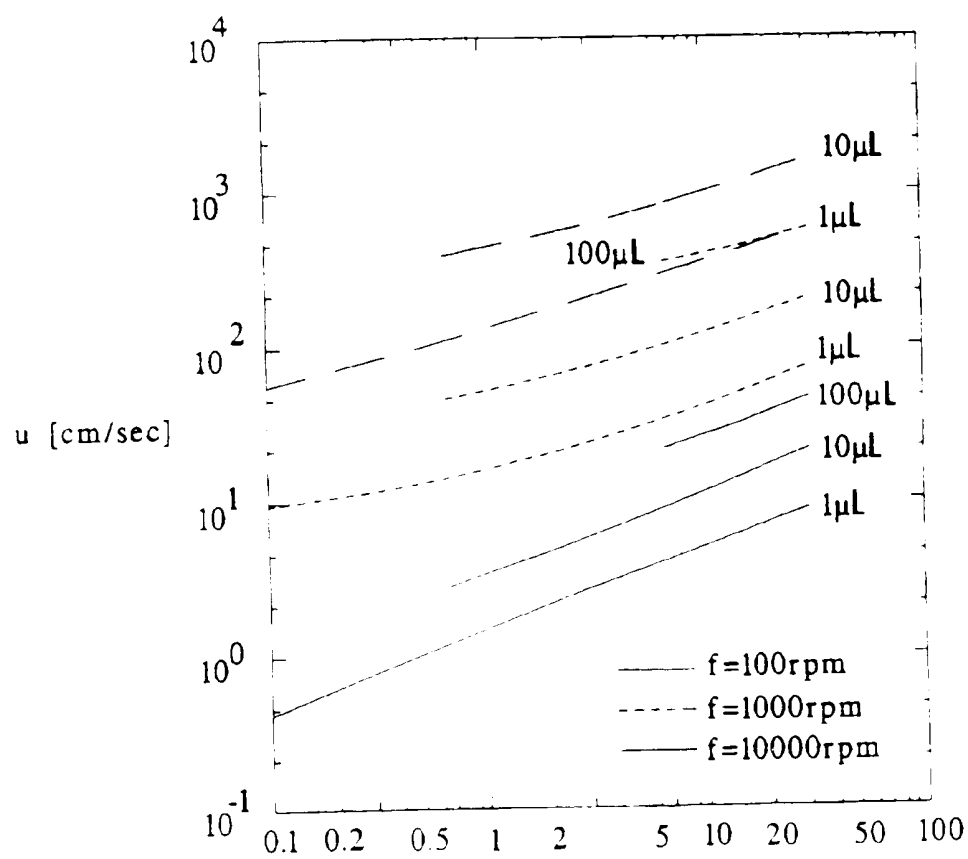


5/64

FIG. 3A

6/64

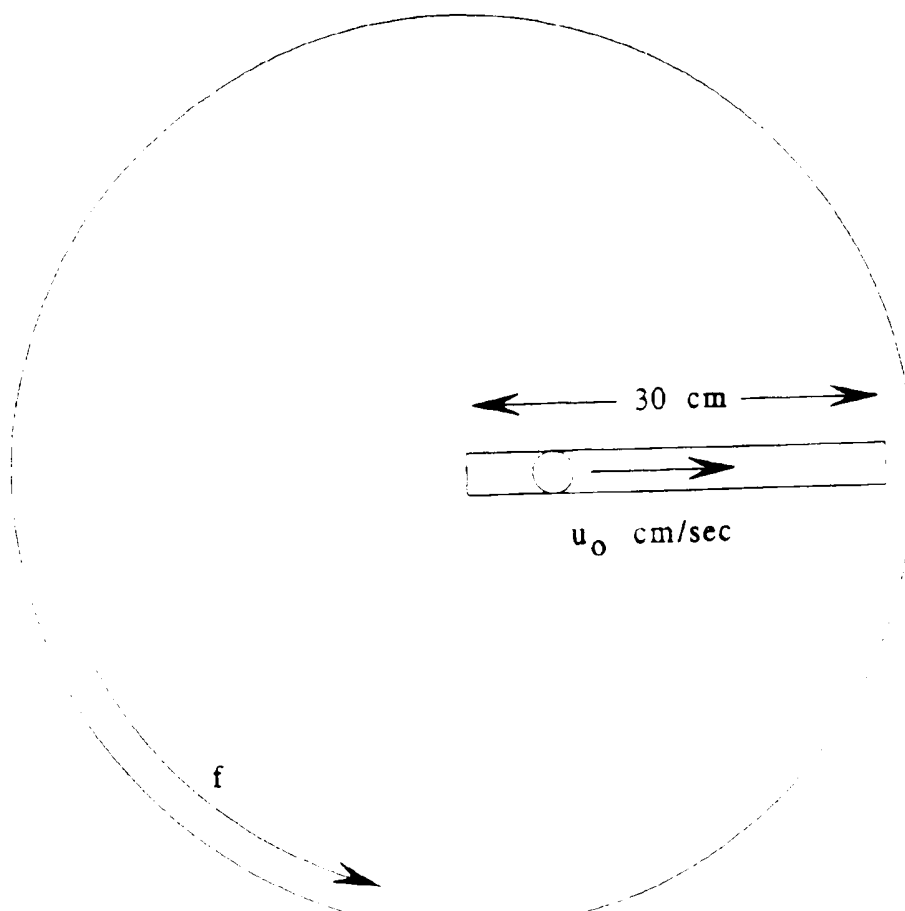
FIG. 3B

7/64

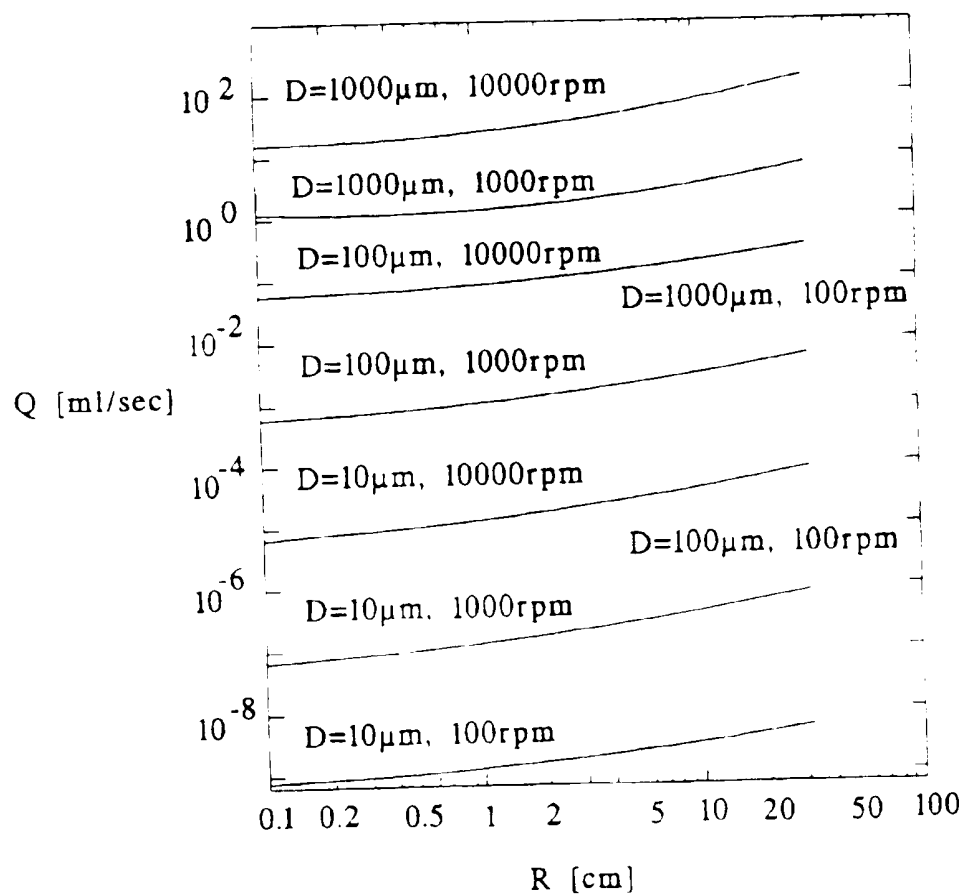
FIG. 4A

8/64


FIG. 4B

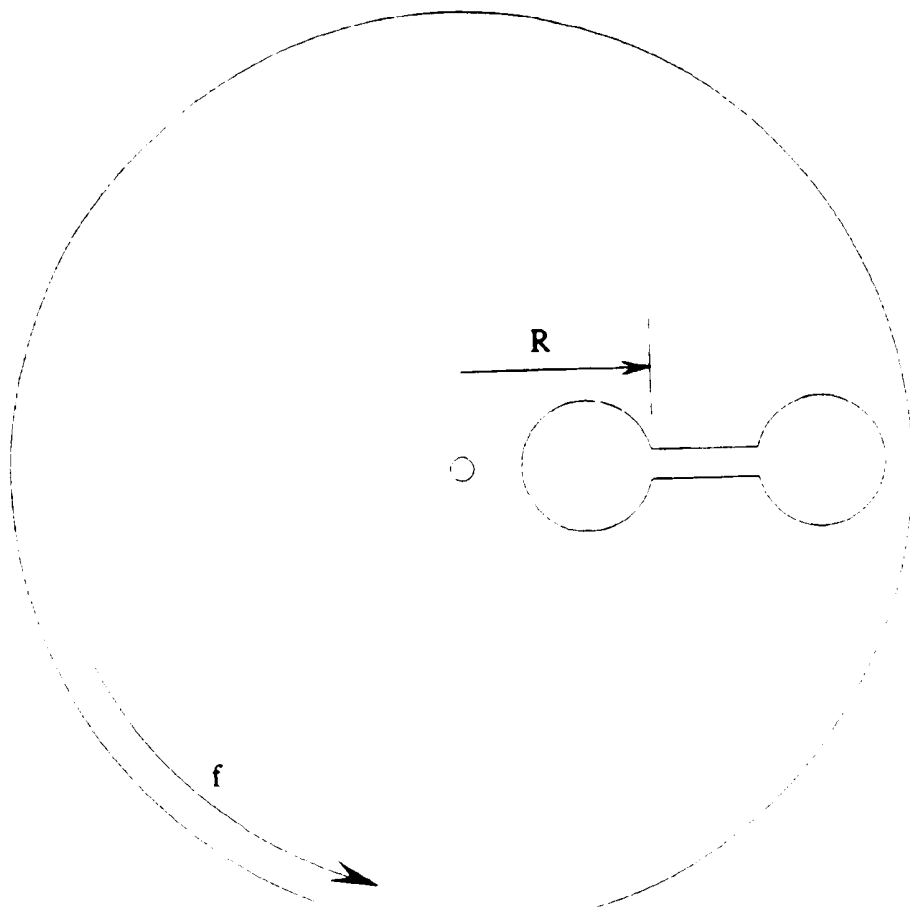

9/64

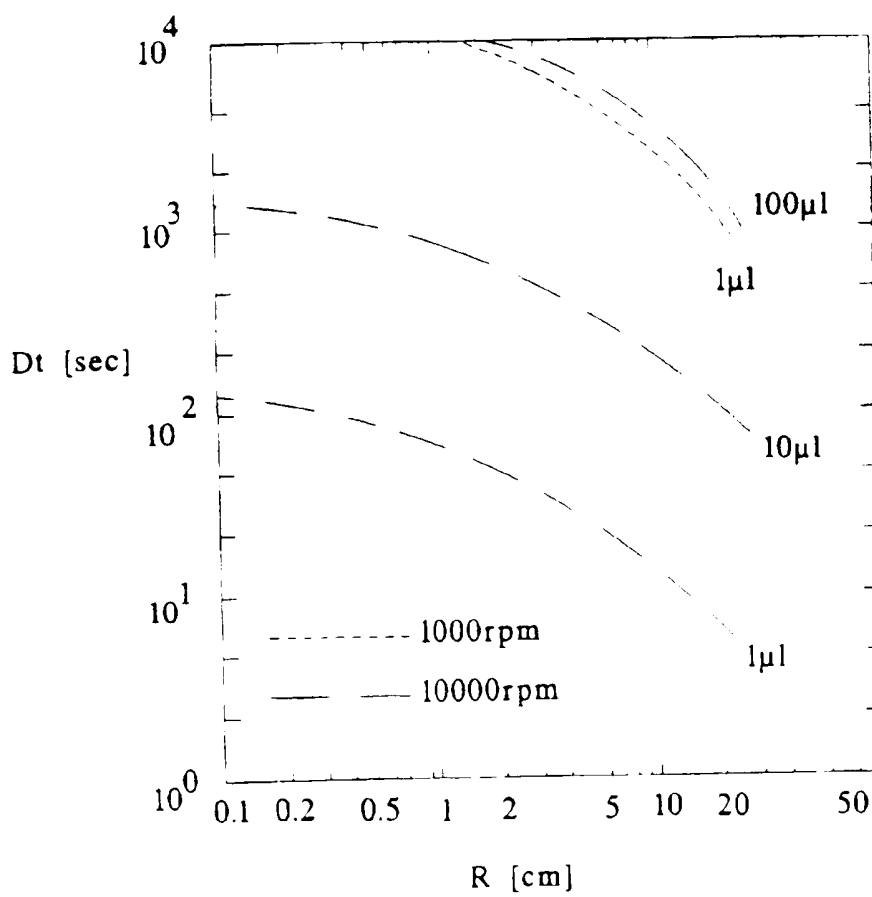
FIG. 5A

10/64

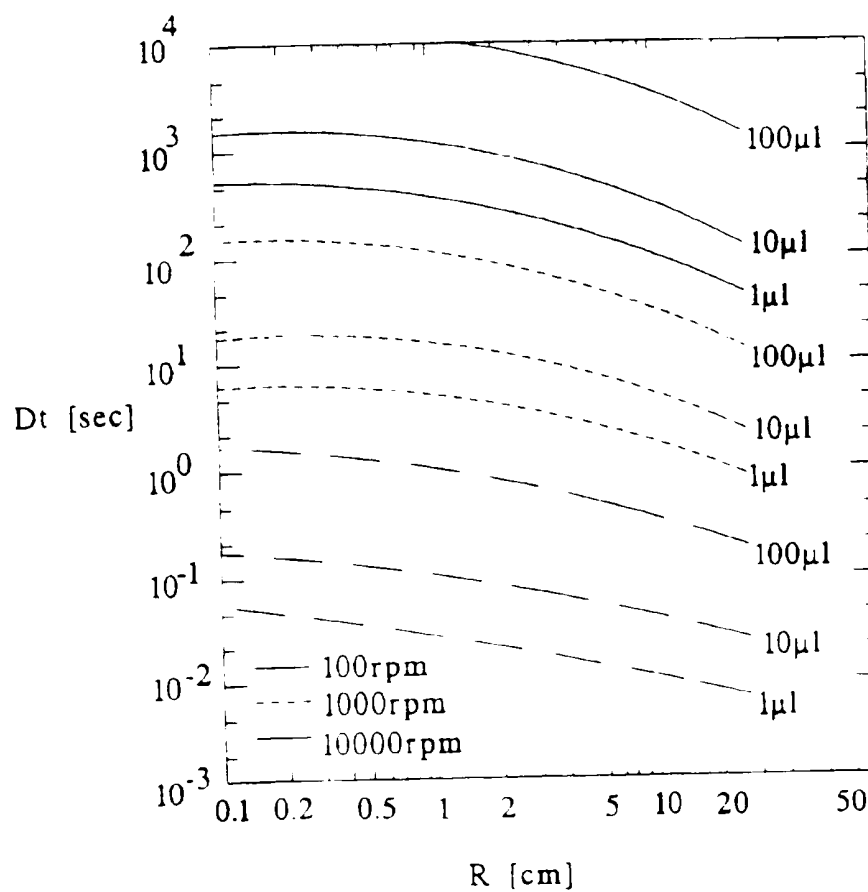FIG. 5B

SUBSTITUTE SHEET (RULE 26)


11/64

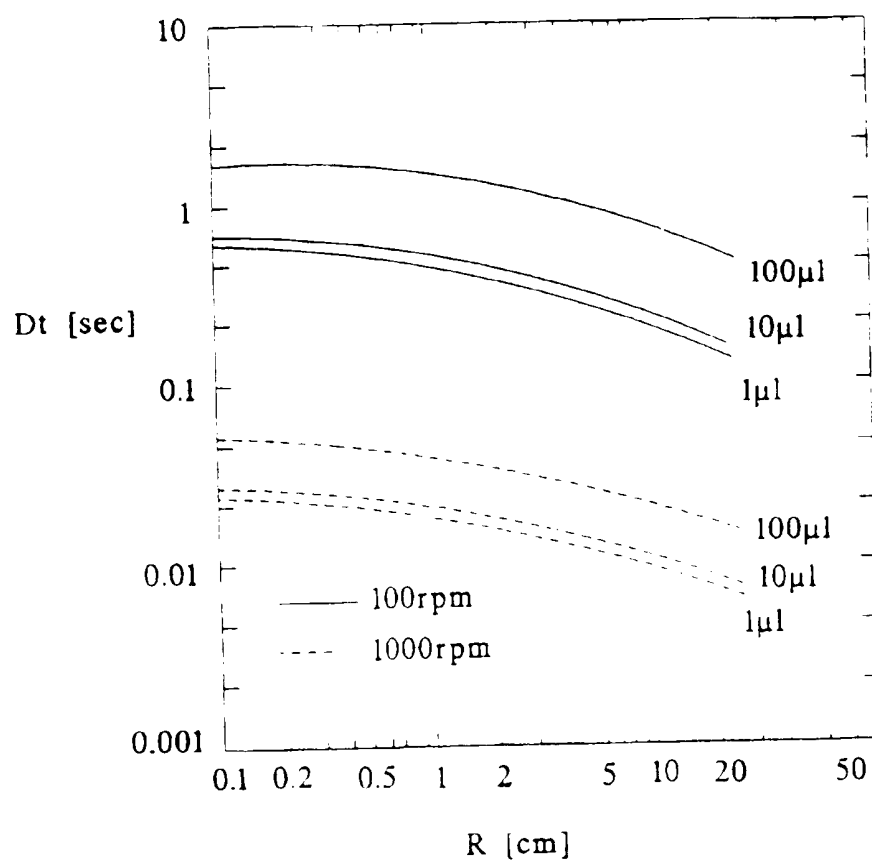FIG. 5C



SUBSTITUTE SHEET (RULE 26)

12/64


FIG. 5D

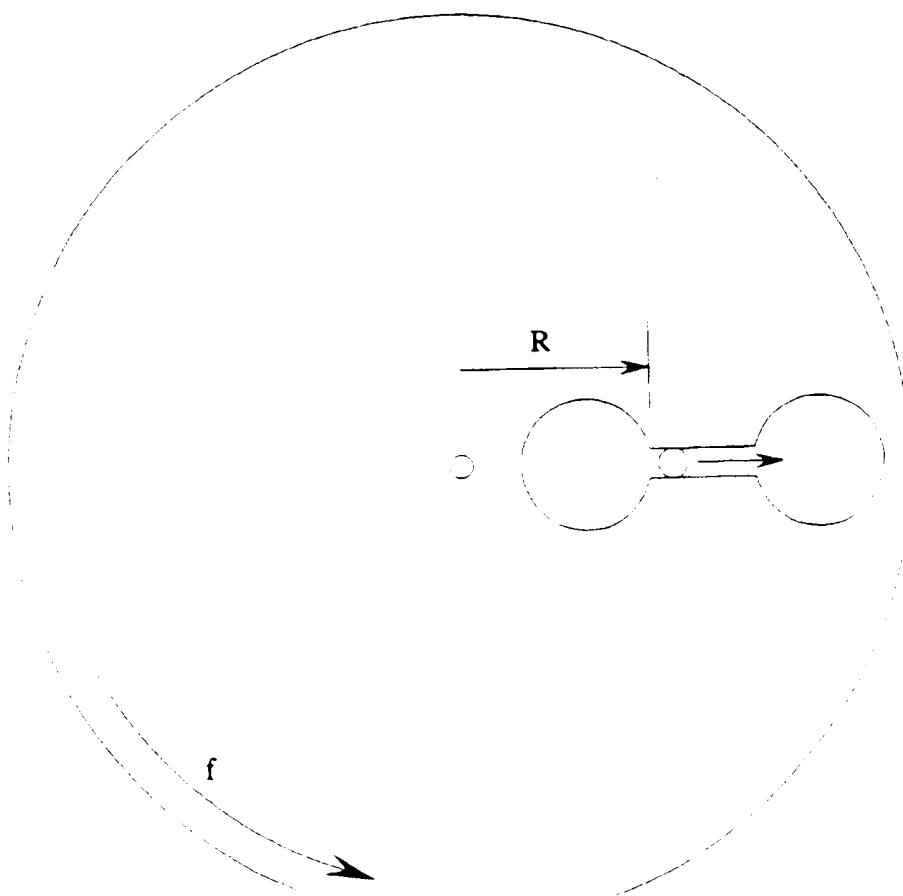

13/64

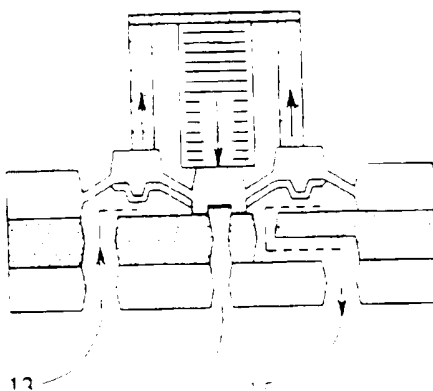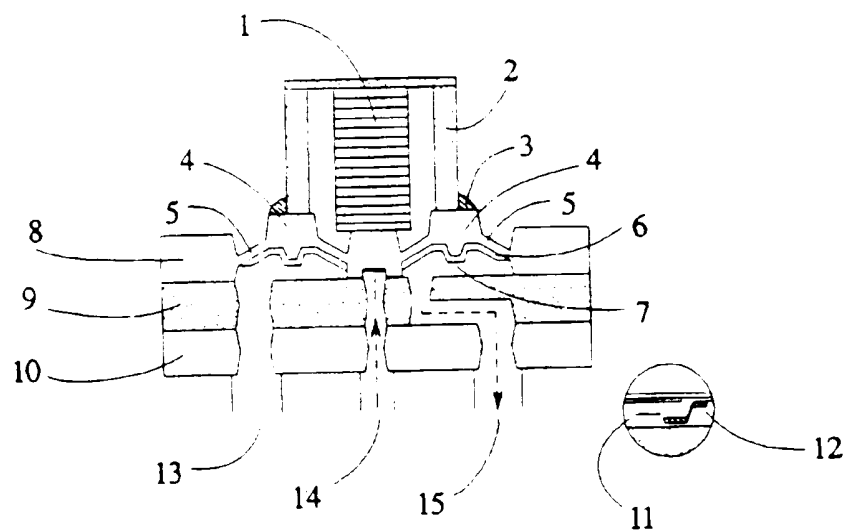
FIG. 6

14/64

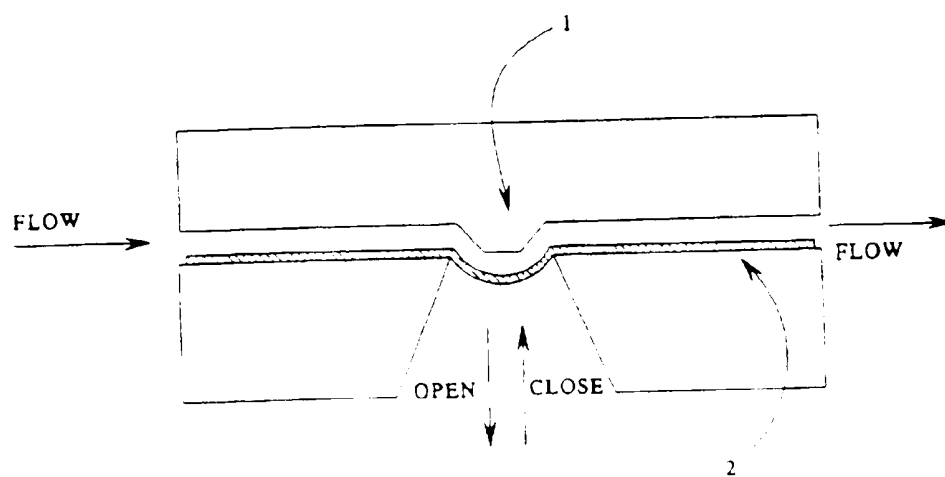FIG. 7


15/64

FIG. 8

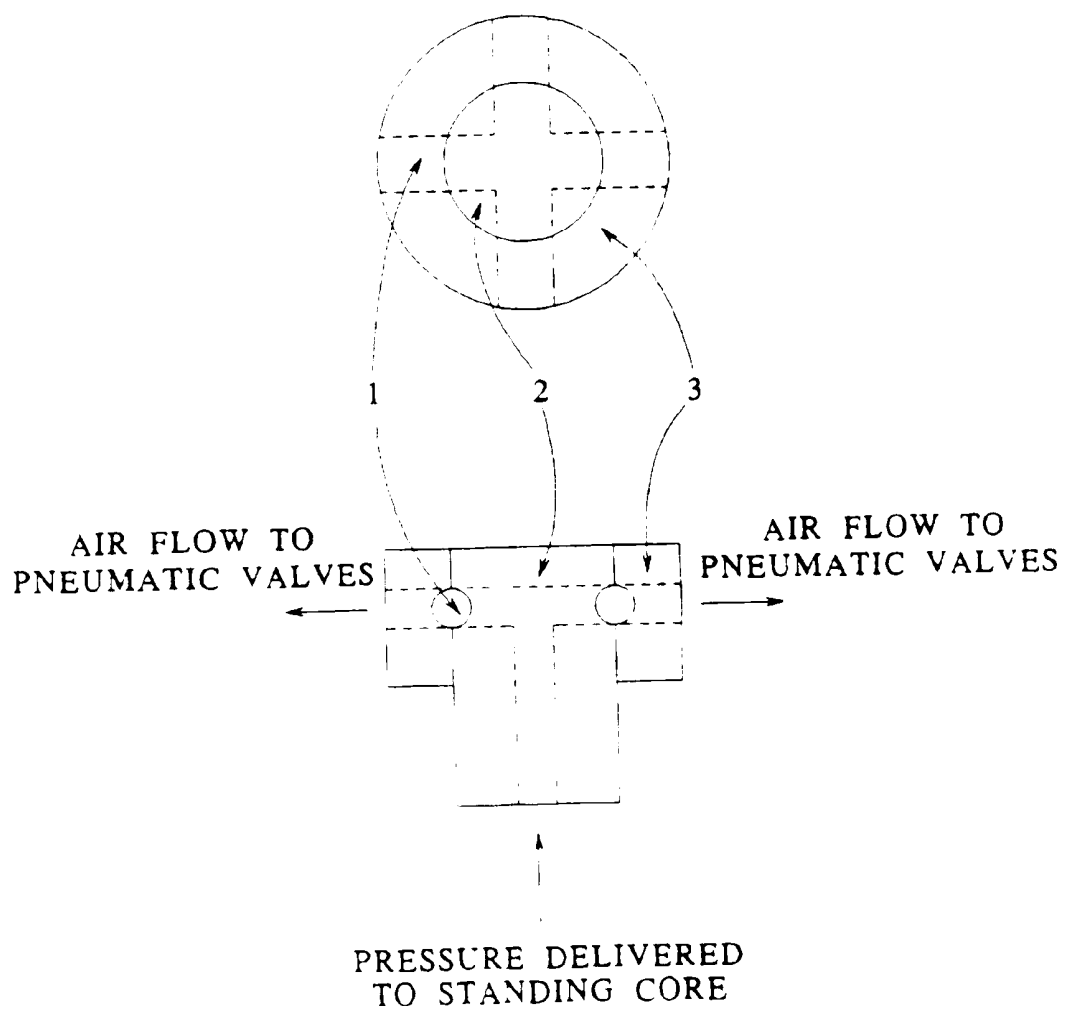


16/64

FIG. 9

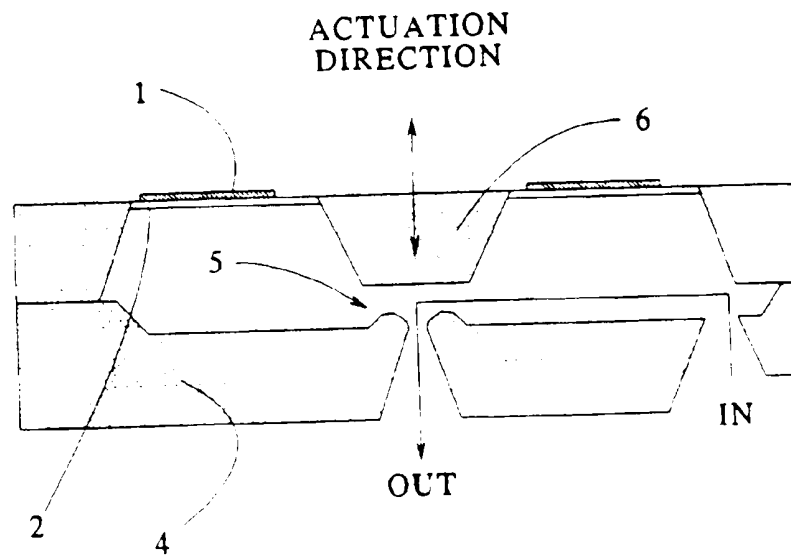


17/64

FIG. 10


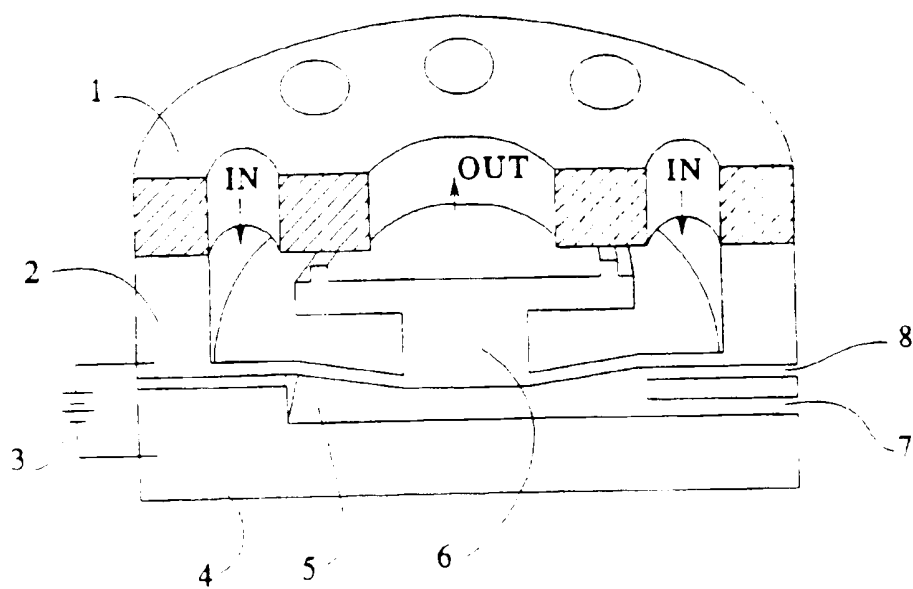


18/64

FIG. 11

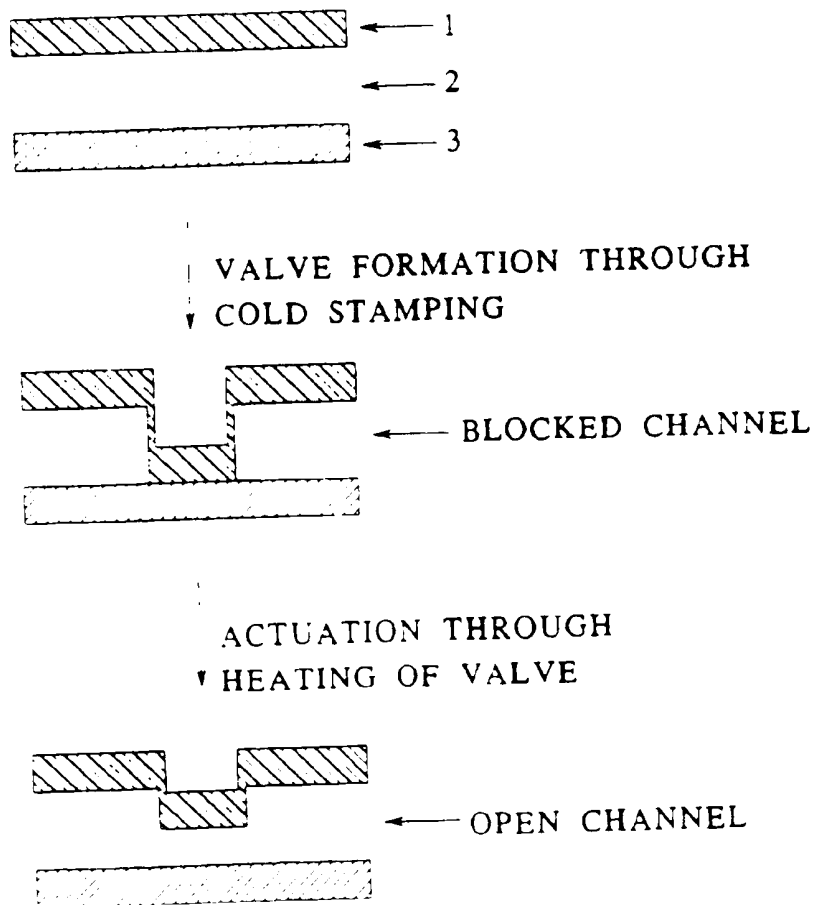


19/64

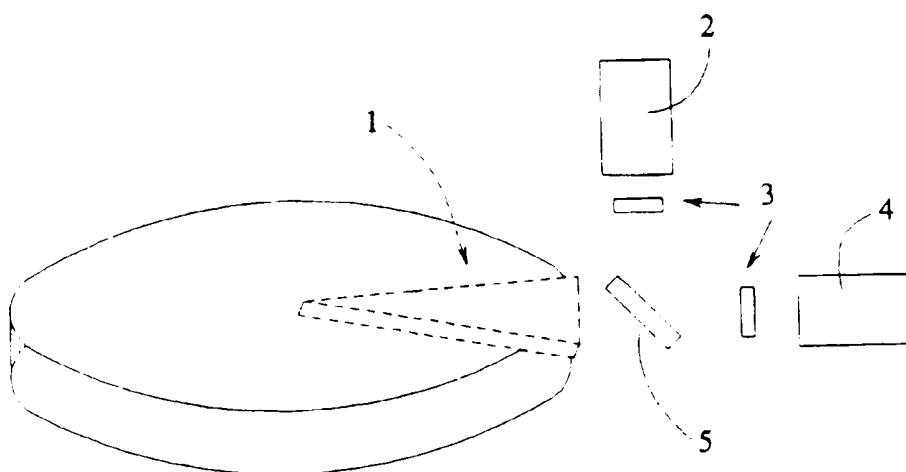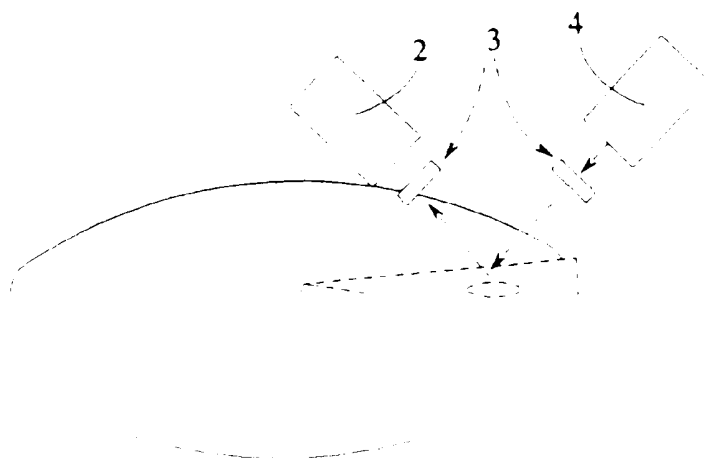FIG. 12AFIG. 12B


20/64

FIG. 13A

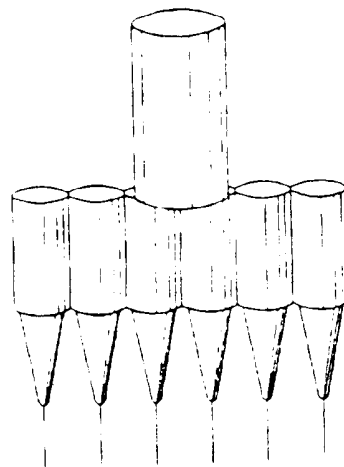

LINEAR
CONFIGURATION

FIG. 13B

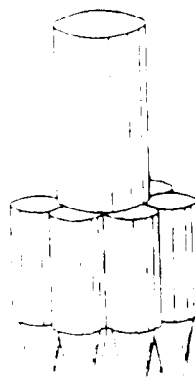

RADIAL
CONFIGURATION

21/64

FIG. 13C

RADIAL
CONFIGURATION


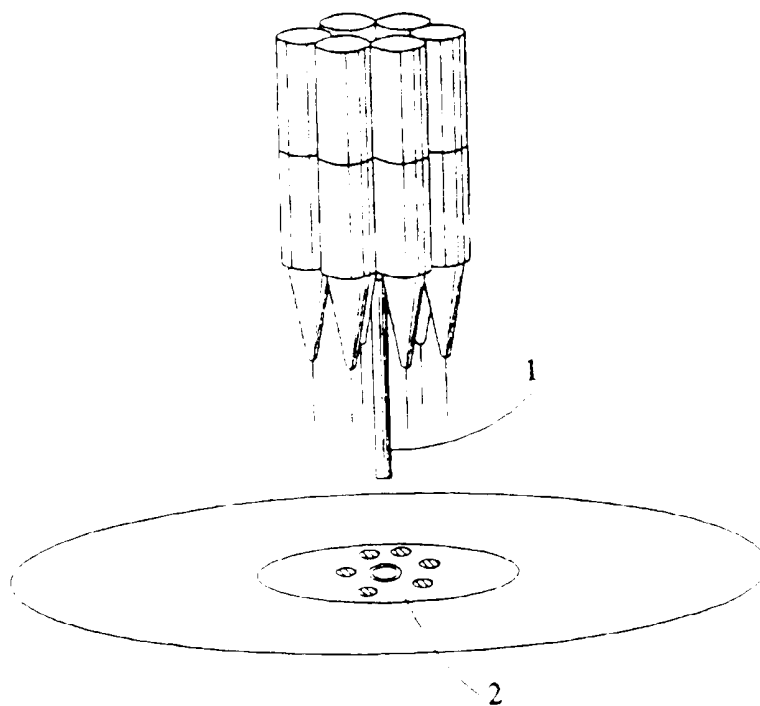


FIG. 14A

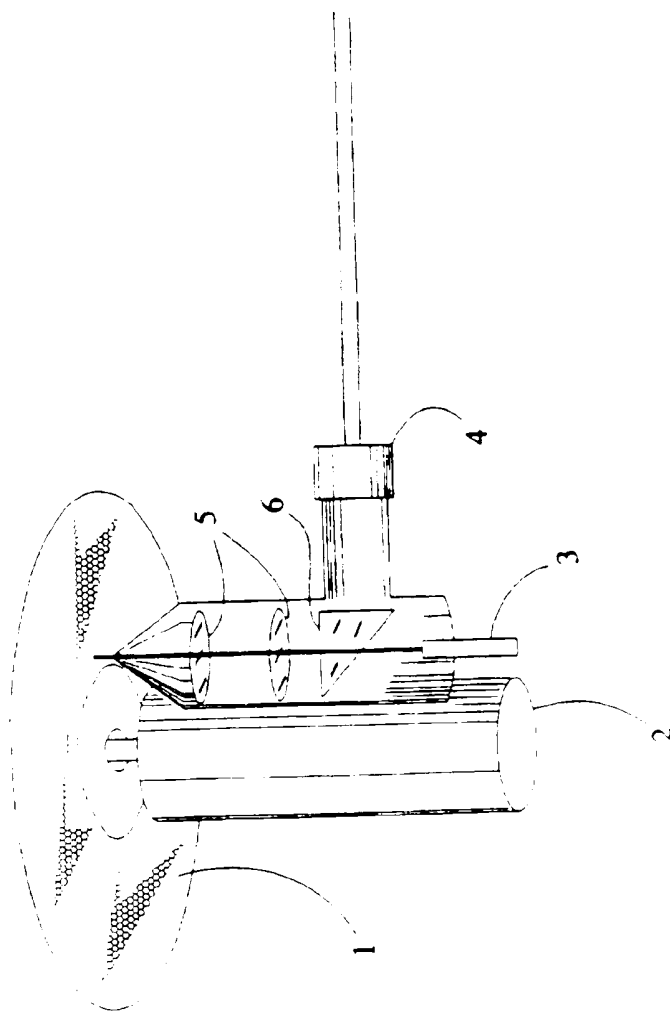

23/64

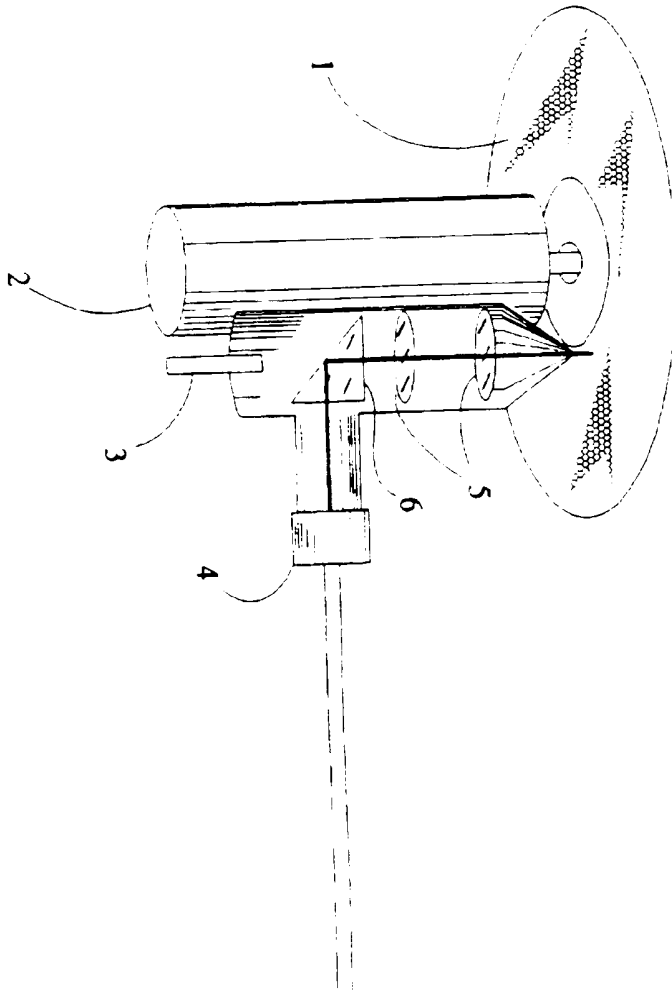
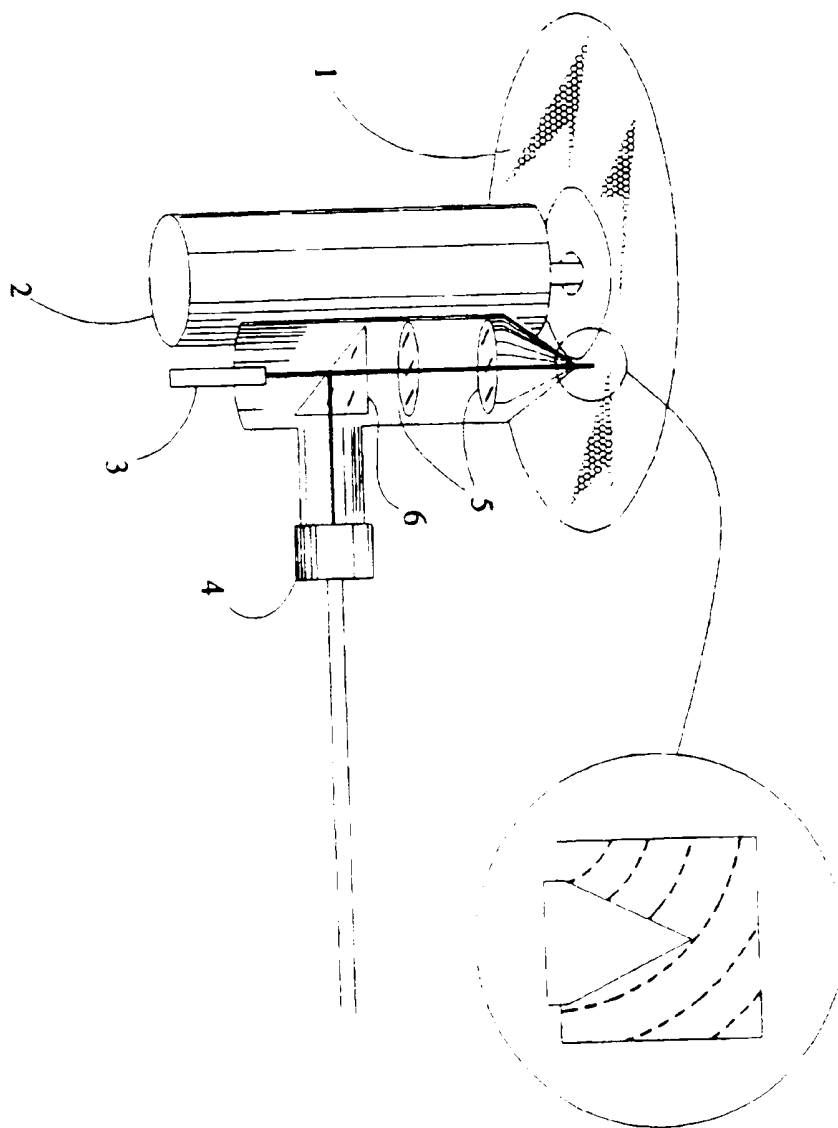


FIG. 14B

24/64

FIG. 14C



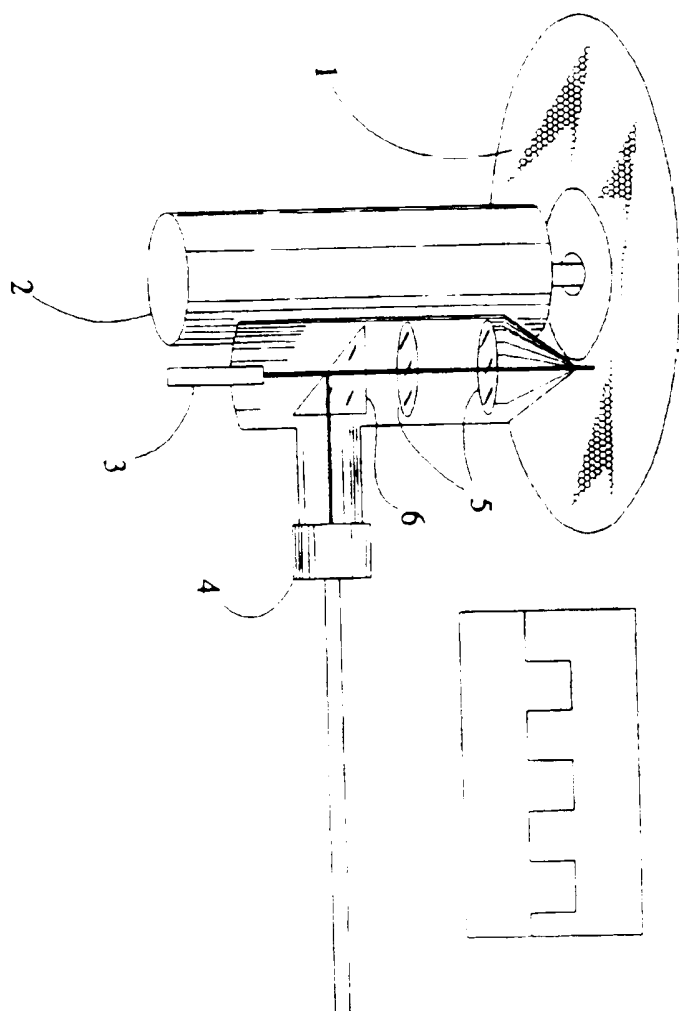


FIG. 14D

The laser beam focuses on the pits and lands of the disc and is reflected onto the photo diode.

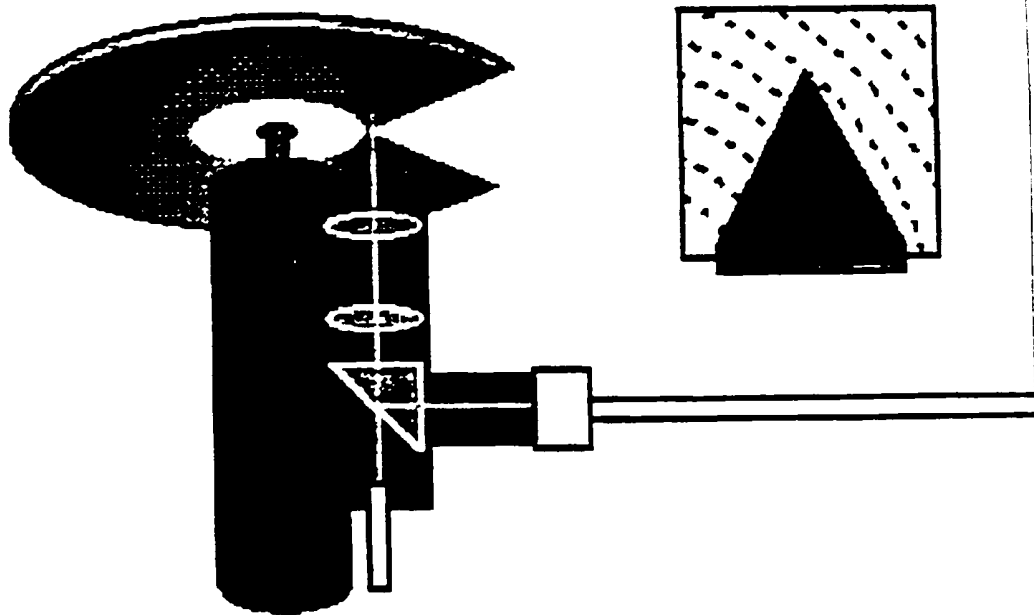


Figure 14E

The photo diode converts the pulses into an electrical signal.

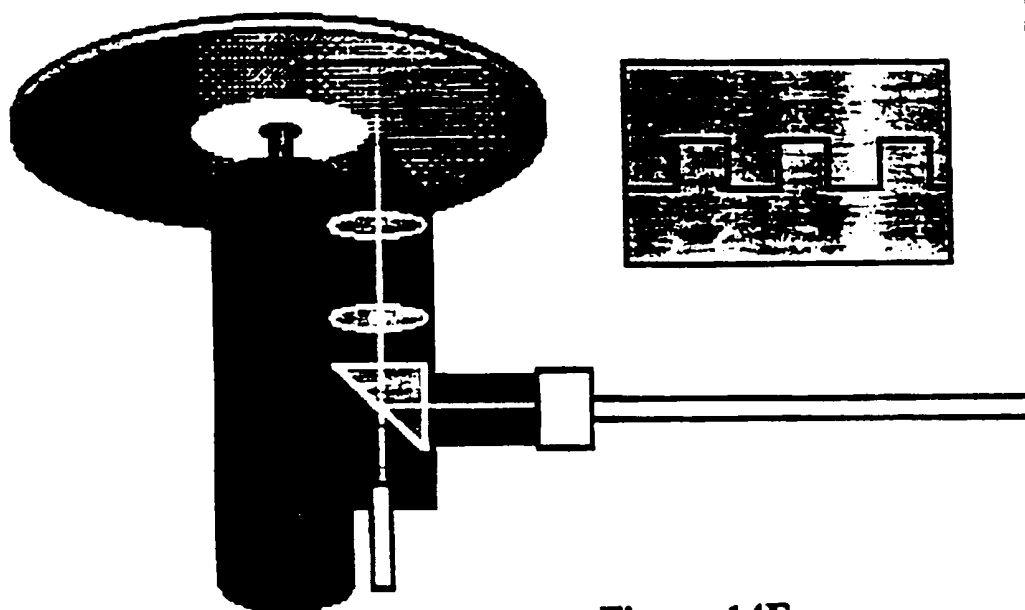


Figure 14F



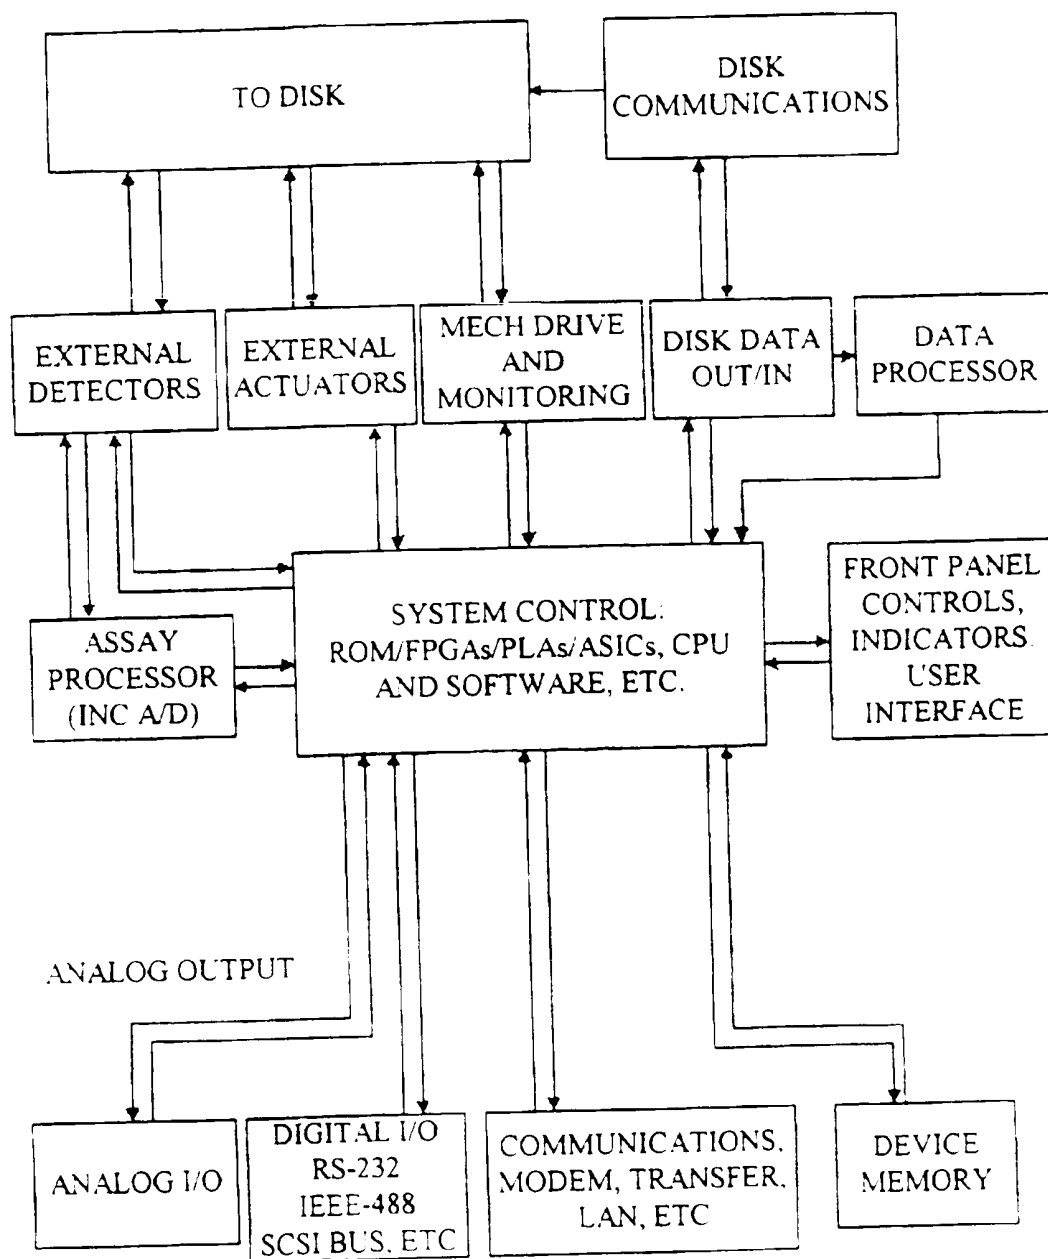
FIG. 15

FIG. 16

30/64

FIG. 17A

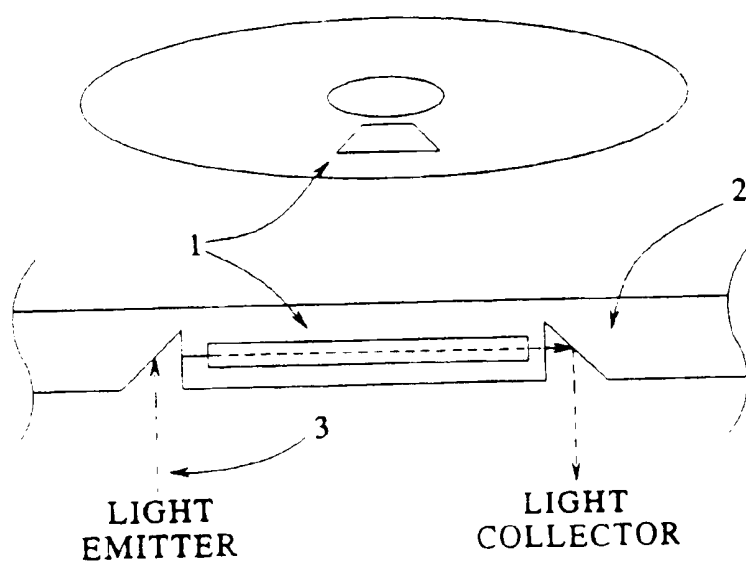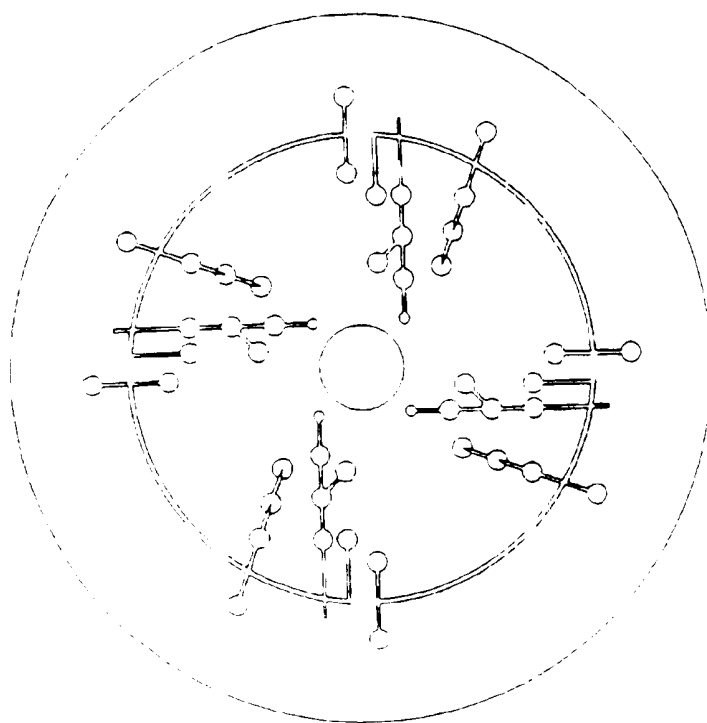

31/64

FIG. 17B

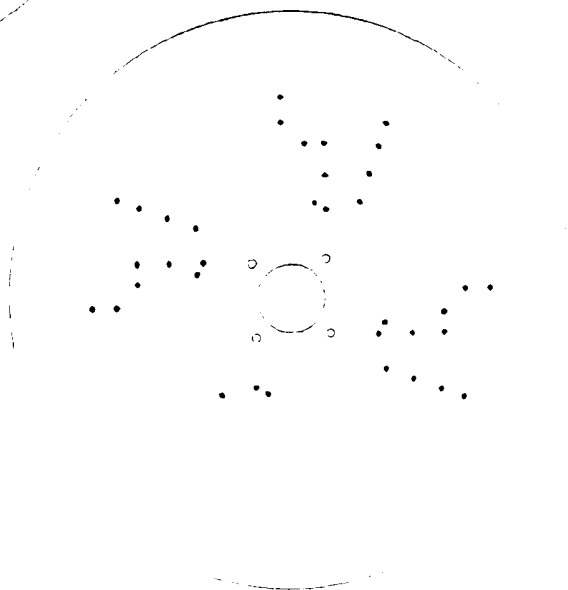
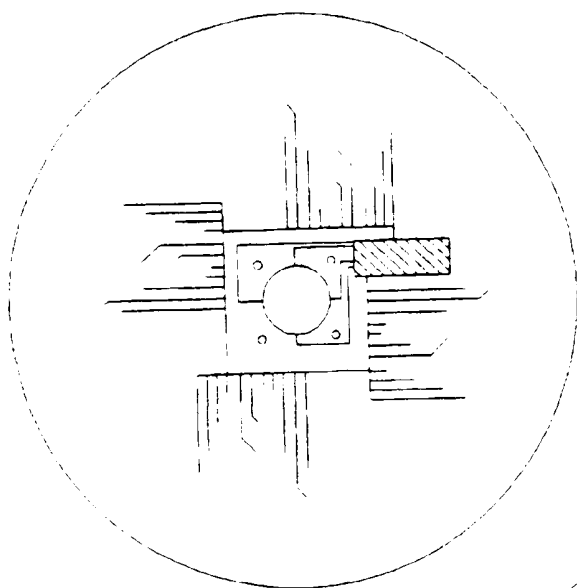


FIG. 17C

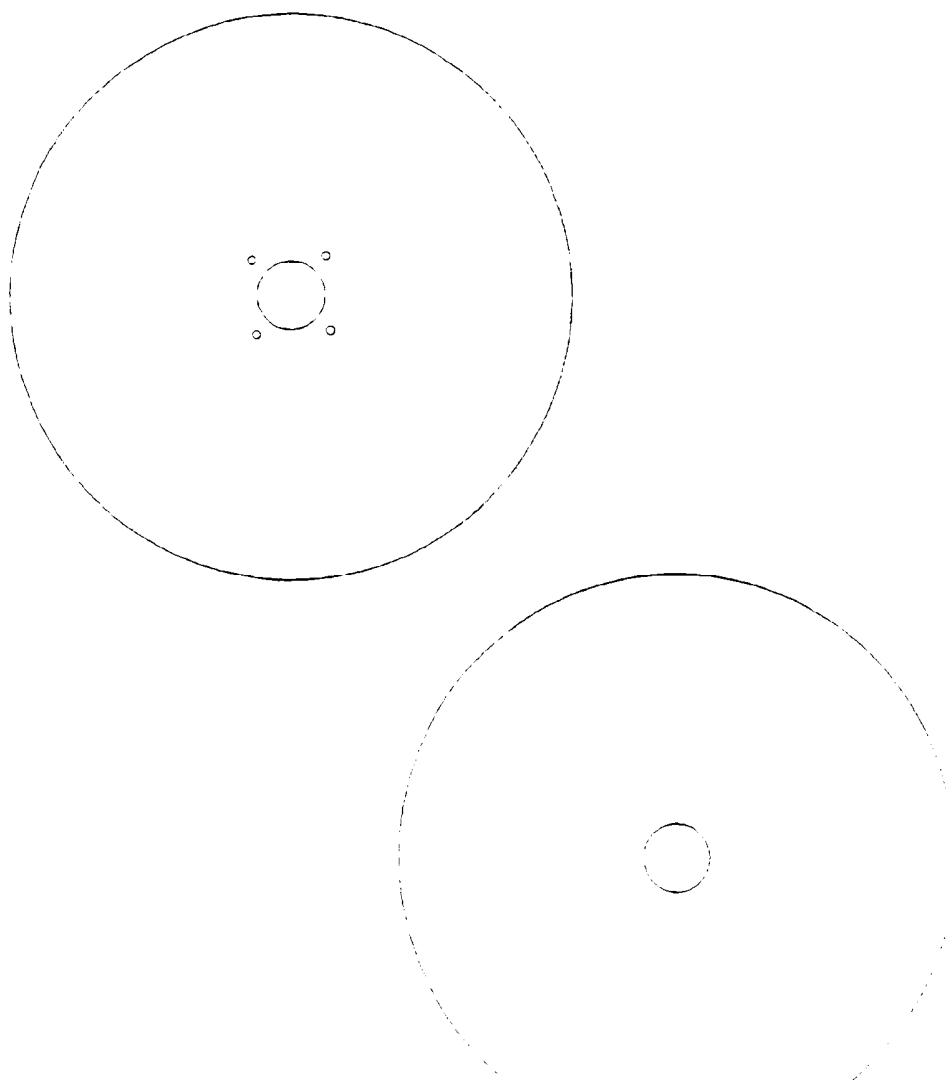


FIG. 17D

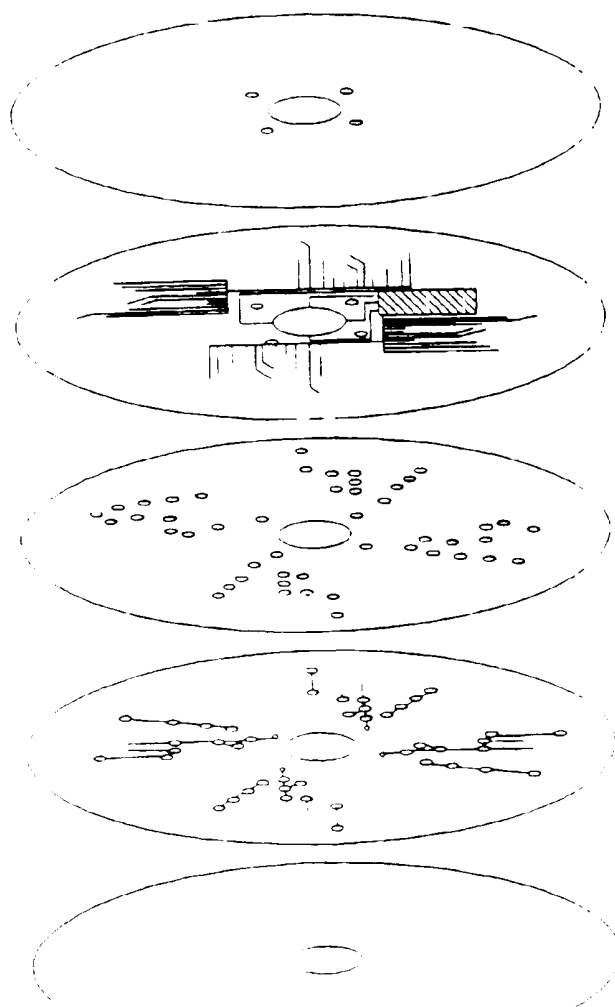


FIG. 17E



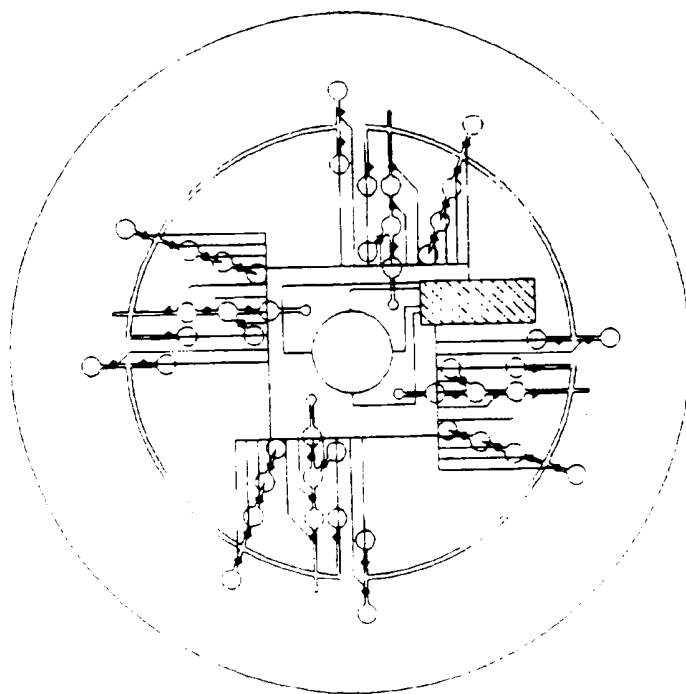



FIG. 17F

36/64

FIG. 17G

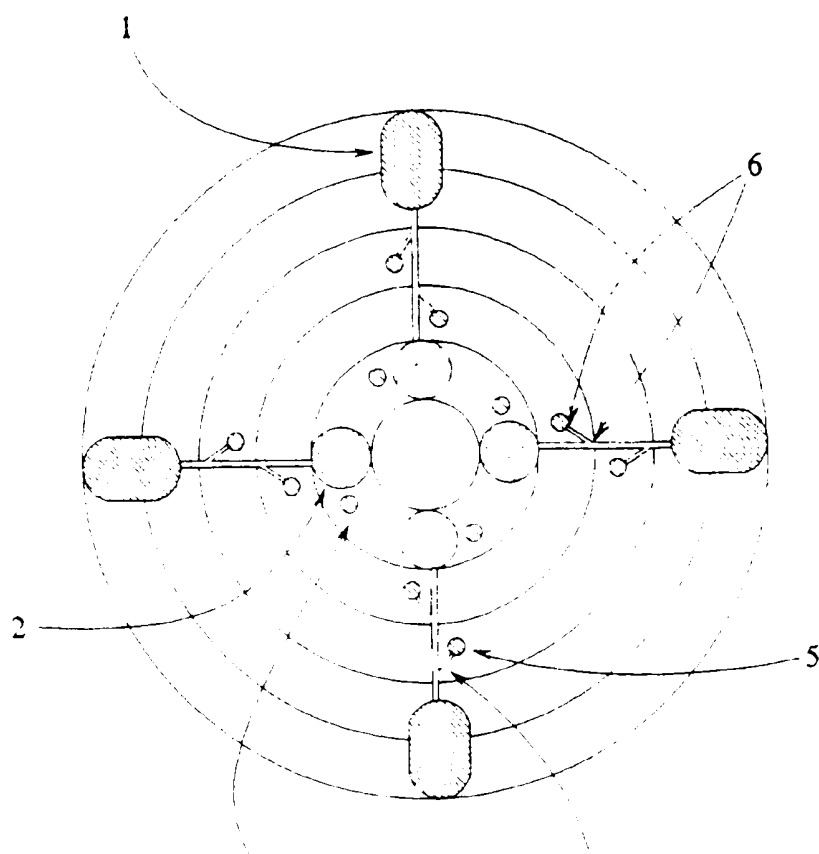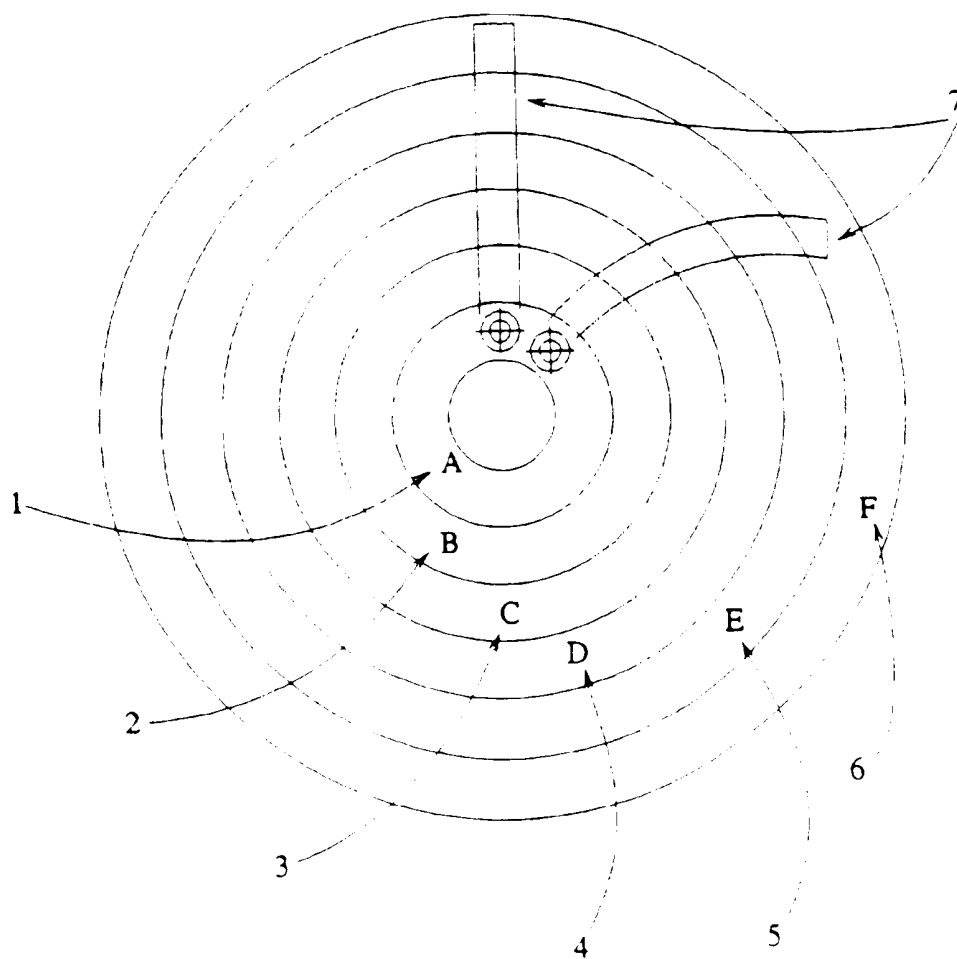

37/64

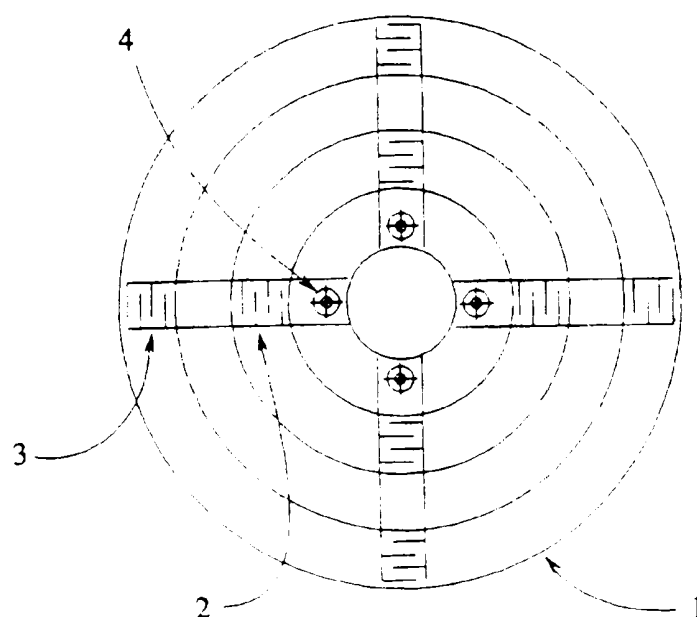FIG. 17H

SUBSTITUTE SHEET (RULE 26)

FIG. 17I

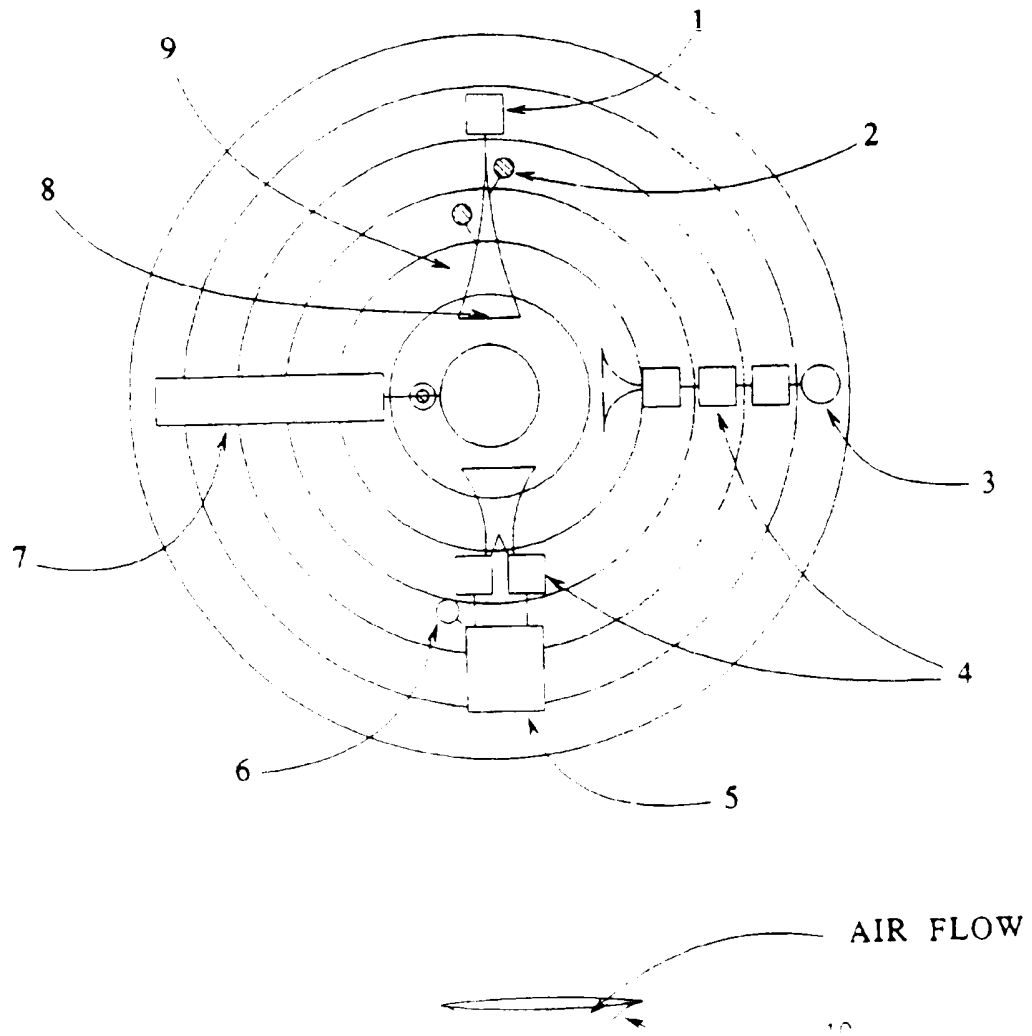


FIG. 17J


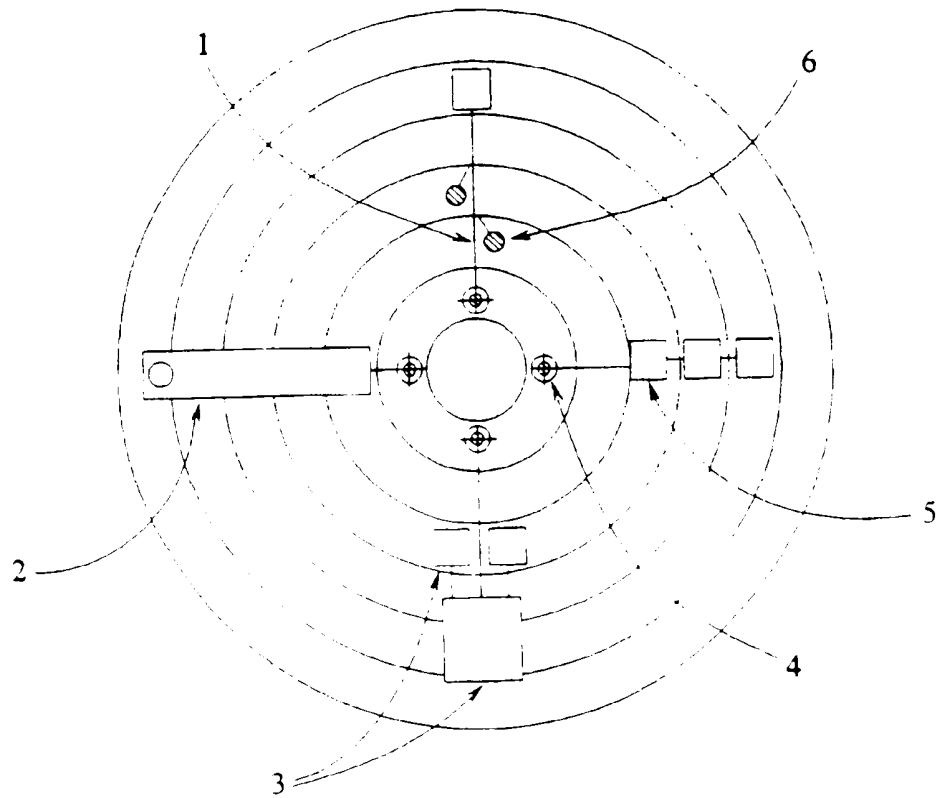


FIG. 17K

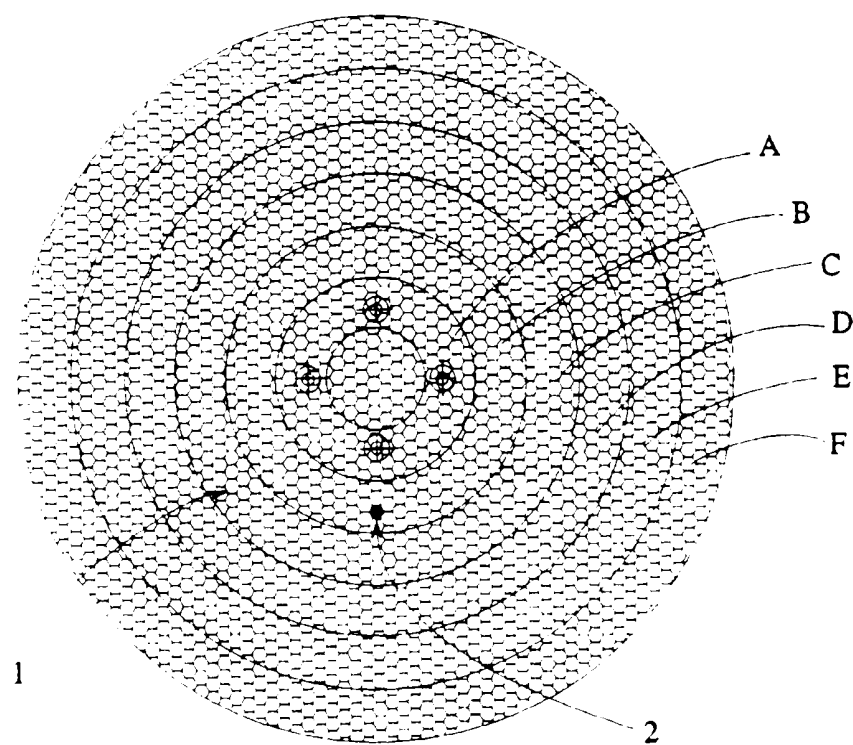

41/64

FIG. 17L

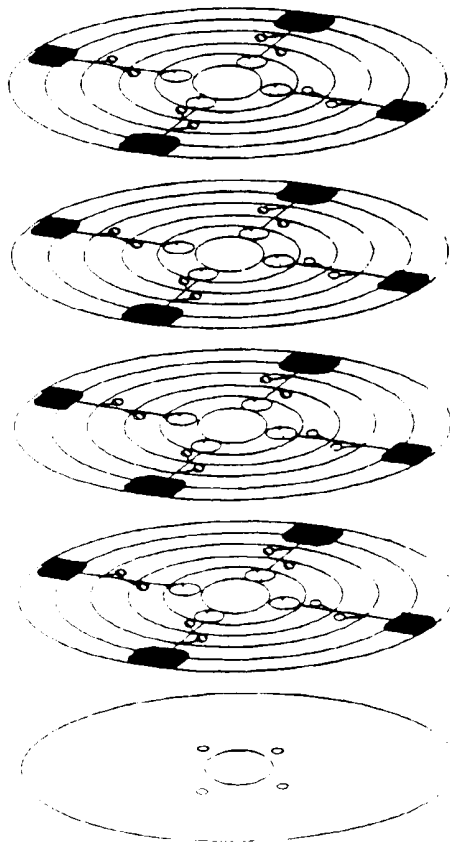


FIG. 17M

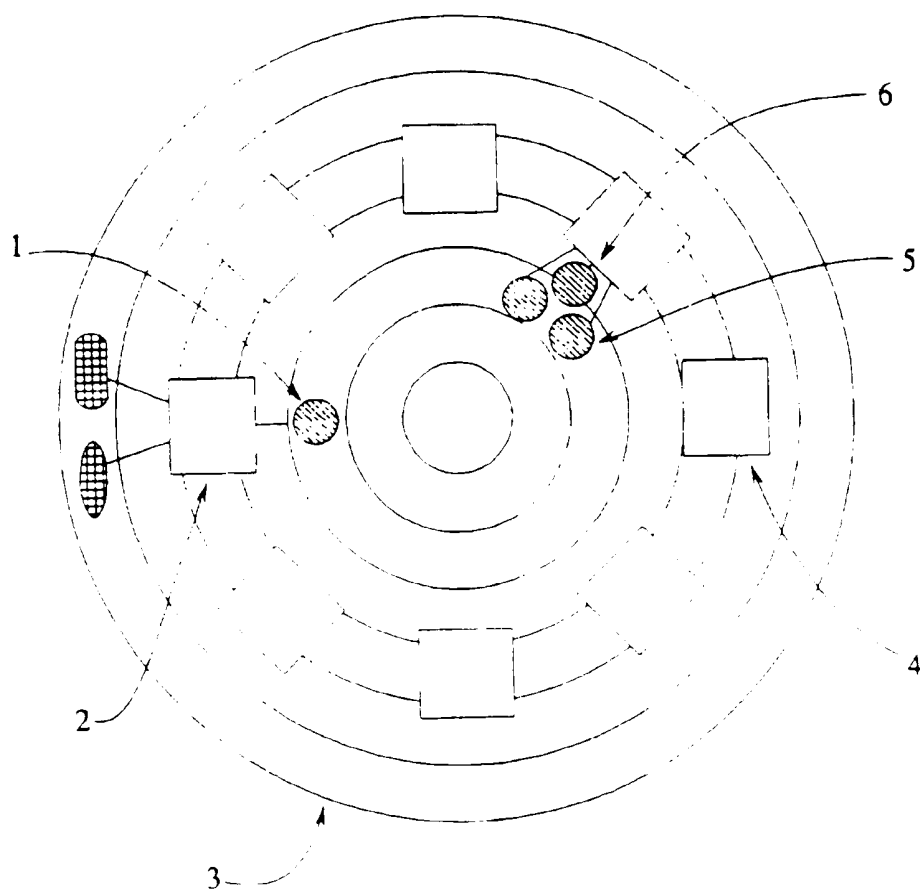


FIG. 170



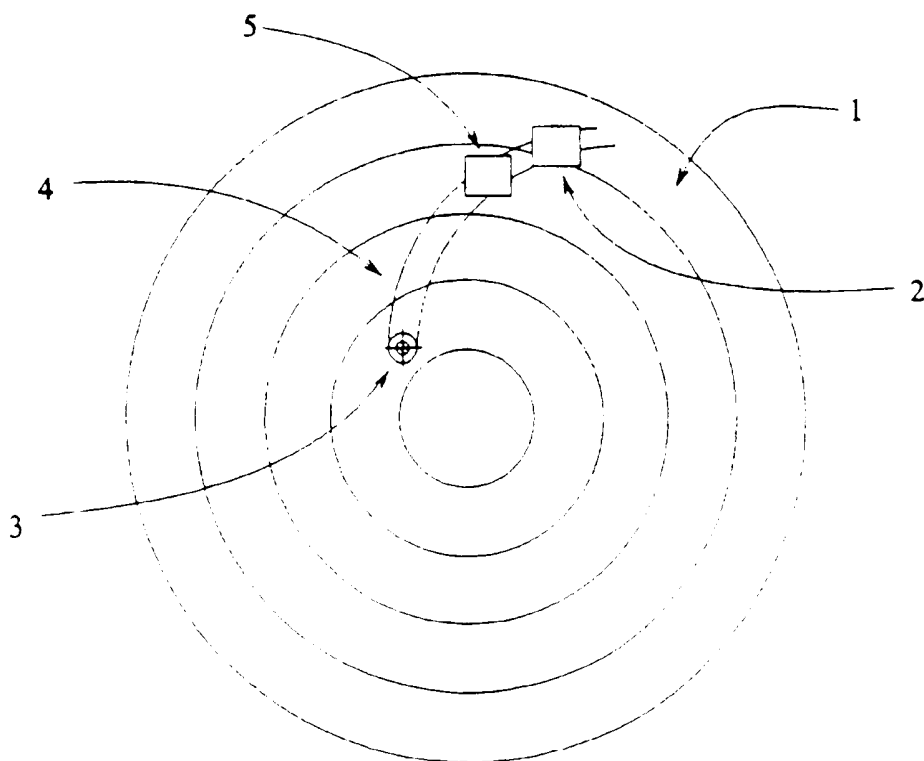


FIG. 17P

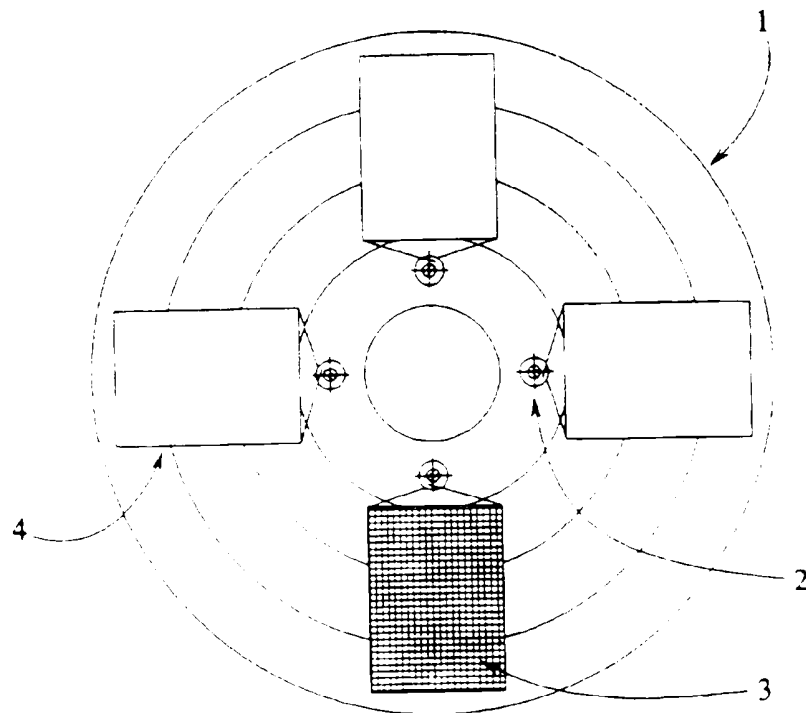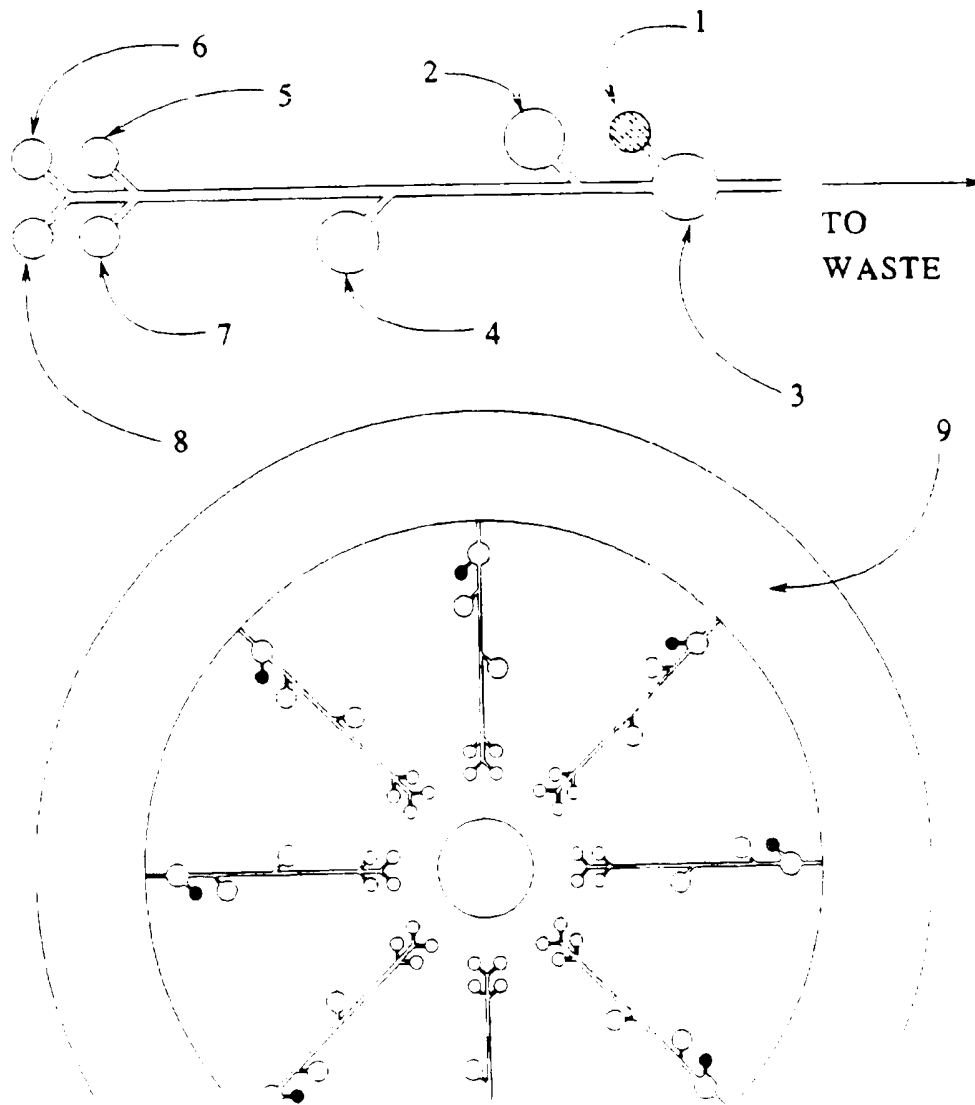



46/64

FIG. 17Q

SUBSTITUTE SHEET (RULE 26)


47/64

FIG. 17R

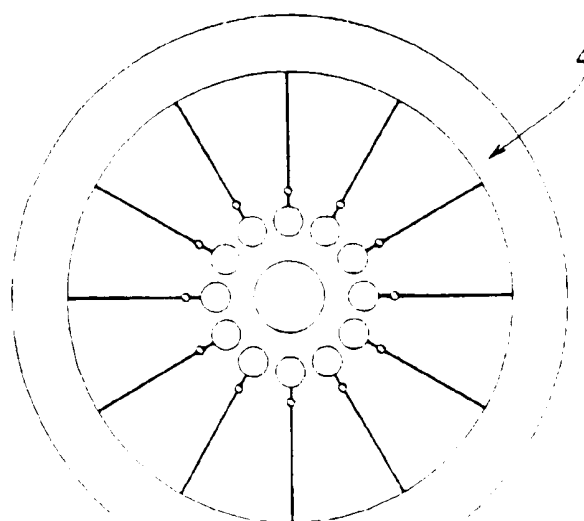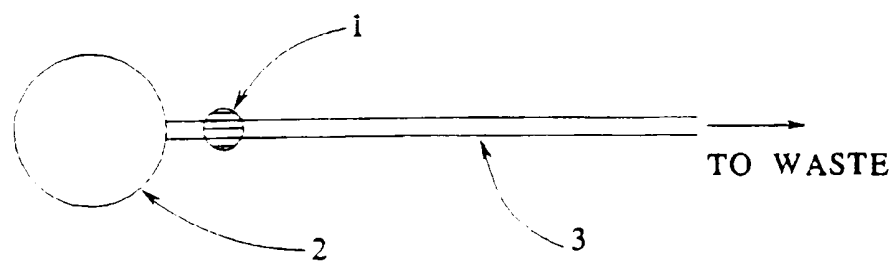


48/64

FIG. 18

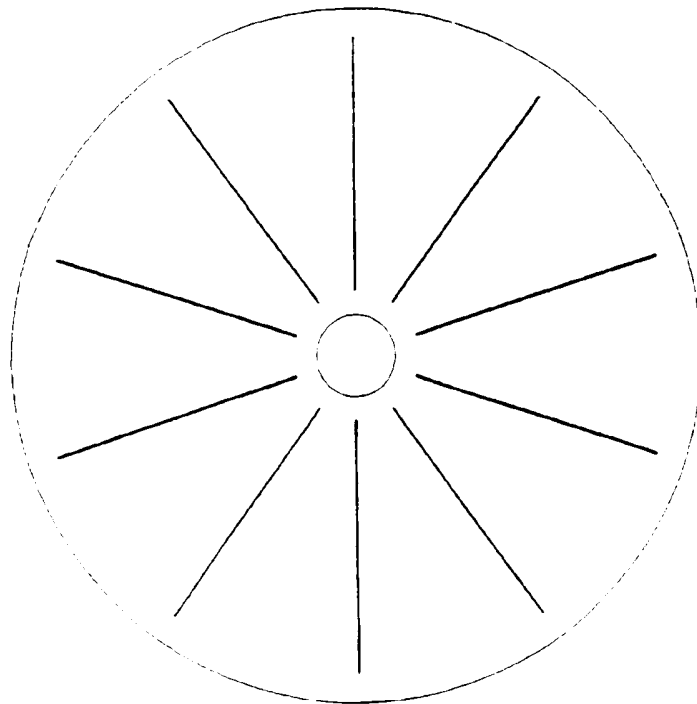


49/64

FIG. 19


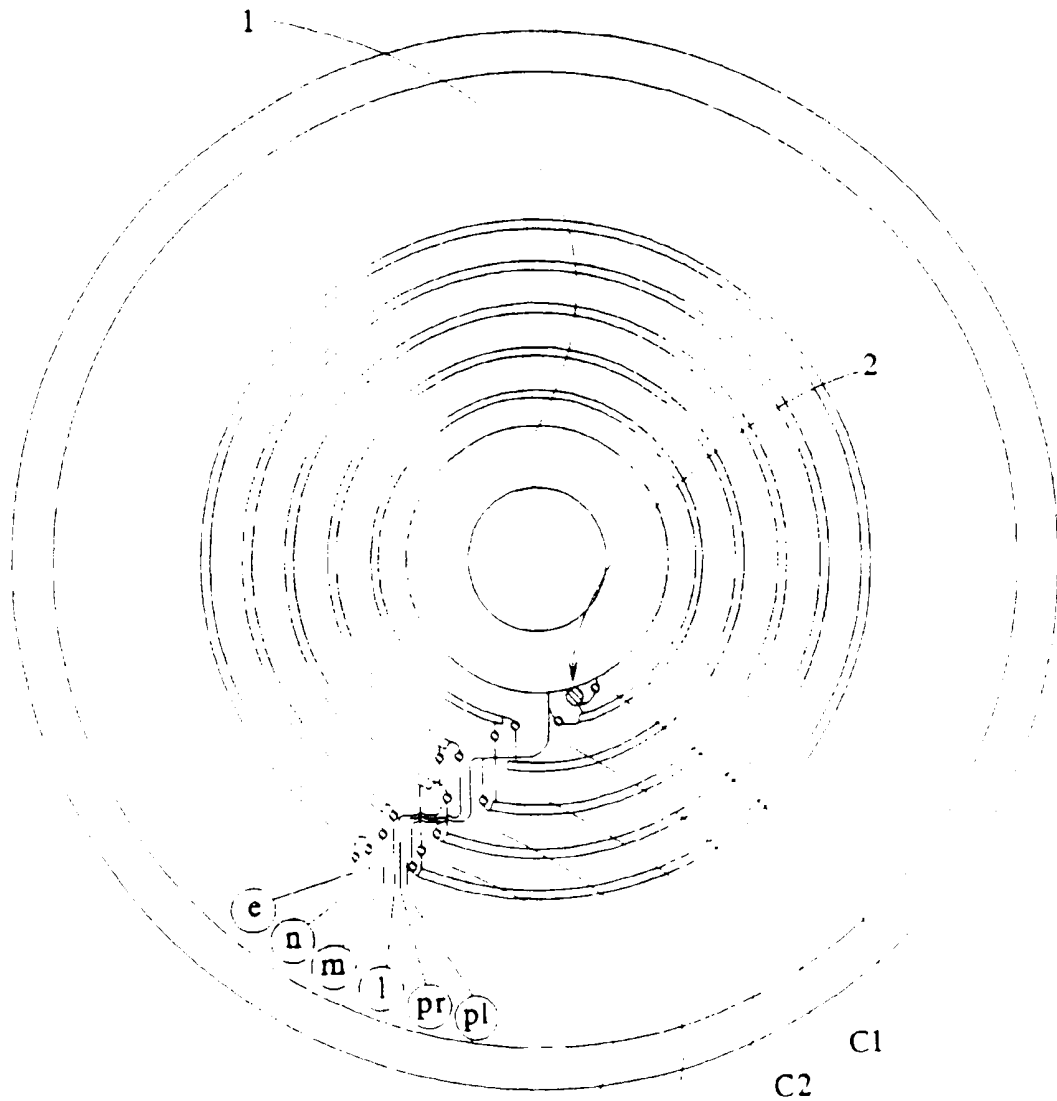


50/64

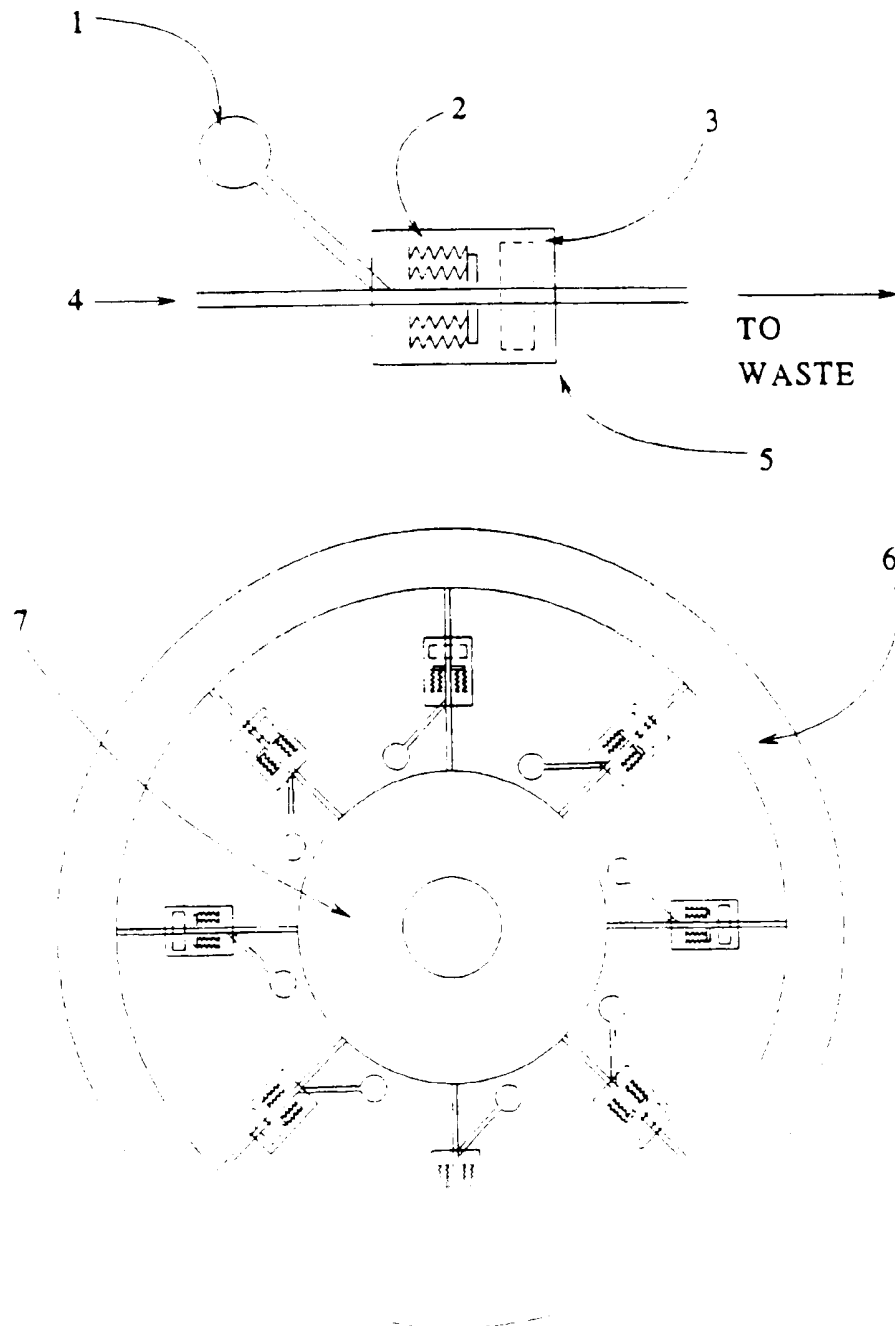FIG. 20

SUBSTITUTE SHEET (RULE 26)

51/64

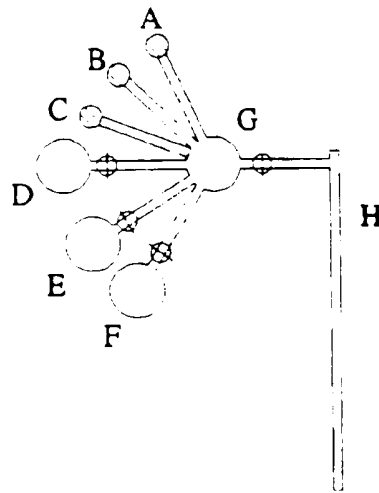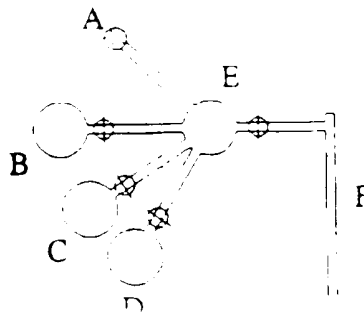FIG. 21FIG. 22


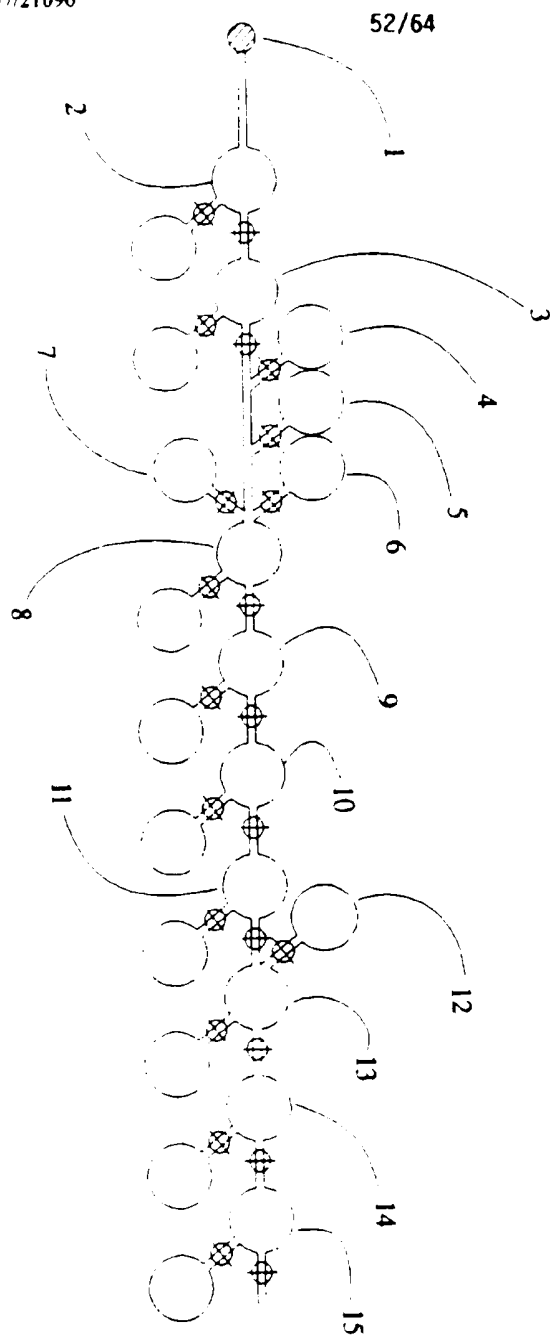



FIG. 23A

53/64

FIG. 23B

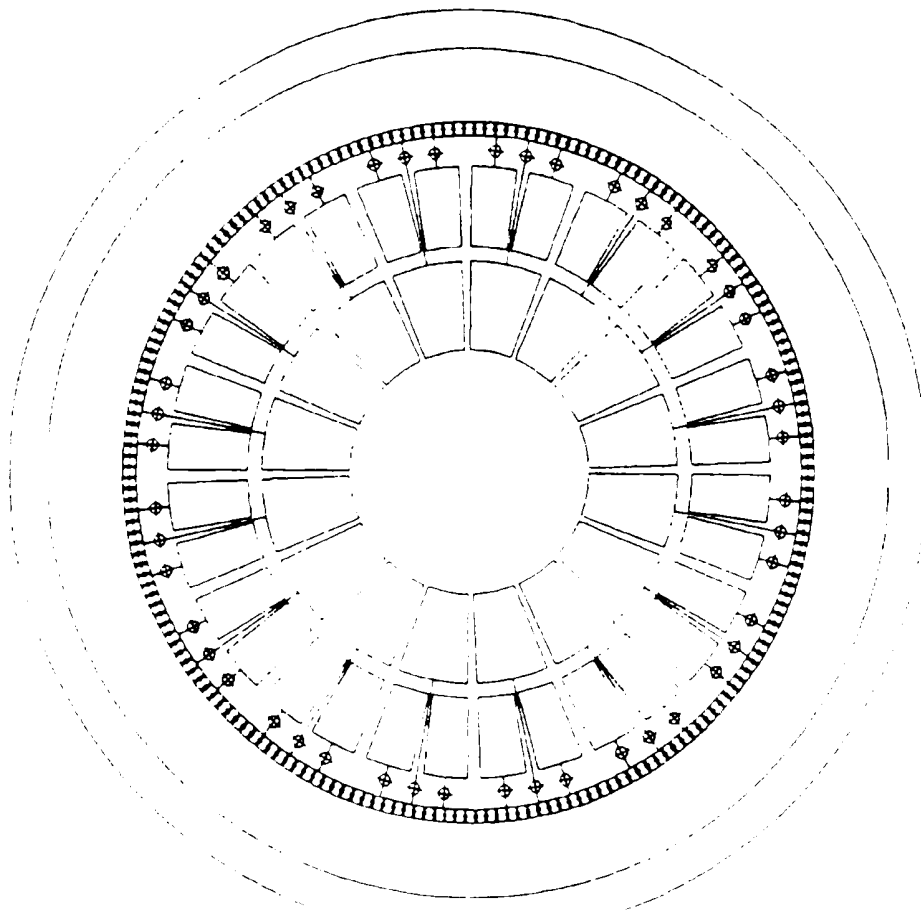


55/64

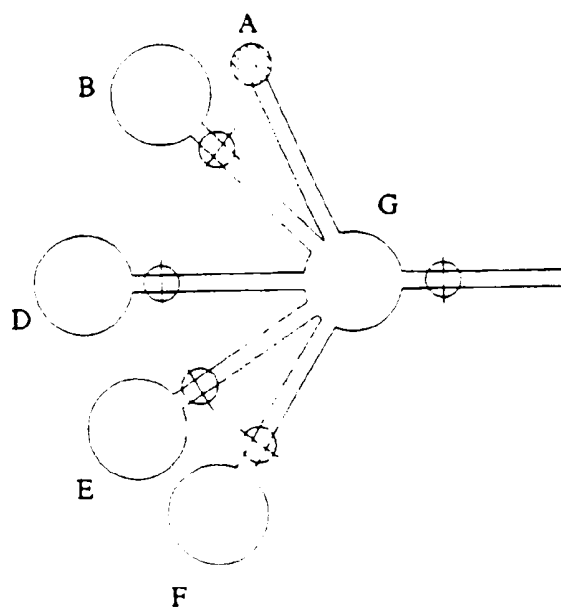FIG. 25


56/64

FIG. 26




57/64

FIG. 27

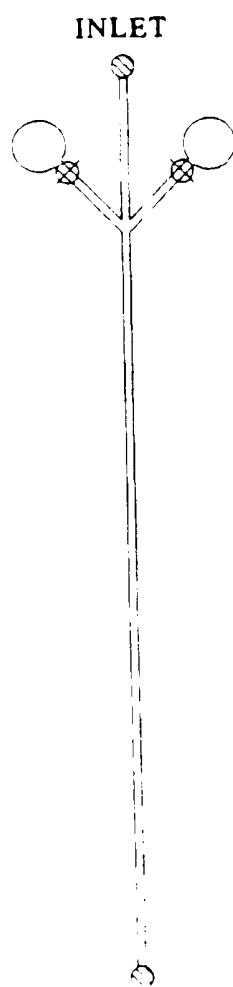


58/64

FIG. 28

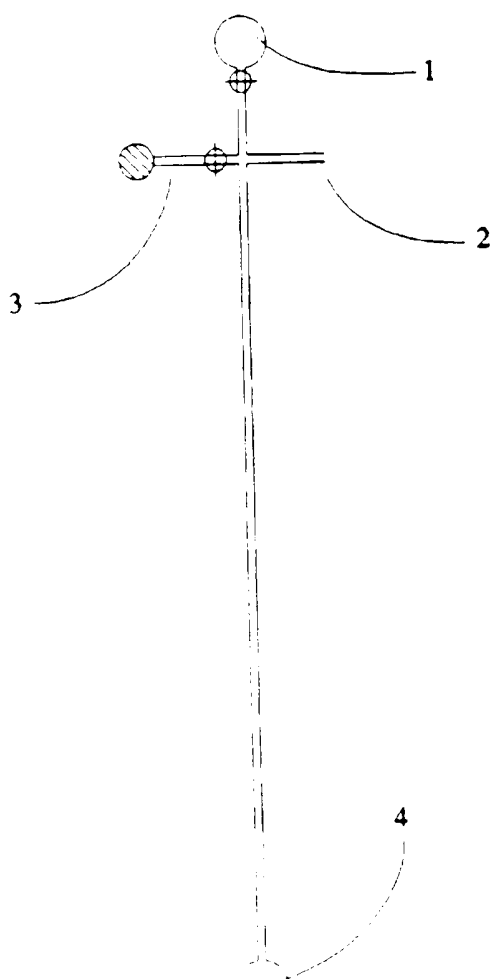

59/64

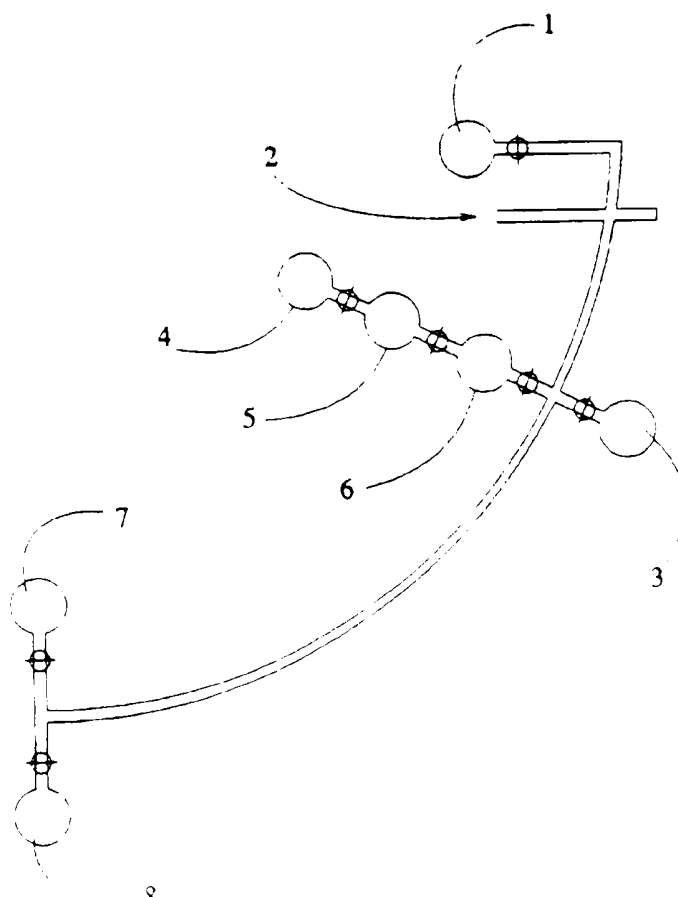FIG. 29

60/64



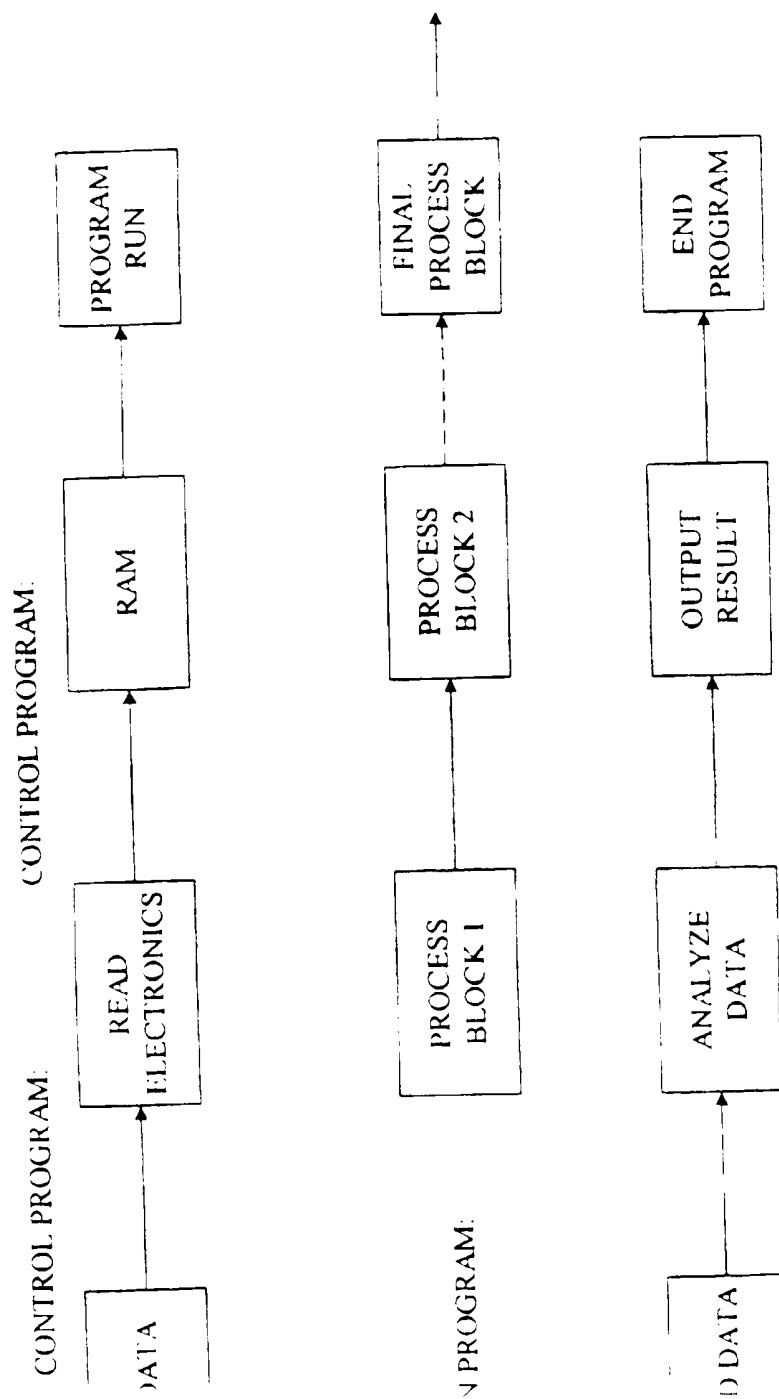
FIG. 30

FIG. 31A

PROGRAM START

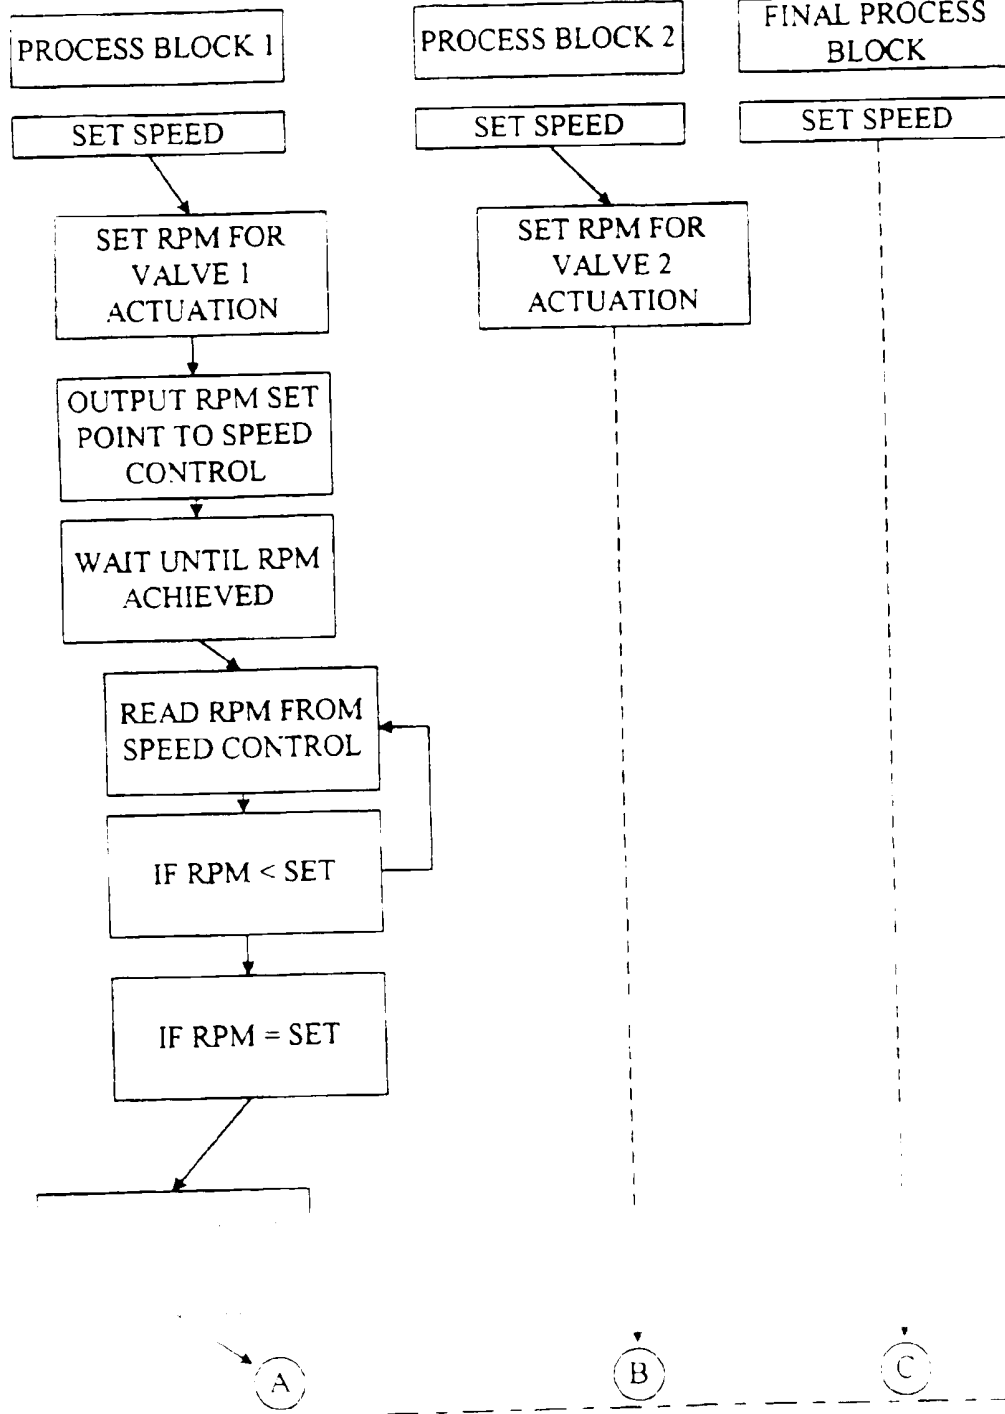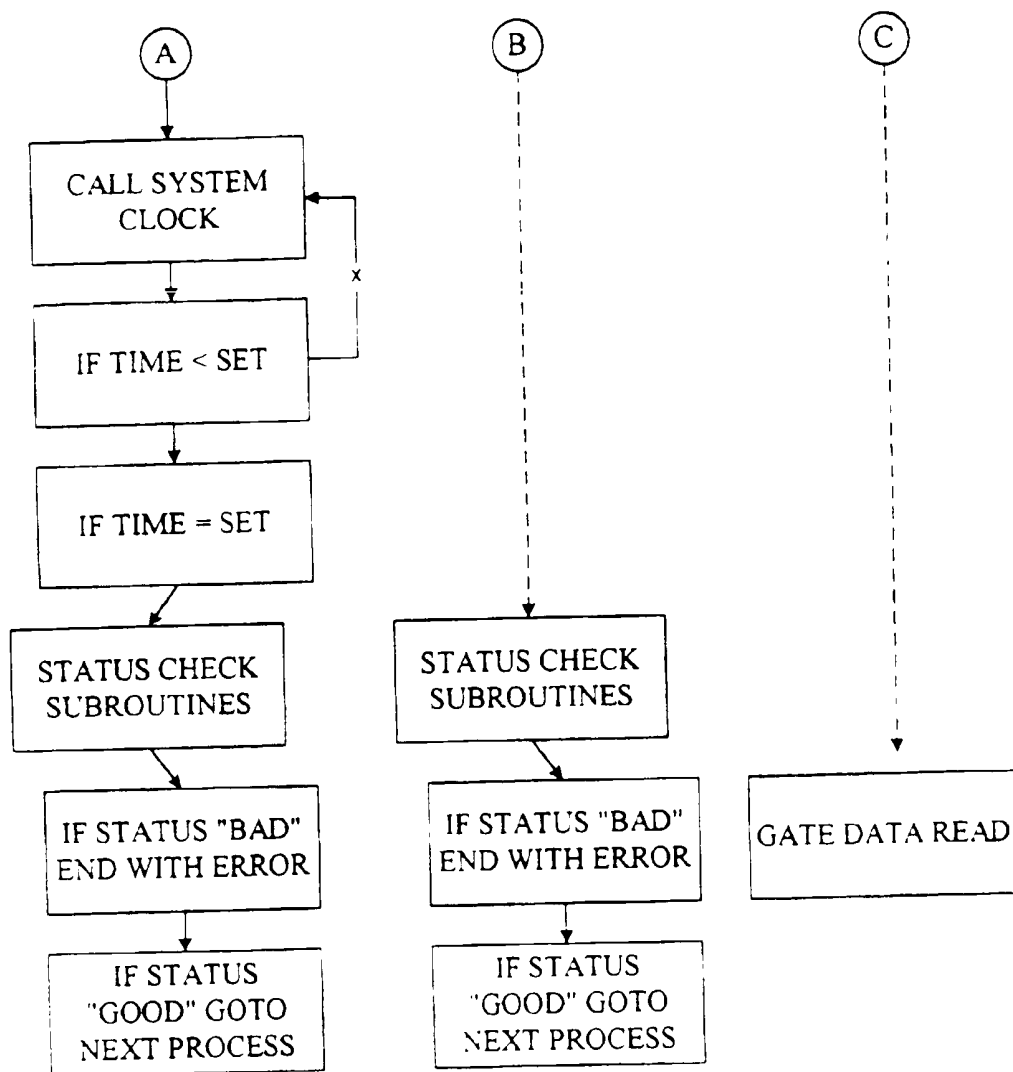


SUBSTITUTE SHEET (RULE 36)

FIG. 31B


63/64

FIG. 32A

PROGRAM START

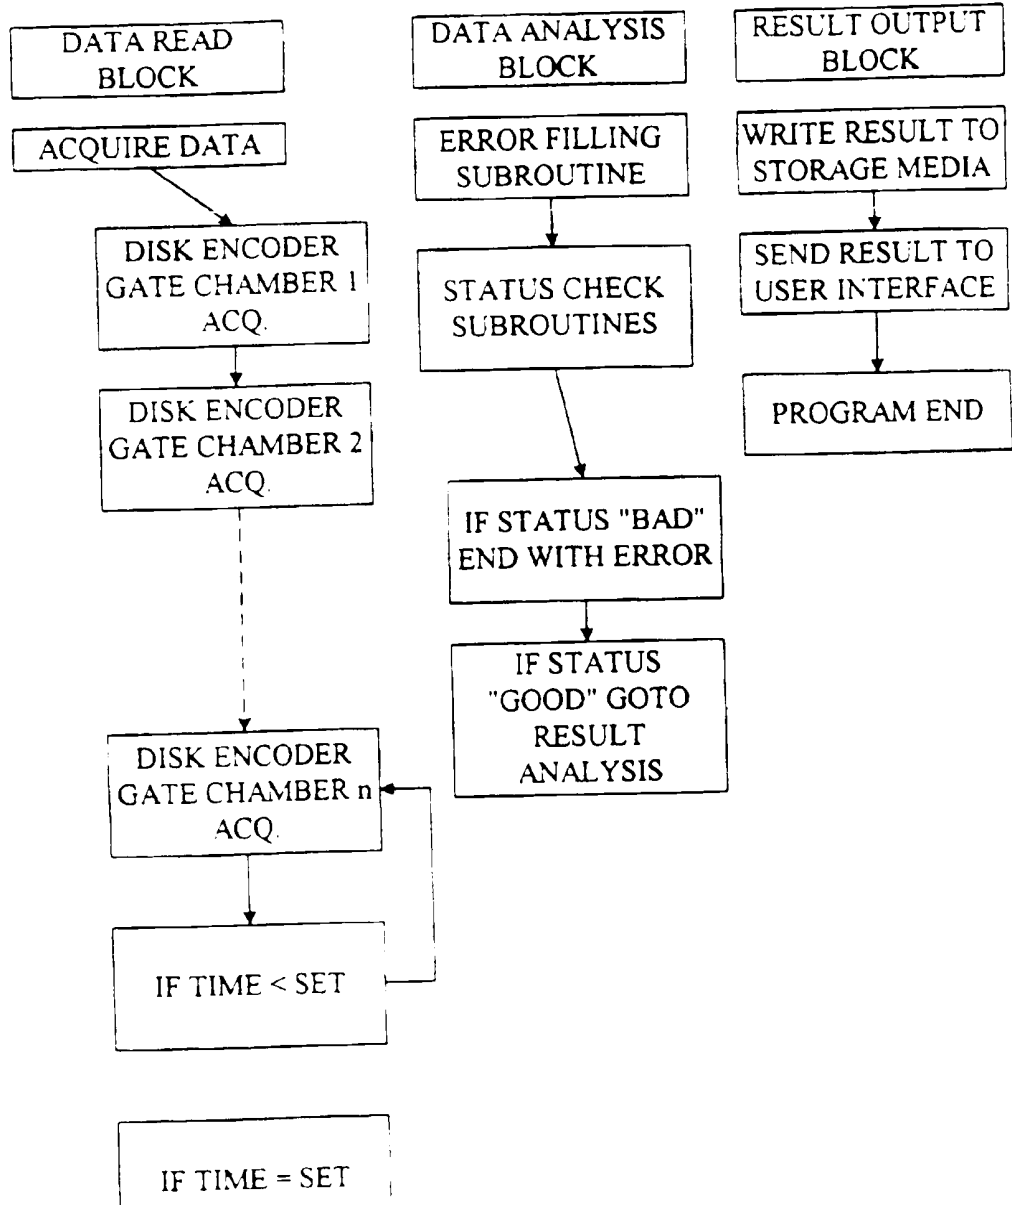

A

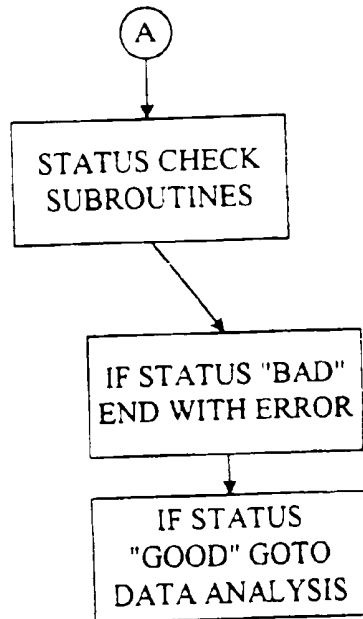FIG. 32B

INTERNATIONAL SEARCH REPORT

International Application No.
PCT/US 96/19514

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 G01N21/07 B01L3/00 G01N33/487

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 6 G01N B01L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	EP 0 417 305 A (IDEMITSU PETROCHEMICAL CO LTD) 20 March 1991	1-33, 35-50, 52-63, 78,82 79
A	see the whole document ---	
Y	EP 0 616 218 A (HITACHI LTD) 21 September 1994 see column 7, line 54 - column 11, line 29 --- -/--	1-21, 30-33, 35-50, 52-63

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubt on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *C* document referring to an oral disclosure, use, exhibition or demonstration

which is published on or after the priority date claim

the actual completion of the international search

17 March 1997

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

Current status

10.03.97

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2210 HV Rijswijk
Tel. +31 (0)1401 340 104
Fax +31 (0)1401 340 101

Authorized officer

Bindon, C

INTERNATIONAL SEARCH REPORT

International Application No.
PCT/US 96/19514

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	CLINICAL CHEMISTRY, vol. 38, no. 9, 1 September 1992, pages 1665-1670, XP000319980 SCHEMBRI C T ET AL: "PORTABLE SIMULTANEOUS MULTIPLE ANALYTE WHOLE-BLOOD ANALYZER FOR POINT-OF-CARE TESTING" see page 1666, left-hand column, last paragraph - page 1668, left-hand column, last paragraph ---	18-20,54
Y	WO 93 22058 A (TRUSTEES OF THE UNIVERSITY OF PENNSYLVANIA) 11 November 1993 cited in the application see the whole document ---	22-29
Y	EP 0 305 210 A (BIOTRACK INC) 1 March 1989 see page 6, line 3 - page 7, line 51 ---	28,29
A	EP 0 322 657 A (MILES INC) 5 July 1989 see the whole document ---	28,29
Y	US 3 679 367 A (NEGERSMITH KENT M) 25 July 1972 see the whole document ---	78,82
A	DE 44 10 224 A (KNOLL MEINHARD) 28 September 1995 see column 2, line 31 - column 4, line 42 ---	64
A	PATENT ABSTRACTS OF JAPAN vol. 016, no. 035 (P-1304), 28 January 1992 & JP 03 245049 A (IDEMITSU PETROCHEM CO LTD), 31 October 1991, see abstract ---	1,80,81
A	US 4 940 527 A (KAZLAUSKAS ET AL) 10 July 1990 see the whole document ---	1-3
A	CLINICAL CHEMISTRY, vol. 40, no. 9, 1 September 1994, pages 1805-1809, XP000444697 ARQUINT P ET AL: "MICROMACHINED ANALYZERS ON A SILICON CHIP" see page 1805 - page 1806 -----	80,81

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No.

PCT/US 96/19514

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 417305 A	20-03-91	JP 3225278 A	04-10-91
		JP 2232563 A	14-09-90
		JP 6023767 B	30-03-94
		JP 2269969 A	05-11-90
		JP 6019359 B	16-03-94
		CA 2028829 A	08-09-90
		WO 9010875 A	20-09-90

EP 616218 A	21-09-94	JP 6265447 A	22-09-94
		US 5480614 A	02-01-96

WO 9322058 A	11-11-93	US 5304487 A	19-04-94
		US 5296375 A	22-03-94
		AT 140025 T	15-07-96
		AT 140880 T	15-08-96
		AU 4222393 A	29-11-93
		AU 4222593 A	29-11-93
		AU 4222693 A	29-11-93
		AU 4222793 A	29-11-93
		AU 4223593 A	29-11-93
		CA 2134474 A	11-11-93
		CA 2134475 A	11-11-93
		CA 2134476 A	11-11-93
		CA 2134478 A	11-11-93
		DE 69303483 D	08-08-96
		DE 69303483 T	06-02-97
		DE 69303898 D	05-09-96
		DE 69303898 T	20-02-97
		EP 0637996 A	15-02-95
		EP 0637997 A	15-02-95
		EP 0639223 A	22-02-95
		EP 0637998 A	15-02-95
		EP 0637999 A	15-02-95
		JP 7506430 T	13-07-95
		JP 7506431 T	13-07-95
		JP 7506256 T	13-07-95
		JP 7506257 T	13-07-95
		JP 7506258 T	13-07-95
		WO 9322053 A	11-11-93
		WO 9322054 A	11-11-93

INTERNATIONAL SEARCH REPORT

Information on patent family members

Int. Application No

PCT/US 96/19514

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9322058 A		WO 9322421 A	11-11-93
		WO 9322055 A	11-11-93
		US 5427946 A	27-06-95
		US 5498392 A	12-03-96
		US 5587128 A	24-12-96
		US 5486335 A	23-01-96
EP 305210 A	01-03-89	US 4868129 A	19-09-89
		US 5077017 A	31-12-91
		AU 615208 B	26-09-91
		AU 2163988 A	02-03-89
		CA 1333850 A	10-01-95
		DE 3886140 D	20-01-94
		DE 3886140 T	19-05-94
		ES 2049254 T	16-04-94
		JP 1257268 A	13-10-89
		JP 7056492 B	14-06-95
		US 4946795 A	07-08-90
EP 322657 A	05-07-89	US 4999304 A	12-03-91
		JP 1297159 A	30-11-89
US 3679367 A	25-07-72	AU 3328471 A	15-03-73
		BE 772569 A	14-03-72
		CA 930568 A	24-07-73
		CH 534871 A	15-03-73
		DE 2145784 A	23-03-72
		FR 2107628 A	05-05-72
		GB 1352256 A	08-05-74
		NL 7112533 A,B,	16-03-72
		SE 373951 B	17-02-75
DE 4410224 A	28-09-95	NONE	
US 4940527 A	10-07-90	AU 602581 B	18-10-90
		AU 1679688 A	01-12-88
		CA 1297946 A	24-03-92
		DE 3888577 D	28-04-94
		DE 3888577 T	04-08-94
		EP 0293858 A	07-12-88

INTERNATIONAL SEARCH REPORT

Information on patent family members

Int. Application No

PCT/US 96/19514

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 4940527 A		ES 2053622 T	01-08-94
		JP 1088147 A	03-04-89
		US 5001417 A	19-03-91
		US 5134359 A	28-07-92
